



AX-X1 Auxiliary contact

1. Compliant standards

IEC60947-5

2. Compliant certification

CE

3. Major function

To achieve long-distance signal indication for the open/close status of the circuit breaker


4. Parameters and performance

Table 1

Utilization category	Rated operating voltage V	Rated operating current A
AC-12	AC 415	3
	AC 240	6
DC-12	DC 130	1
	DC 48	2
	DC 24	6

Action characteristics: Figure 1 shows the wiring diagram for auxiliary contacts.
When the auxiliary contacts is open, terminals 11 and 12 are connected;
When the auxiliary contacts is closed, terminals 11 and 14 are connected.
Life: Operating life of auxiliary contacts is ≥ 10000 cycles.


Figure 1



5. Assembly and installation of the product

Can be assembled with NXB-63, NXB-40 series circuit breakers, with assembly diagram shown below:

Figure 2

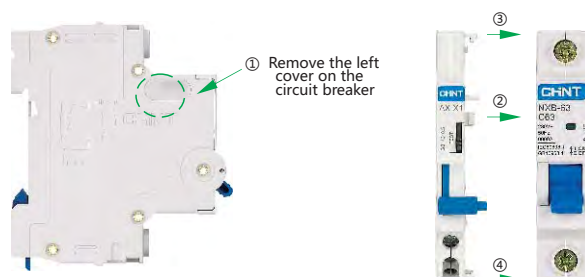

After AX-X1 is assembled with the circuit breaker, mount them on the TH3.5-7.5 steel mounting rail.

6. Dimensions and installation sizes

Figure 3

