

Technical Data Sheet

CODE 17166

LINEO 315 QUIET

Sound-proof mixed flow extractor fans



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50-60	Max airflow at Mid speed at 60 Hz (m³/h)	2460
Insulation class	II°	Max airflow at Min speed (l/s)	702,8
IP	X5	Max airflow at Min speed at 60 Hz (l/s)	505,6
Max absorbed current at maMinx speed at 60 Hz (A)	1,10	Max airflow at Min speed at 60 Hz (m³/h)	1820
Max absorbed current at Max speed (A)	1,55	Max pressure at 60 Hz (mmH2O)	66,9
Max absorbed current at Max speed at 60 Hz (A)	2,25	Max pressure at Max speed (mmH2O)	53,6
Max absorbed current at Mid speed (A)	1,15	Max pressure at Max speed (Pa)	525,7
Max absorbed current at Mid speed at 60 Hz (A)	1,55	Max pressure at Max speed at 60Hz (Pa)	656,1
Max absorbed current at Min speed (A)	0,95	Max pressure at Mid speed (mmH2O)	43,3
Max absorbed power at Max speed (W)	360	Max pressure at Mid speed (Pa)	424,6
Max absorbed power at Max speed at 60 Hz (W)	500	Max pressure at Mid speed at 60Hz (mmH2O)	42,2
Max absorbed power at Mid speed (W)	270	Max pressure at Mid speed at 60Hz (Pa)	413,9
Max absorbed power at Mid speed at 60 Hz (W)	350	Max pressure at Min speed at 60Hz (mmH2O)	25,1
Max absorbed power at Min speed at 60 Hz (W)	250	Max pressure at Min speed at 60Hz (Pa)	246,2
Max ambient temperature for continuous operation (°C)	50	Max RPM	2705
Max continuous operation room temperature at 60 Hz (°C)	50	Max speed at 60 Hz (Rpm)	2980
Nominal diameter (mm)	315	Mid speed at 60 Hz (Rpm)	2285
Power absorbed at 1st speed (W)	215	Min RPM	1930
Voltage (V)	220-240	Min speed at 60 Hz (Rpm)	1700
Weight (Kg)	28,3	Potenza sonora at supply side at Min speed LWA [dB (A)]	68
Airflow at 1st speed (l/s)	575	Pressure at 1st speed (mmH2O)	30,6
Airflow at 1st speed (m³/h)	2070	Pressure at 1st speed (Pa)	300,1
Breakout sound power LWA at Max speed [dB (A)]	67,5	RPM at Mid speed	2360
Breakout sound power LWA at Mid speed [dB (A)]	64,4	Sound power at extract side at Max speed LWA [dB (A)]	75,9
Breakout sound power LWA at Min speed [dB (A)]	60	Sound power at extract side at Mid speed LWA [dB (A)]	73,3
Breakout sound pressure at 3m at Max speed Lp [dB (A)]	47	Sound power at extract side at Min speed LWA [dB (A)]	69,3
Breakout sound pressure at 3m at Mid speed Lp [dB (A)]	43,9	Sound power at supply side at Max speed LWA [dB (A)]	74,9
Breakout sound pressure at 3m at Min speed Lp [dB (A)]	39,5	Sound power at supply side at Mid speed LWA [dB (A)]	72,1
Max airflow at Max speed (l/s)	802,8	Sound pressure at extract side at 3m at Max speed Lp [dB (A)]	58,4
Max airflow at Max speed (m³/h)	2890	Sound pressure at extract side at 3m at Mid speed Lp [dB (A)]	55,8
Max airflow at Max speed at 60 Hz (l/s)	883,3	Sound pressure at extract side at 3m at Min speed Lp [dB (A)]	51,8
Max airflow at Max speed at 60 Hz (m³/h)	3180	Sound pressure at supply side at 3m at Max speed Lp [dB (A)]	57,4
Max airflow at Mid speed (m³/h)	2530	Sound pressure at supply side at 3m at Mid speed Lp [dB (A)]	54,6
Max airflow at Mid speed at 60 Hz (l/s)	683,3	Sound pressure at supply side at 3m at Min speed Lp [dB (A)]	50,5

Dimensions

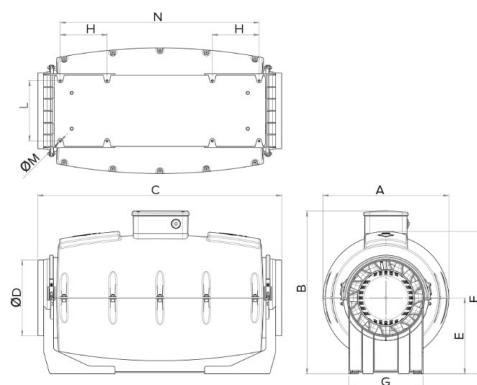

Size A (mm)	415,5
Size B (mm)	496,5
Size C (mm)	940
Size D (mm)	Ø 307
Size E (mm)	244
Size F (mm)	441
Size G (mm)	309
Size H (mm)	110
Size L (mm)	255
Size M (mm)	Ø 8,5
Size N (mm)	780

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 17166

LINEO 315 QUIET


Sound-proof mixed flow extractor fans



Description

- Enclosures made of fire resistant plastic resin, E2 class, according with ISO EN 11925-2: 2010, in areas close to motor and electrical components.
- Casing integrating a sound-absorbing coating, optimized to minimize sound emissions radiated into the environment and transmitted through exhaust and supply ducts.
- Nominal diameter 315 mm.
- Induction motor, thermally protected, with shaft mounted on ball bearing supports, coupled with a centrifugal impeller.
- High water resistance: IPX5 (if installed in a duct).
- Speed adjustable through Vortice speed devices.

Curves

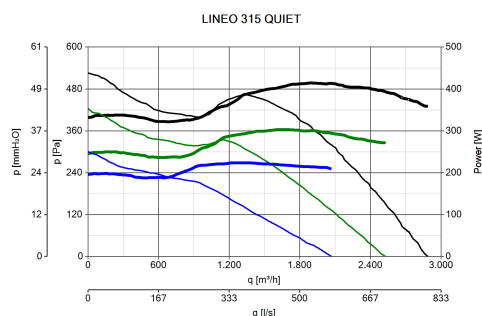

Accessories



TRIO-LINEO 503

Code 12891



C 2.5 (COMANDO EL. 2.5 A)

Code 12967



C HCS

Code 12994



C TIMER

Code 12999



C TEMP

Code 12992



C SMOKE

Code 12993



C PIR

Code 12998



KIT SCB
(TRASF.E.C.)

Code 22481

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com