

Technical Data Sheet

CODE 16108

CA 125 MD

In-line centrifugal fans in metal



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50-60	Airflow at 1st speed (l/s)	78
Insulation class	II°	Airflow at 1st speed (m³/h)	280
IP	44	Max airflow at Max speed (l/s)	125
Max absorbed current at Max speed (A)	0,40	Max airflow at Max speed (m³/h)	450
Max absorbed current at Min speed (A)	0,30	Max pressure at Max speed (mmH2O)	37
Max absorbed Power at 60 Hz (W)	100	Max pressure at Max speed (Pa)	363
Max absorbed power at Max speed (W)	85	Max RPM	2380
Max ambient temperature for continuous operation (°C)	50	Min RPM	1580
Nominal diameter (mm)	125	Pressure at 1st speed (mmH2O)	27
Power absorbed at 1st speed (W)	60	Pressure at 1st speed (Pa)	265
Voltage (V)	220-240	Sound pressure at 3 m - min speed Lp [dB (A)]	30,8
Weight (Kg)	3,00	Sound pressure at 3m at Max speed Lp [dB (A)]	45,9

Dimensions

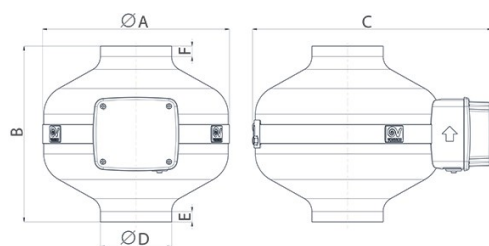

Size A (mm)	255
Size B (mm)	239
Size C (mm)	300
Size D (mm)	122
Size E (mm)	23
Size F (mm)	23

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 16108

CA 125 MD

In-line centrifugal fans in metal




Description

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 125 mm.
- 2 speed AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature,

Relative Humidity, Smoke and Presence.

- Zinc-coated steel brackets for wall mounting.
- IMQ SAFETY and IMQ PERFORMANCE certifications.
- Speed adjustable through Vortice speed control.

Curves

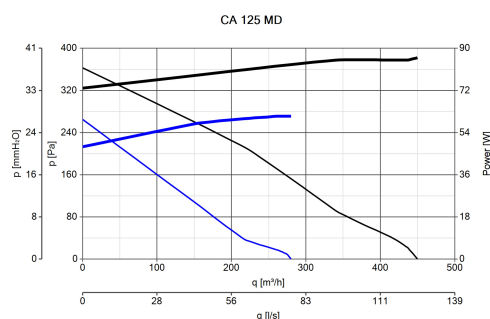

Accessories



KIT SCB (TRASF.E.C.)

Code 22481



CA-MU (STAFFE DI SOSTEGNO)

Code 22674



C 1.5 (COMANDO EL. 1.5 A)

Code 12966



C 2.5 (COMANDO EL. 2.5 A)

Code 12967



TRIO-CA

Code 12869

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com