


PULSA HC6



High performance pins for steel,
hard & pre-stressed concrete

CHARACTERISTICS



MATERIAL

- Orange collated strip
- Shank in carbon steel:
Hardness ≥ 56 HRc
Electrogalvanised,
min. zinc coating 10 μm

PULSA HC6 PINS

RANGE	Length (mm) LT	Code 500 pcs BOX
HC6-15	15	057550
HC6-17	17	057551
HC6-22	22	057552
HC6-27	27	057553
HC6-32	32	057554
HC6-50	50	057701
HC6-57	57	057702
HC6-65	65	057703

PULSA GAS TOOLS

PULSA P27 (95 joules)



PULSA P40P+ (100 joules)



PULSA P65 (100 joules)



PULSA METAL ACCESSORIES


RANGE	DESCRIPTION	CODE	MATERIAL	FIRE RESISTANCE ⁽¹⁾
P-CLIP	Metal clip for fixing conduits			
	P-CLIP D.16	016988	Galvanised metal sheet DX51	Test report Ref. GS 6.1/22-002-1
	P-CLIP D.20	016990		
	P-CLIP D.25	016993		
TRH-CLIP	Metal clip to hang threaded rod (M6 & M8), chains or suspension cables ⁽²⁾			
	TRH-CLIP	011430	Galvanised metal sheet DC01 Ep. 1,5 mm	Test report ref. CSTB 05-158/A
METAL CABLE TIE	Right angled steel clip for installation of suspended light duty components			
	MCC-0	155721	Galvanised metal sheet S250GD	Test report Ref. GS 6.1/22-002-1
PERFORATED STRIP	Perforated metal strip for fixing conduits to the floor			
	12 x 0,8 - 10 m	056562	Galvanised metal sheet DC01 Ep. 0,8 mm	Test report Ref. GS 6.1/22-002-1
	17 x 0,8 - 10 m	056561		

⁽¹⁾ Tested in accordance with EAD 330232-01-0601 and ISO 834 fire standards.

⁽²⁾ Not suitable for fixing suspended ceilings



PULSA PLASTIC ACCESSORIES

RANGE	HALOGEN FREE ✓	DESCRIPTION	CODE	MATERIAL	INCANDESCENT WIRE TEST/ NEEDLE FLAME TEST	INSTALLATION / WORKING TEMPERATURES
CLIPLEC		All purpose base plate for use with cable ties up to 9 mm wide for fixing conduit & cable ; UV protec- ted (black version)				
		CLIPLEC Black	011203	Polypropylen copolymer	750° IEC 60695-2	-5°C + 35°C -30°C +55°C
		CLIPLEC Grey	053881			
MULTICLIP		Multi-purpose data & cable clip for the fast installation of specialised & standard cables using soft VELCRO™ style straps & plastic cable ties				
		Ø mini 16 Ø maxi 32	565843	Polypropylen	650°C IEC 60695-2	-5°C + 35°C -30°C +55°C
TIE-CLIP		Base plate with cable tie for fixing conduit & cable				
		Ø mini 16 Ø maxi 32	565844	Polyamid 6.6	650°C IEC 60695-2	-5°C +35°C -40°C +70°C
E-CLIP		For fast installation of RNC and rigid conduit				
		E-CLIP D.16	567214	Polypropylen	650°C IEC 60695-2	-5°C + 35°C -30°C +55°C
		E-CLIP D.20	565032			
		E-CLIP D.25	565033			
		E-CLIP D.32	565034			
SC-CLIP ⁽¹⁾		Adjustable clip for fixing rigid conduit				
		SC-CLIP 15-18 ⁽¹⁾	059121	Polypropylen copolymer	650°C IEC 60695-2	-5°C + 35°C -30°C +55°C
		SC-CLIP 20-25 ⁽¹⁾	059122			
		SC-CLIP 25-32 ⁽¹⁾	059123			
P-CLIP		Single and double plastic base for fixing flexible water/electricity pipes				
		P-CLIP 16	567206	Polypropylen	650°C IEC 60695-2	-5°C + 35°C -30°C +60°C
		P-CLIP 20	565082			
		P-CLIP 25	567208			
		P-CLIP 16 x 16	567209			
		P-CLIP 20 x 20	565086			
CABLE BOW		Single and double bows for fixing cables to ceilings				
		S - 8 cables 3 x 1,5	565915	Polyamid 6 Light grey colour	650°C IEC 60695-2	-5°C + 35°C -20°C +70°C
		D - 16 cables 3 x 1,5	565916			
		S - 8 cables 3 x 1,5 FIRE	565917	Polyamid 6 - GW960 Dark grey colour	960°C IEC 60695-2	
		D - 16 cables 3 x 1,5 FIRE	565918			
G-CLIP		Plastic holder for fixing bundling cables				
		20C - 20 cables 3 x 1,5	059107	Polyamid 6	650°C IEC 60695-2 IEC 60695-11-5	-5°C + 35°C -20°C +70°C
		40C - 40 cables 3 x 1,5	059108			

⁽¹⁾ Important: Tighten to the maximum clip position (and at least 3 notches).



PIN SELECTION GUIDE

FIXING METAL TRACKS FOR DRYWALLERS			CONCRETE BASE MATERIAL	HC6-15	HC6-17	HC6-22	HC6-27	HC6-32	HC6-50	HC6-57	HC6-65
METAL TRACKS on floors, walls and ceilings		Spacing between partition studs: 600 mm	C20/25	◆	◆	◆	◆				
			C30/37 to C50/60	◆	◆	◆					
			Pre-stressed slab / Hollow concrete slab ⁽¹⁾	◆	◆						
METAL TRACKS through insulation, on ceiling		Spacing between partition studs: 600 mm	C20/25						◆	◆	◆
			C30/37 to C50/60						◆	◆	
		Insulation thickness: 45 mm max.	Pre-stressed slab / Hollow concrete slab ⁽¹⁾						◆		
FIXING ACCESSORIES FOR ELECTRICIANS			CONCRETE BASE MATERIAL	HC6-15	HC6-17	HC6-22	HC6-27	HC6-32	HC6-50	HC6-57	HC6-65
		Metal clip TRH-CLIP Clip MCC-O Perforated metal strip	C20/25	◆	◆	◆	◆				
			C30/37 to C50/60	◆	◆	◆					
			Pre-stressed slab / Hollow concrete slab ⁽¹⁾	◆	◆						
		CLIPLEC MULTICLIP TIE-CLIP E-CLIP SC-CLIP ⁽²⁾ P-CLIP Cable bow G-CLIP	C20/25			◆	◆				
			C30/37 to C50/60			◆	◆				
			Pre-stressed slab / Hollow concrete slab ⁽¹⁾			◆	◆				
FIXING WOOD			CONCRETE BASE MATERIAL	HC6-15	HC6-17	HC6-22	HC6-27	HC6-32	HC6-50	HC6-57	HC6-65
WOOD STRUCTURES on floors and ceilings		Thickness of part to be fixed: 10 - 20 mm	C20/25				◆	◆			
			C30/37 to C50/60				◆	◆			
			Pre-stressed slab / Hollow concrete slab ⁽¹⁾				◆	◆			
	Thickness of part to be fixed: 25 - 45 mm	C20/25						◆	◆	◆	
		C30/37 to C50/60						◆	◆	◆	
		Pre-stressed slab / Hollow concrete slab ⁽¹⁾						◆	◆	◆	
VARIOUS FIXINGS			STEEL BASE MATERIAL	HC6-15	HC6-17	HC6-22	HC6-27	HC6-32	HC6-50	HC6-57	HC6-65
Various fixings on steel	Thickness of part to be fixed: LT - 7 mm max.	$f_{uk} = 410-450 \text{ N/mm}^2$	◆	◆							

⁽¹⁾ Maximum embedment value to be respected to avoid damaging the prestressing reinforcement. The substrates used must comply the following embedment of the underlying concrete element pre-stressing rods: embedment greater than 17 mm in pre-stressed slabs, and 25 mm in hollow concrete slabs.

⁽²⁾ For SC-CLIP, use only HC6-27 pins

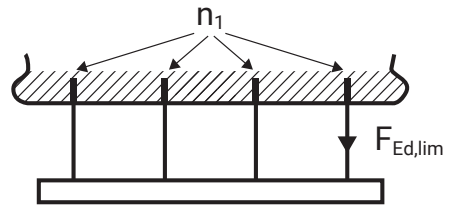


PERFORMANCES FOR NON STRUCTURAL APPLICATIONS


Design principle :

- Non-structural applications
- Redundant systems with aligned fixing points $\geq n_1$


The principle of redundant systems allows the redistribution of loads in case of excessive slip or failure of one fastener to neighbouring fasteners: $n_1 \cdot F_{Rd} \geq F_{Ed}$




NON CRACKED CONCRETE

REDUNDANT SYSTEMS		EMBEDMENT DEPTH [mm] h_{nom}	CHARACTERISTIC / DESIGN RESISTANCES [kN]		ACTIONS at ULS (Ultimate Limit State) F_{Rd} [kN]			
 $n_1 \geq 4$; $F_{Ed,lim} \leq 0,6 \text{ kN}$ $n_1 \cdot F_{Rd} \geq F_{Ed}$			F_{Rk}	F_{Rd}	$n_1 = 3$	$n_1 = 4$	$n_1 = 5$	$n_1 = 6$
Pre-stressed slab / Hollow concrete slab ⁽¹⁾	Non cracked concrete C20/25 to C50/60	10 - 12 mm	0,34	0,23	0,68	0,91	1,13	1,36
		13 - 17 mm	0,66	0,44	1,32	1,76	2,20	2,64
		18 - 19 mm	1,19	0,79	2,38	3,17	3,97	4,76
		20 mm	1,41	0,94	2,82	3,76	4,70	5,64

CRACKED CONCRETE

REDUNDANT SYSTEMS ETA 22/0439 (Category 2b)		EMBEDMENT DEPTH	CHARACTERISTIC / DESIGN RESISTANCES		ACTIONS at ULS (Ultimate Limit State)		
 $n_1 \geq 6$; $F_{Ed,lim} \leq 0,3 \text{ kN}$ $n_1 \cdot F_{Rd} \geq F_{Ed}$					F_{Rd}		
		[mm]	[kN]				
		h_{nom}	F_{Rk}	F_{Rd}	$n_1 = 6$	$n_1 = 8$	$n_1 = 10$
Pre-stressed slab / Hollow concrete slab ⁽¹⁾	Cracked concrete C20/25 to C50/60	15 - 17 mm	0,05	0,033	0,20	0,27	0,33

STEEL

REDUNDANT SYSTEMS		EMBEDMENT DEPTH	CHARACTERISTIC / DESIGN RESISTANCES		ACTIONS at ULS (Ultimate Limit State)		
 $n_1 \geq 3$; $F_{Ed,lim} \leq 2 \text{ kN}$ $n_1 \cdot F_{Rd} \geq F_{Ed}$			[kN]		F_{Rd} [kN]		
		h_{nom}	F_{Rk}	F_{Rd}	$n_1 = 3$	$n_1 = 4$	$n_1 = 5$
Steel base material	$f_{uk} = 350\text{-}500 \text{ N/mm}^2$ Max. grade ST52/S355	6,5 mm	2,60	1,73	5,20	6,93	8,67
		7,5 mm	2,90	1,93	5,80	7,73	9,67
		8,5 mm	3,20	2,13	6,40	8,53	10,67

⁽¹⁾ Maximum embedment value to be respected to avoid damaging the prestressing reinforcement. The substrates used must comply the following embedment of the underlying concrete element pre-stressing rods: embedment greater than 17 mm in pre-stressed slabs, and 25 mm in hollow concrete slabs.



PERFORMANCE FOR FIXING TRACKS FOR PLASTERBOARD PARTITIONS

Design principle:

Cracked concrete, performances according to category 4.

A minimum of 5 aligned fixing points is required to guarantee the safety of the system. The principle of redundant systems allows the redistribution of loads in case of excessive slip or failure of one fastener to neighbouring fasteners: $n_1 \cdot V_{Rd} \geq V_{Ed}$

Shear force applied to plasterboard partition tracks:

$$V_{Ed} = H \cdot S$$

with H : Horizontal action acting on the rail kN/ml for spacing between partition studs of 0,6 m.

$$H = \gamma_F \times 0,3 \times W_a \times H_t / (100 \times 0,6) / 2$$

S : Spacing between fixings [m]

H_t : Partition height [m]

W_a : Partition weight [kg/m²]

$V_{Ed,lim}$: Design shear resistance per fixing point below which it is not necessary to check the rigidity of the system.

The design principle of dimensioning tracks for plasterboard partitions is defined in ETA 23/0508 for the HC6 pins, in accordance with EAD 330083-03-0601 category 4. HC6-17 pins are approved for cracked concrete, comply with DTU 25.41 revised in 2022, and can be used on the underside of slabs.

FIXING TRACKS FOR PLASTERBOARD PARTITIONS ETA 23/0508 (Category 4)		EMBEDMENT DEPTH [mm] h_{nom}	CHARACTERISTIC / DESIGN RESISTANCES [kN] V_{Rk} V_{Rd}		SPACING BETWEEN PINS DEPENDING ON PARTITION WEIGHT W_a AND PARTITION HEIGHT H_t		
$n_1 \geq 5$; $V_{Ed,lim} \leq 0,6$ kN $V_{Ed} = H \cdot s$			$W_a = 10$ kg/m ² $H_t = 2,0$ m	$W_a = 12$ kg/m ² $H_t = 2,0$ m	$W_a = 15$ kg/m ² $H_t = 3,0$ m		
Pre-stressed slab / Hollow concrete slab ⁽¹⁾	Cracked concrete C20/25 to C50/60	13 mm	0,56	0,37	50 cm	40 cm	20 cm

FIXING TRACKS FOR PLASTERBOARD PARTITIONS Test report GS 6.1/22-0026-1 ETA 23/0508 (Category 4)		EMBEDMENT DEPTH	CHARACTERISTIC RESISTANCE UNDER FIRE EXPOSURE [kN]			
 ⊠ Rail thickness: 0,6 mm ⊠ Configuration: 3 pins /ml ⊠ $F_{Rd,fi} = F_{Rk,fi} / \gamma_{M,fi}$ with $\gamma_{M,fi} = 1$		[mm] h_{nom}	30 minutes $F_{Rk,fi,30}$	60 minutes $F_{Rk,fi,60}$	90 minutes $F_{Rk,fi,90}$	120 minutes $F_{Rk,fi,120}$
Concrete	Cracked concrete C20/25 to C50/60	13 mm	0,268	0,200	0,130	0,095




PERFORMANCE FOR LIGHT CABLE TRAY FIXINGS

Density of fixing points:

☒ Horizontal cable tray: 0,40 m for non-reinforced cables
0,75 m for reinforced cables


☒ Vertical cable tray: 1,00 m for all cable types

LIGHT-WEIGHT CABLE TRAY FIXINGS Technical approval CSTB no. 3.1/22-1062  ☒ $n_1 \geq 10$ ☒ $F_{Ed,lim} \leq 0,1 \text{ kN/ml}$	BASE MATERIAL	EMBEDMENT DEPTH	DESIGN RESISTANCES PIN & ACCESSORY SYSTEM [kN]	ACTIONS at ULS (Ultimate Limit State) PER EACH METER LENGTH F_{Ed}/ml [kN]		
	Concrete Pre-stressed slab / Hollow concrete slab ⁽¹⁾	[mm] h_{nom}	$F_{Rd,syst}$	S = 0,40 m	S = 0,75 m	S = 1,00 m
METAL P-CLIP D.16 to D.25	Cracked concrete C20/25 to C50/60	12 - 15 ⁽¹⁾ mm	0,15	0,37	0,20	0,15
CLIPLEC						
MULTICLIP						
SC-CLIP ⁽²⁾						
G-CLIP ⁽²⁾ (wall & ceiling applications)						
TIE-CLIP	Cracked concrete C20/25 to C50/60	12 - 15 ⁽¹⁾ mm	0,035	0,087	0,045	0,035
E-CLIP						
P-CLIP SINGLE						
P-CLIP DOUBLE						
SINGLE CABLE BOW						
DOUBLE CABLE BOW						

⁽¹⁾ Maximum embedment value to be respected to avoid damaging the prestressing reinforcement. The substrates used must comply the following embedment of the underlying concrete element pre-stressing rods: embedment greater than 17 mm in pre-stressed slabs, and 25 mm in hollow concrete slabs.

⁽²⁾ Not covered by CSTB no. 3.1/22-1062.

SECURING CEILING LIGHTS

LIGHT FIXINGS, SECURING CEILING LIGHTS  ☒ $n_1 \geq 10$ ☒ $F_{Ed,lim} \leq 0,1 \text{ kN/ml}$	BASE MATERIAL	EMBEDMENT DEPTH	DESIGN RESISTANCES PIN & ACCESSORY SYSTEM [kN]
	Concrete Pre-stressed slab / Hollow concrete slab ⁽¹⁾	[mm] h_{nom}	$F_{Rd,syst}$
MCC-O	Cracked concrete C20/25 to C50/60	12 - 15 ⁽¹⁾ mm	0,30
TRH-CLIP			

⁽¹⁾ Maximum embedment value to be respected to avoid damaging the prestressing reinforcement. The substrates used must comply the following embedment of the underlying concrete element pre-stressing rods: embedment greater than 17 mm in pre-stressed slabs, and 25 mm in hollow concrete slabs.

FIRE PERFORMANCE FOR LIGHT FIXINGS, SECURING CEILING LIGHTS

LIGHT-WEIGHT CABLE TRAY FIXINGS Test report GS 6.1/22-0026-1 Test report ref. CSTB 05-158/A		EMBEDMENT DEPTH	CHARACTERISTIC RESISTANCE UNDER FIRE EXPOSURE [kN]			
 $\boxtimes F_{Rd,fi} = F_{Rk,fi} / \gamma_{M,fi}$ with $\gamma_{M,fi} = 1$		[mm] h_{nom}	30 minutes $F_{Rk,fi,30}$	60 minutes $F_{Rk,fi,60}$	90 minutes $F_{Rk,fi,90}$	120 minutes $F_{Rk,fi,120}$
METAL P-CLIP D.16 to D.25	Cracked concrete C20/25 to C50/60	12 - 15 mm	0,020	0,017	0,013	0,012
MCC-O			0,102	0,087	0,073	0,065
TRH-CLIP			0,250	0,130	0,020	-