

ABS-Lock Loop

Unobtrusive anchorage point with ETA - designed for screwing into a wooden beam



Are you on the lookout for an inconspicuous alternative to a standard roof hook? Our stainless steel ABS-Lock Loop anchor device secures up to 3 individuals whilst they are working on a roof surface. The stainless steel loop (Ø 5mm) is simply screwed onto a load-bearing wooden beam. Once installed, you can hardly see it.

We recommend using this anchor loop with our specially designed PPE kit for roofers: Our ABS Roofer Kit includes a comfortable safety harness, a lanyard equipped with a rope shortener and integrated energy absorber, a tape sling and a practical protective bag.

The anchor loop is installed using the stainless steel screws included in the package. It also includes a laser-etched tab with information on all the relevant standards and specifications.

Substructure

Wood

Application

Pitched Roof

Attachment

screwed

Certification

ETA Assessment EN 795

Force Directions

Lateral

Max. no. of users


3 Persons

Miscellaneous

Stainless Steel

- Please observe the **installation instructions included in ETA-20/0257**
- EN 795:2012, A + CEN/TS 16415:2017
- Virtually invisible anchorage loop
- Designed for load-bearing wooden structures
- The loop is simply screwed onto a wooden rafter (also suitable for over-rafter insulation)
- Minimum rafter dimensions: 60 mm x 120 mm



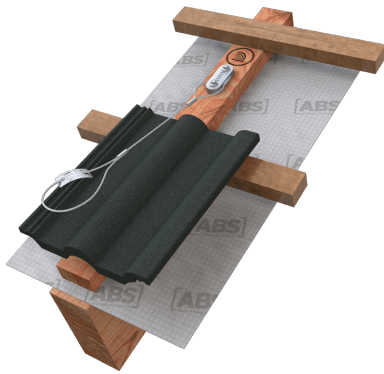

ABS Roofer Kit

PPE set for roofers, incl. safety harness, guided type fall arrest, tape sling and protective bag

