


# Xprinter®

Thermal Transfer / Direct Thermal


## XP-TT426B

- Equipped dual motor
- Print speed up to 127mm/s
- Ribbon roll capacity 300m,  
25.4mm Ribbon Roller (Outer roll ribbon)
- Supporting TSPL-EZ printer language,  
Eltron and Zebra commands
- Large visual windows

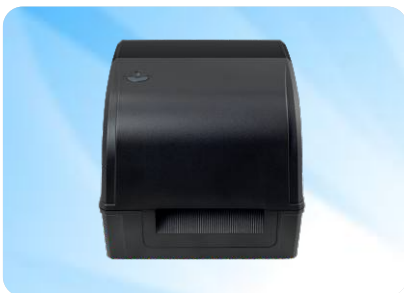

# XP-TT426B

Thermal Transfer/ Direct Thermal



|                                   |                                                                                                                                                                                               |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                      | <b>XP-TT426B</b>                                                                                                                                                                              |
| <b>Resolution</b>                 | 203 DPI                                                                                                                                                                                       |
| <b>Print method</b>               | Thermal Transfer / Direct Thermal                                                                                                                                                             |
| <b>Print speed</b>                | 127 mm (5") / s Max.                                                                                                                                                                          |
| <b>Max.print width</b>            | 108 mm (4.25")                                                                                                                                                                                |
| <b>Max.print length</b>           | 1778 mm (70")                                                                                                                                                                                 |
| <b>Media</b>                      |                                                                                                                                                                                               |
| <b>Media type</b>                 | Continuous, gap, black mark, fan-fold and punched hole                                                                                                                                        |
| <b>Media width</b>                | 25.4-118mm (1.0"-4.6")                                                                                                                                                                        |
| <b>Media thickness</b>            | 0.06~0.254 mm (2.36~10mil)                                                                                                                                                                    |
| <b>Media core diameter</b>        | 25.4 ~ 76.2 mm (1 " ~ 3 ")                                                                                                                                                                    |
| <b>Label length</b>               | 10 - 1778 mm(0.39" ~ 70" )                                                                                                                                                                    |
| <b>Label roll capacity</b>        | 127 mm (5") OD (External Diameter)                                                                                                                                                            |
| <b>Ribbon capacity</b>            | Max.300m                                                                                                                                                                                      |
| <b>Ribbon width</b>               | 110 mm                                                                                                                                                                                        |
| <b>Ribbon core inner diameter</b> | 25.4 mm (1")                                                                                                                                                                                  |
| <b>Performance Features</b>       |                                                                                                                                                                                               |
| <b>Processor</b>                  | 32-bit CPU                                                                                                                                                                                    |
| <b>Memory</b>                     | 8MB Flash Memory/ 8MB SDRAM/ Flash memory can be expanded Max.4Gb                                                                                                                             |
| <b>Interface</b>                  | Standard version: USB      Optional:Serial/Lan/WIFI/Bluetooth/TF card                                                                                                                         |
| <b>Sensors</b>                    | ① Gap sensor    ② Cover opening sensor    ③ Black mark sensor    ④ Ribbon sensor                                                                                                              |
| <b>Fonts/Graphics/Symbologies</b> |                                                                                                                                                                                               |
| <b>Internal fonts</b>             | 8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.                                                                                                                   |
| <b>1D barcode</b>                 | Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST |
| <b>2D barcode</b>                 | PDF-417, Maxicode, DataMatrix, QR code, Aztec                                                                                                                                                 |
| <b>Rotation</b>                   | 0°, 90°, 180°, 270°                                                                                                                                                                           |
| <b>Emulation</b>                  | TSPL, EPL, ZPL, DPL                                                                                                                                                                           |
| <b>Physical Features</b>          |                                                                                                                                                                                               |
| <b>Dimension</b>                  | 299 mm (D) x 235 mm (W) x 198.3 mm (H)                                                                                                                                                        |
| <b>Weight</b>                     | 2.55 kg                                                                                                                                                                                       |
| <b>Reliability</b>                |                                                                                                                                                                                               |
| <b>Print head life</b>            | 30 km                                                                                                                                                                                         |
| <b>Software</b>                   |                                                                                                                                                                                               |
| <b>Driver</b>                     | Windows / Linux / Mac                                                                                                                                                                         |
| <b>SDK</b>                        | Windows / iOS / Android                                                                                                                                                                       |
| <b>Power supply</b>               |                                                                                                                                                                                               |
| <b>Input</b>                      | AC 110-240V,1.8A, 50-60Hz                                                                                                                                                                     |
| <b>Output</b>                     | DC 24V, 2.5A, 60W                                                                                                                                                                             |
| <b>Options</b>                    |                                                                                                                                                                                               |
| <b>Factory Options</b>            | ① Built-in Ethernet server (10/100 Mbps);<br>② RS-232C (2400-115200 bps) communication interface;<br>③ Cutter    ④ Peeling machine    ⑤ Bluetooth module    ⑥ WiFi module                     |
| <b>Dealer Options</b>             | ① External paper roll holder and 1 "paper roll<br>② Extension board for external paper roll holder                                                                                            |
| <b>Environmental Conditions</b>   |                                                                                                                                                                                               |
| <b>Operation</b>                  | 5 ~ 40°C(41~104°F), Humidity: 25 ~ 85% non-condensing                                                                                                                                         |
| <b>Storage environment</b>        | -40 ~ 60°C(-40~140°F), Humidity:10 ~ 90% non-condensing                                                                                                                                       |



Scan QR code to checkout Xprinter website for more update information.  
Phone: (+86 756) 3895 852  
Http://www.xprintertech.com  
Email: overseas@xprinter.net

