

X-Poster

Basic poster screen



Hardware parameters

Model: X181P-80 / X251P-80

Module size: 320mm*160mm

Display size: 640mm*1920mm(80inch)

Machine size: 656mm*2009mm*40mm

Weight: 33.7Kg (screen) + 14.2Kg (mobile base)

Pixel pitch: 1.86mm/2.5mm



API introduction

The screen comes with a multi-functional interface

USB 2.0

LAN

WiFi

COM



Power switch

Power outlet

CLED


Picture delicate

HD resolution: 344*1032, 256*768

Free brightness: support 0~600 cd/m² free
adjustment (P1.8 only to 550 cd/m²)



COLED

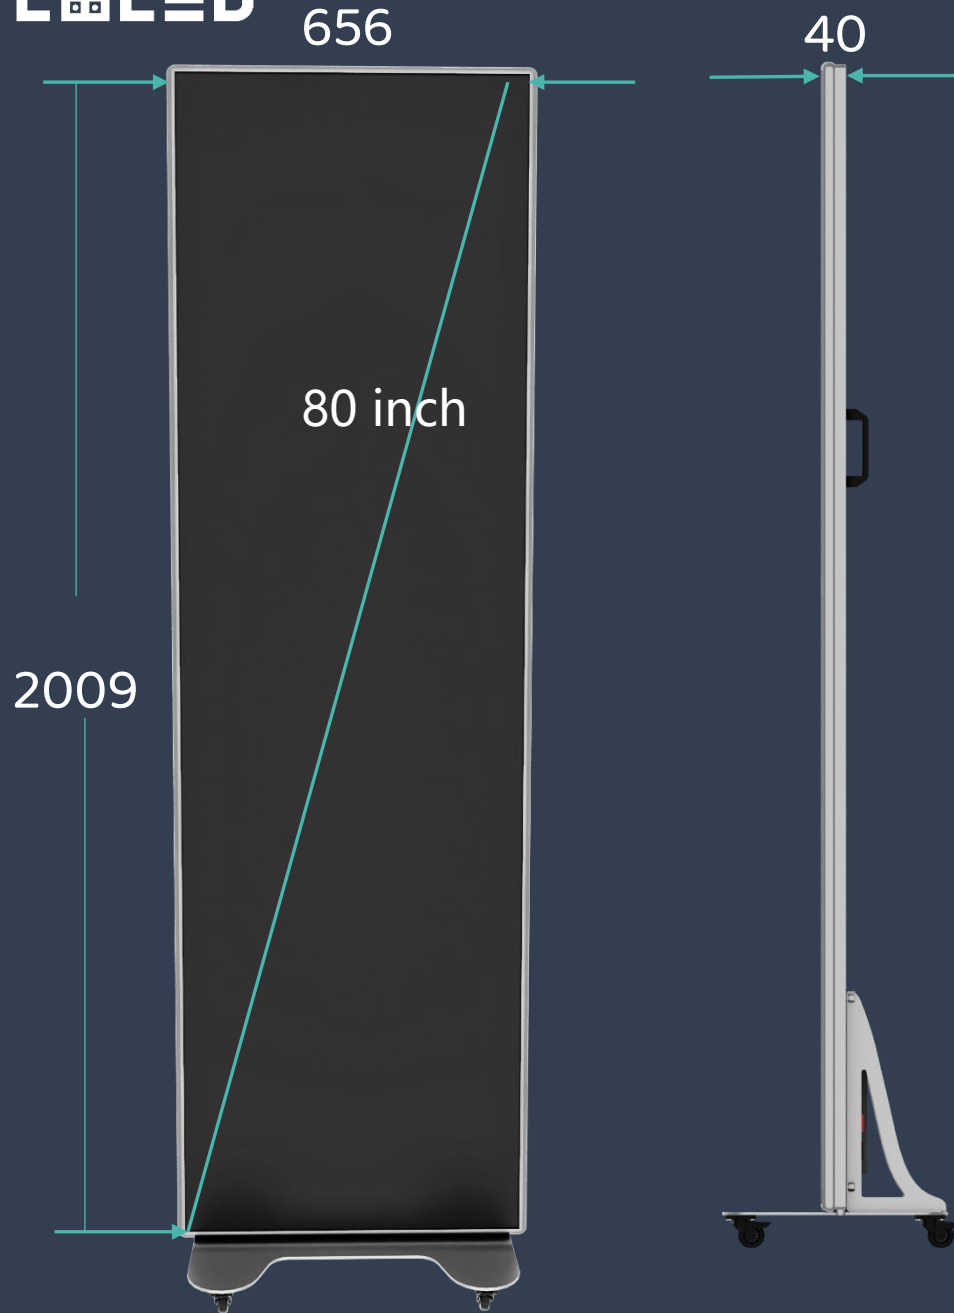

Screen specifications

The screen body is 80 inches, standardized style

The thickness is 40mm, which is suitable for a variety of scenes

Air intake at the bottom and heat dissipation at the top to improve heat dissipation efficiency

Handles are installed to make it easier to transport

Eight Design Highlights:

The back cover is opened by hand, and it is tool-free maintenance

Standard base mounting, more convenient to move




Eight Design Highlights:

The whole machine is light and thin, simple and beautiful

Comes with flip bezel, seamless screen splicing (optional)

The rounded frame makes it more comfortable to hold

The streamlined triangular bracket is beautiful and the screen body is more stable

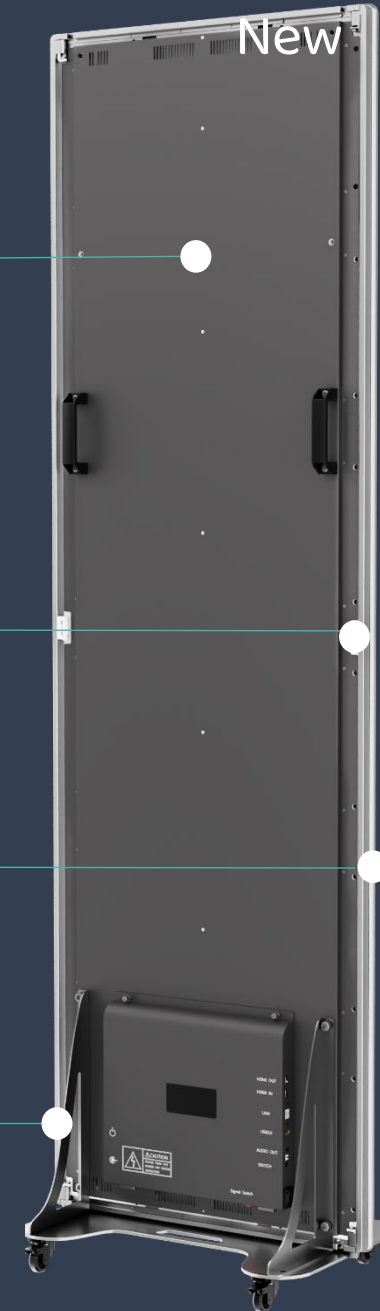


Module is magnetically
mounted

Cable connection, stable and reliable






USB flash drive playback

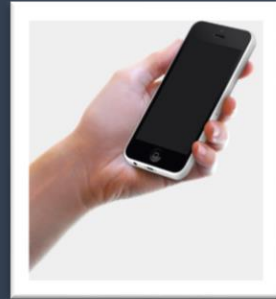


Mobile APP controls playback

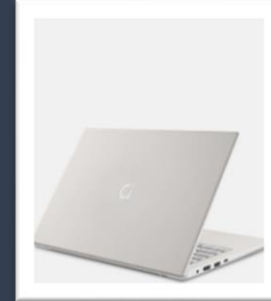

Wifi LAN playback



LAN playback with a
network cable

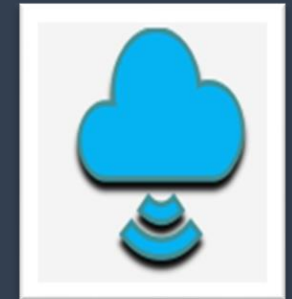

Cluster cloud playback

Control mode


Support a variety of playback methods to adapt to more scenarios

Cluster management and control

Auditing and playback control can be managed remotely and centrally



Intelligent cloud playback architecture

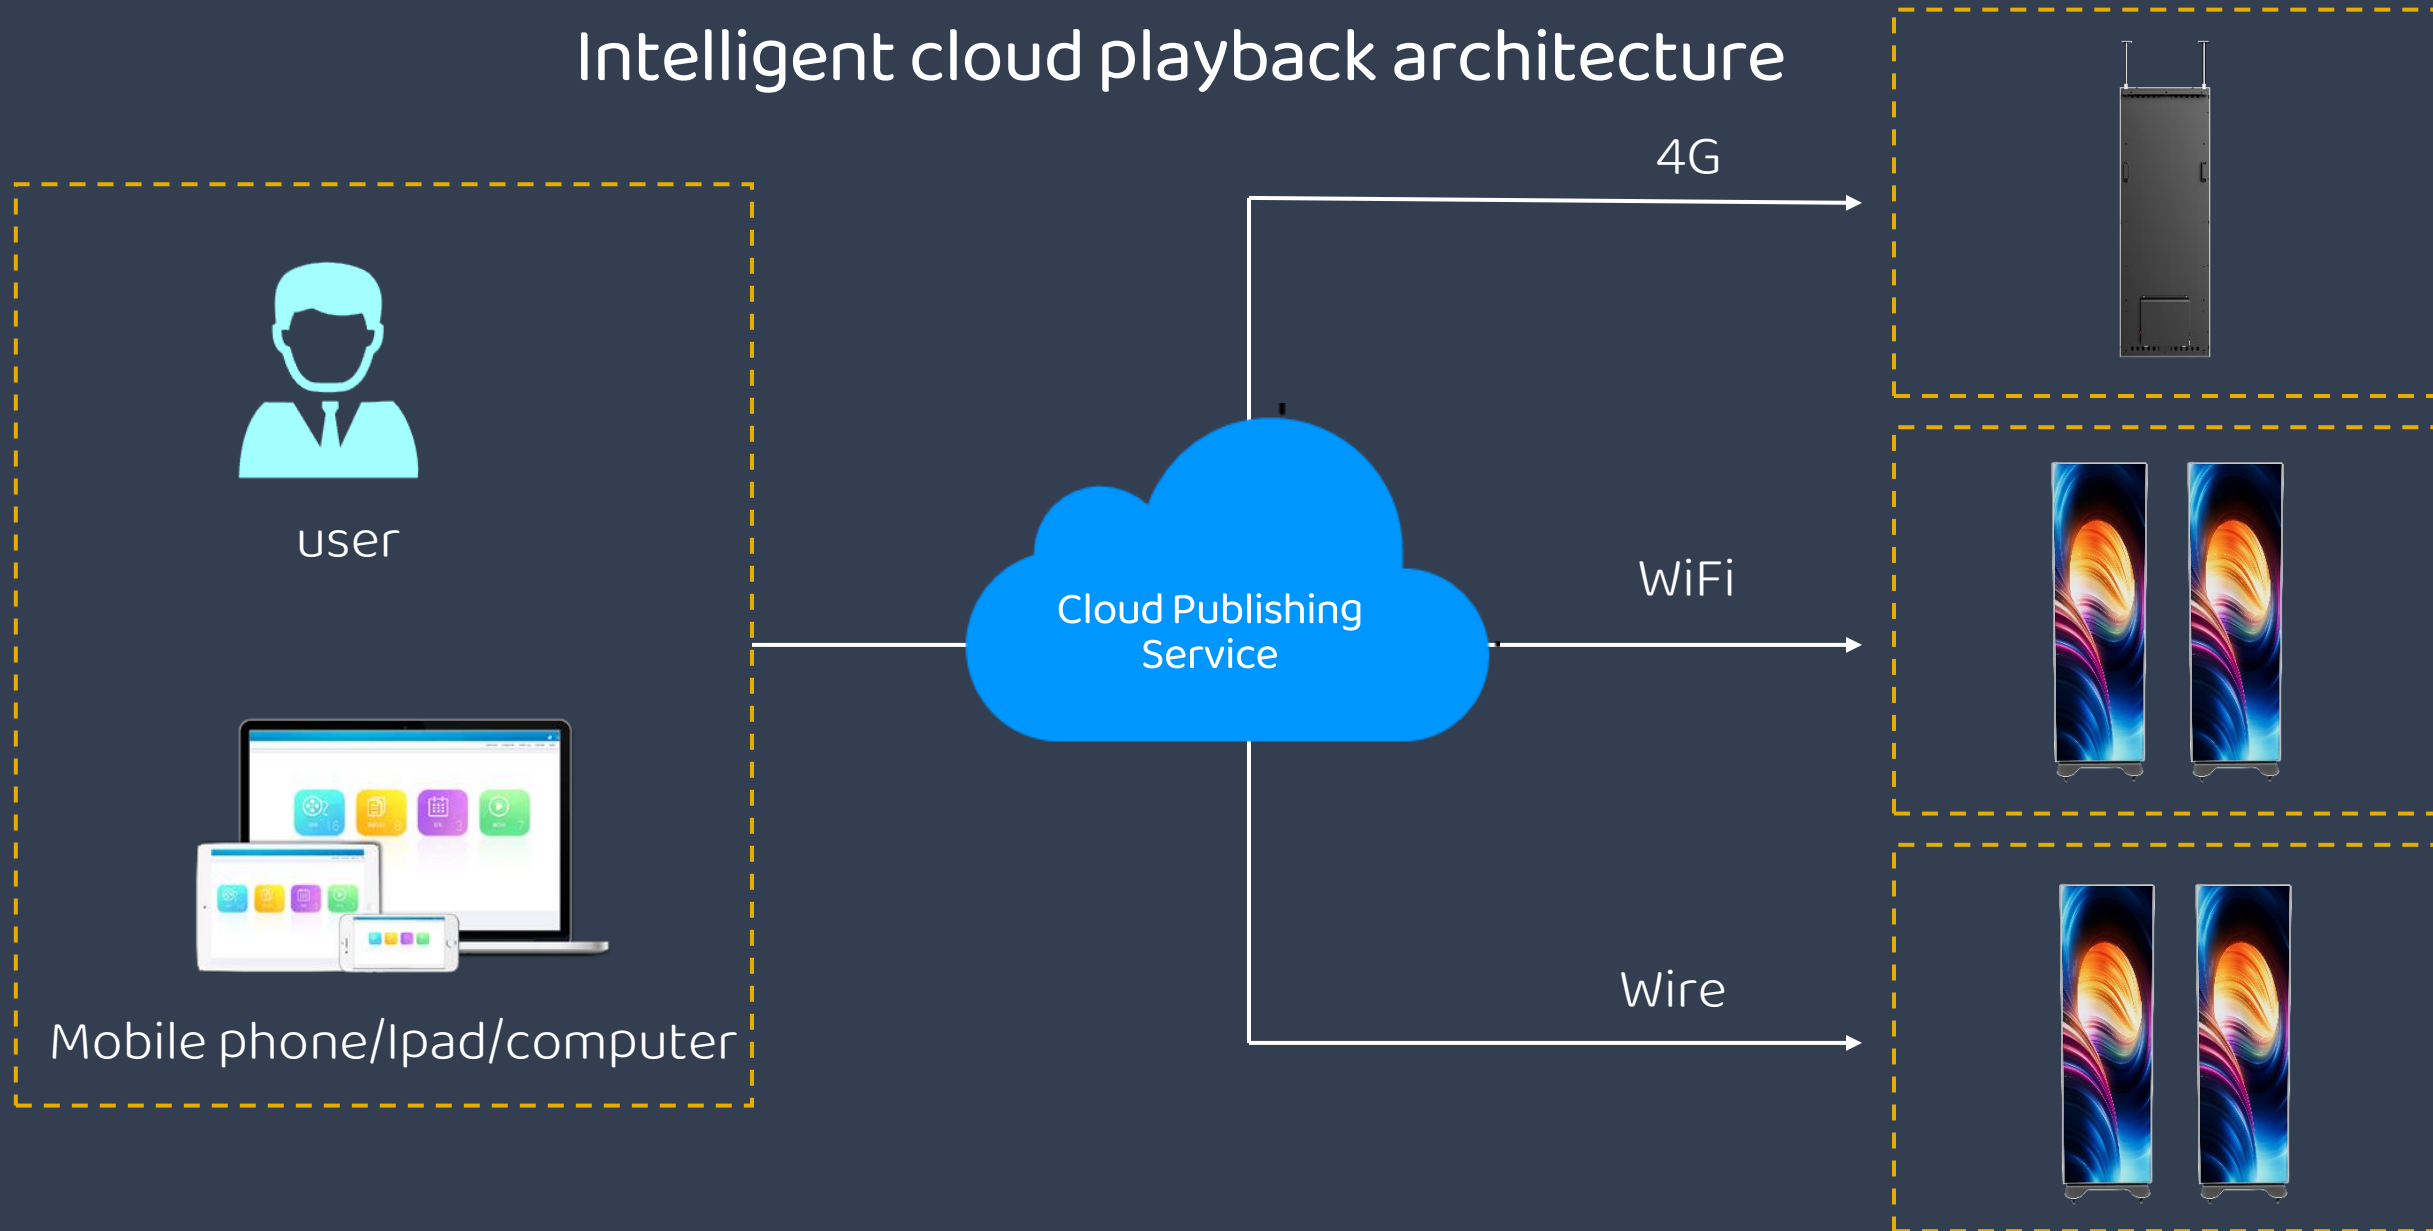

Floor-mounted (standard)

Stand-up mobile base, easy to move and safer




Hoisting (optional)

Optional hoisting pendant to use hoisting scene




Wall mounting (optional)

It supports wall-mounted installation, and is thin and picturesque against the wall


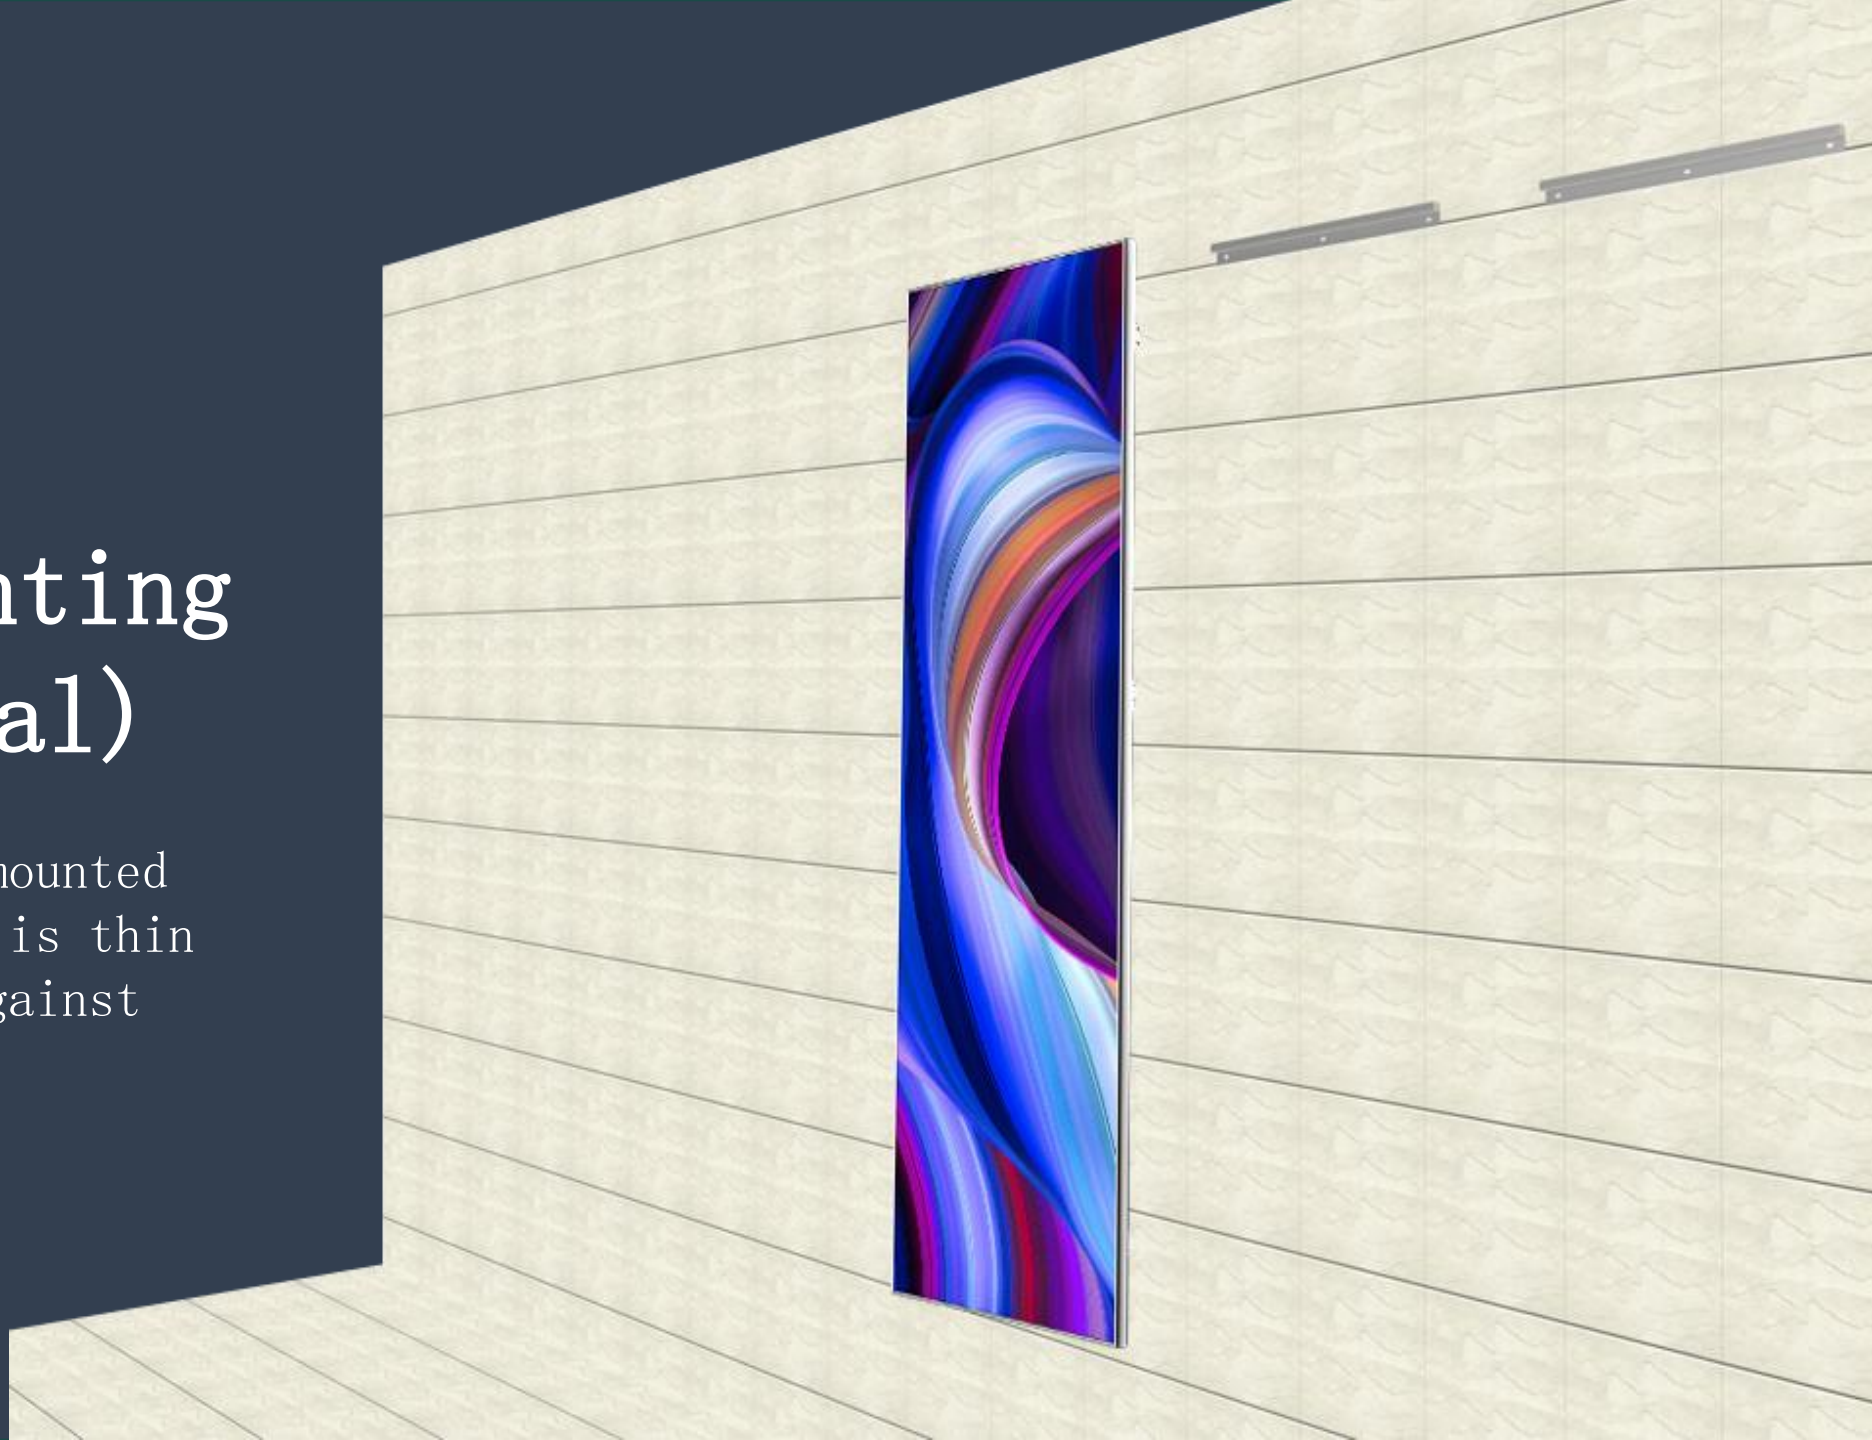


6 splicing units (optional)

Support 6 cascades, replace the
control card

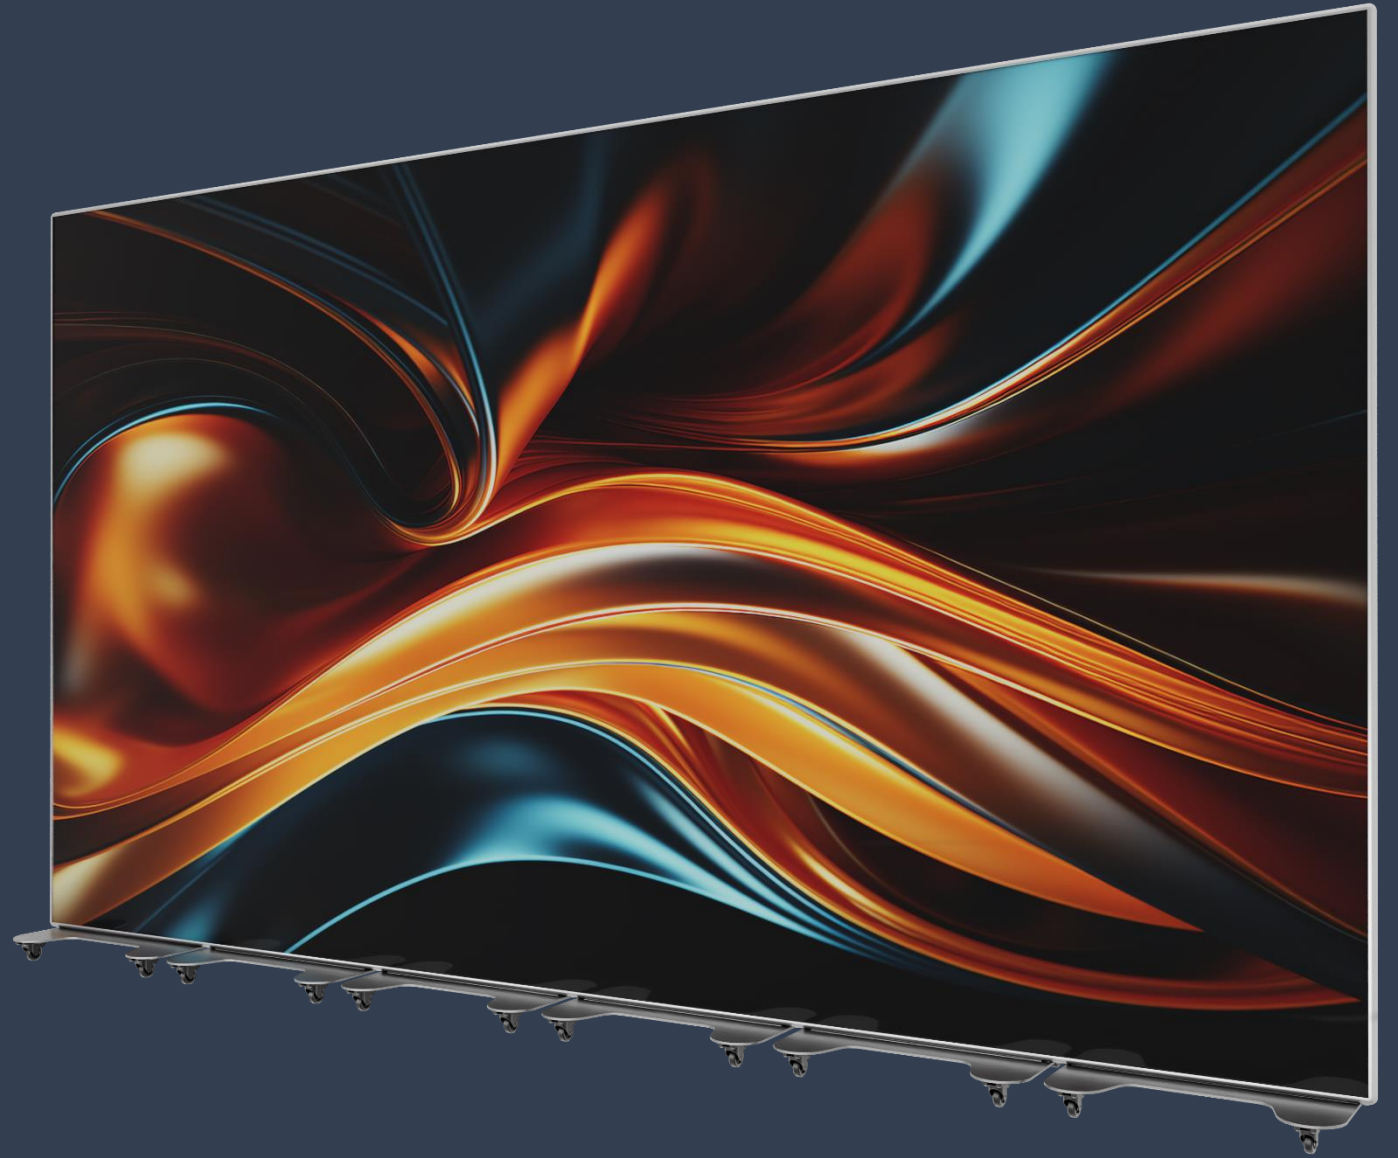

COLED

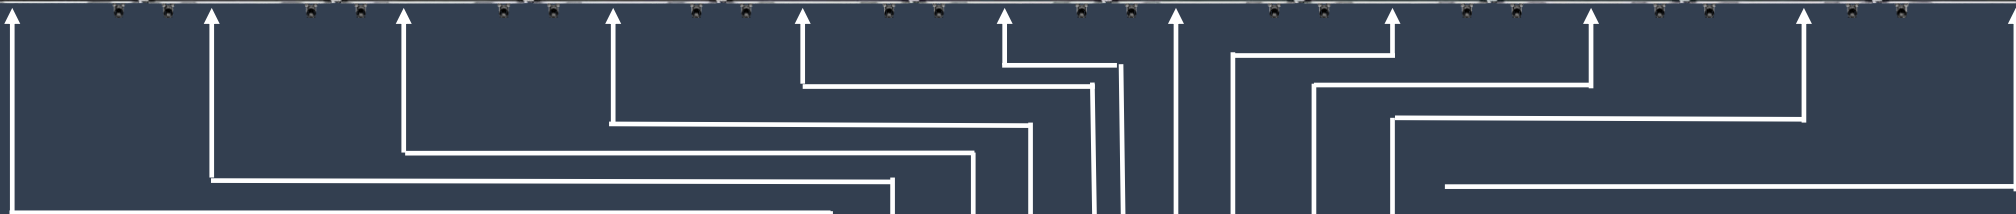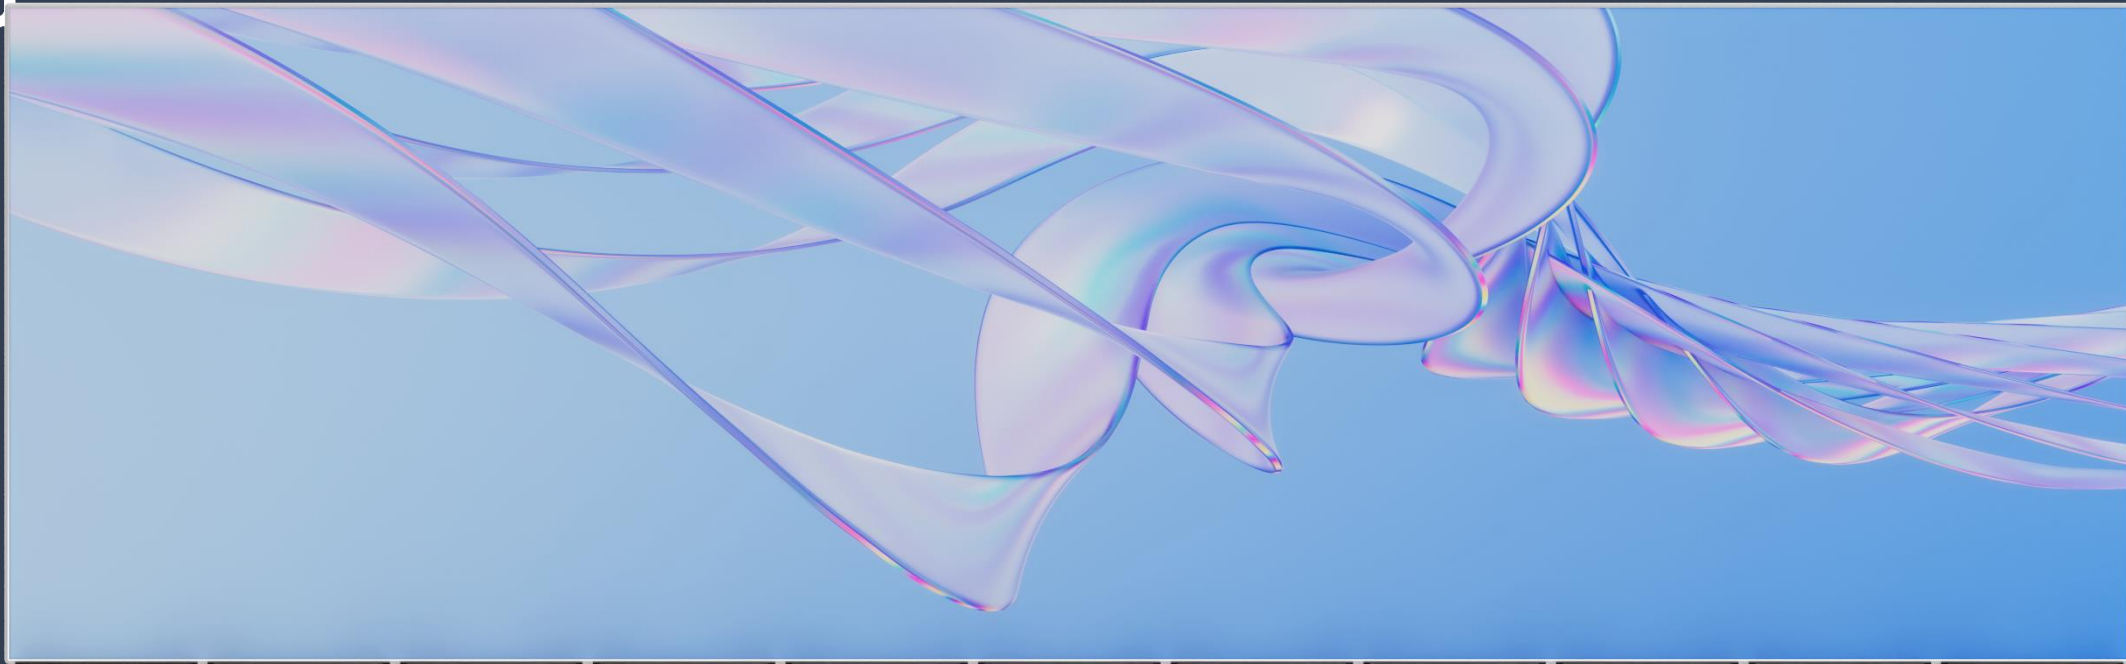

Level networking port

Multiple splicing (optional)



It supports more than 6 cascades, increases the level of networking ports, and uses the level of networking ports to realize the splicing of multiple screens



Specifications of the basic version of the poster screen

certification : 3C、CE (Pending)

Product model	X181P-80	X251P-80
Point spacing	1.8	2.5
brightness	0-550cd/m ²	0-600cd/m ²
power consumption	465W/max/155W/average	425W/max/140W/average
Display dimensions	640*1920mm	
The size of the whole machine	656*2009mm	
operating system	Android	
contrast	4000： 1	
Grayscale scale	14bit	
Refresh rate	3840Hz	
visual angle	160°/140°	
interface	USB 2.0、 LAN	
Response time	≤0.5ms (Typ)	
weight	33.7kg (Machine) +14.2 (base)	
Operating temperature and humidity	-10°C-40°C, 10% ~ 65%RH	
Store at temperature and humidity	-20°C-50°C, 10%~65%RH	

The design and specifications will be updated from time to time and are subject to change without notice