

Technical Data Sheet


CODE 11133

MF 150/6" LL

Wall axial fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,15	Weight (Kg)	0,98
Absorbed Power max (W)	28	Delivery max (l/s)	93
Frequency (Hz)	50	Delivery max (m³/h)	335
Insulation Class	II°	Pressure max (mmH2O)	6
IP	X4	Pressure max (Pa)	59
Max ambient temperature for continuous operation (°C)	50	RPM	2100
Voltage (V)	230-240	Sound Pressure level Lp [dB (A)] 3m	40,1

DIMENSIONS

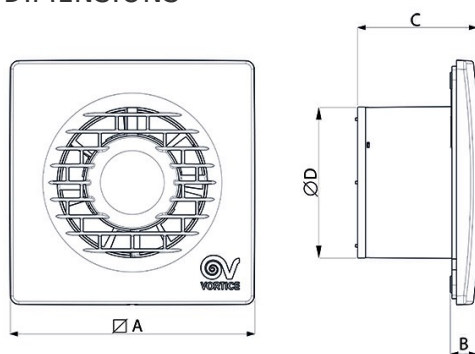

Etichetta Energetica	NO
Size A (mm)	214
Size B (mm)	17
Size C (mm)	96
Size D (mm)	156

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11133

MF 150/6" LL

Wall axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m³/h.
- Non-return damper fitted to outlet port.
- IMQ SAFETY and IMQ PERFORMANCE certifications.
- Vortice speed controller.

ACCESSORIES




C 1.5
(COMANDO EL.
1.5 A)
Code 12966



KIT SCB
(TRASF.E.C.)
Code 22481



GFI 12/15
(GRIGLIA FISSA)
Code 22020



SF 150
Code 22164

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com