




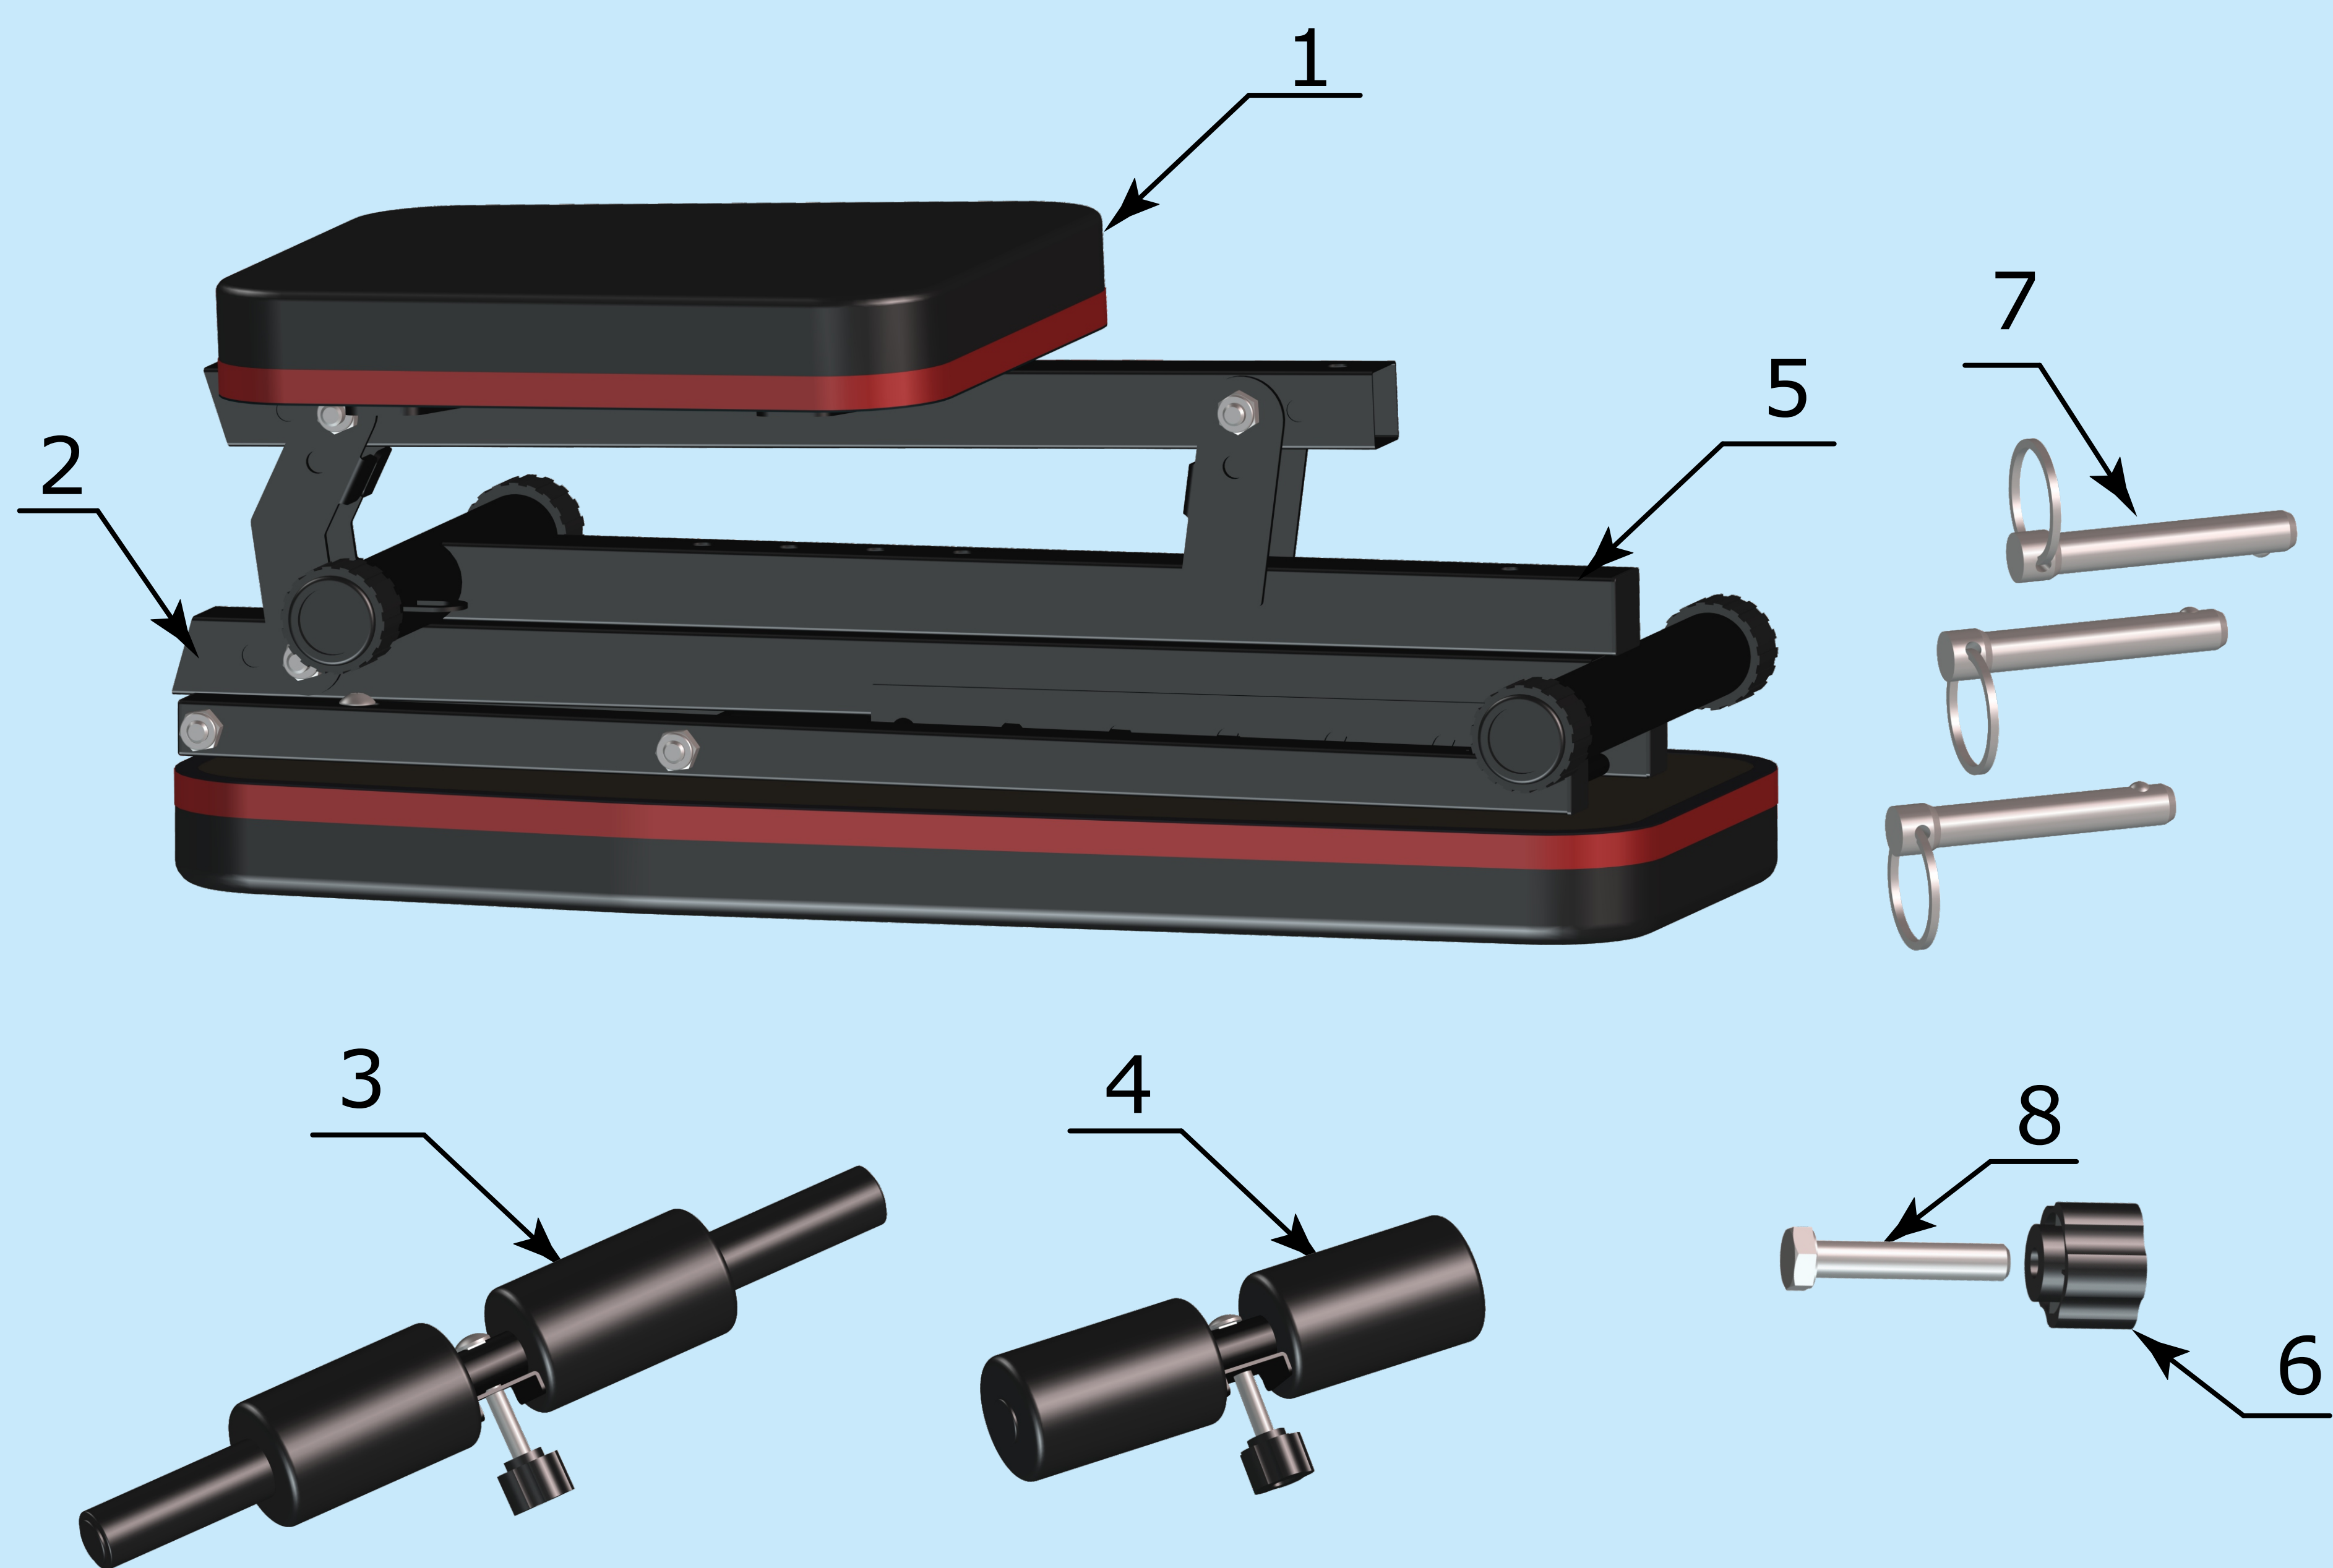

- 1、 The panel
- 2、 Main frame
- 3、 Long Non-slip foam
- 4、 short Non-slip foam
- 5、 T-frame
- 6、 Plum nut
- 7、 Ring pin
- 8、 Hex bolt

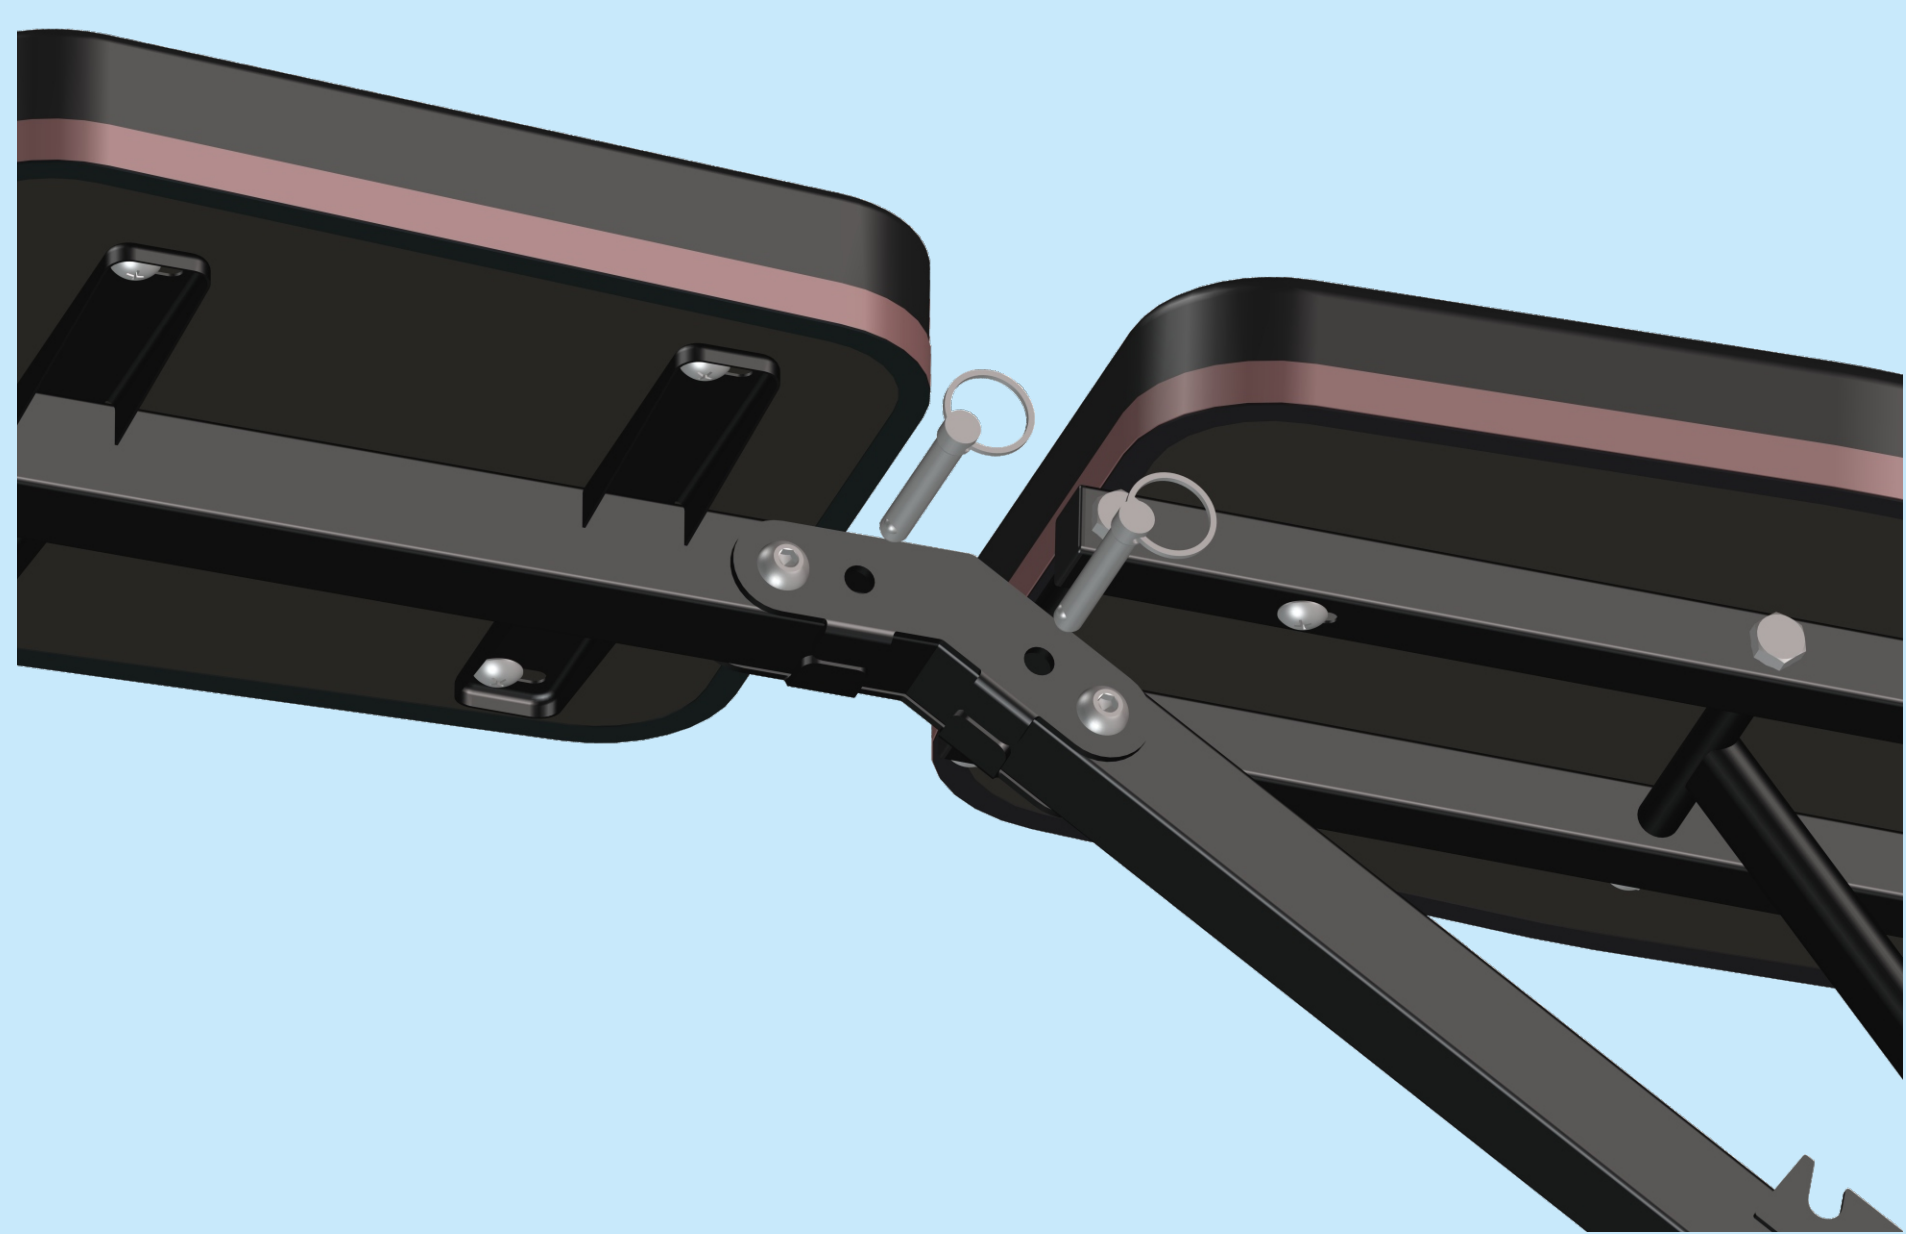


A、 Open the panel, and position with two ring pins(7).

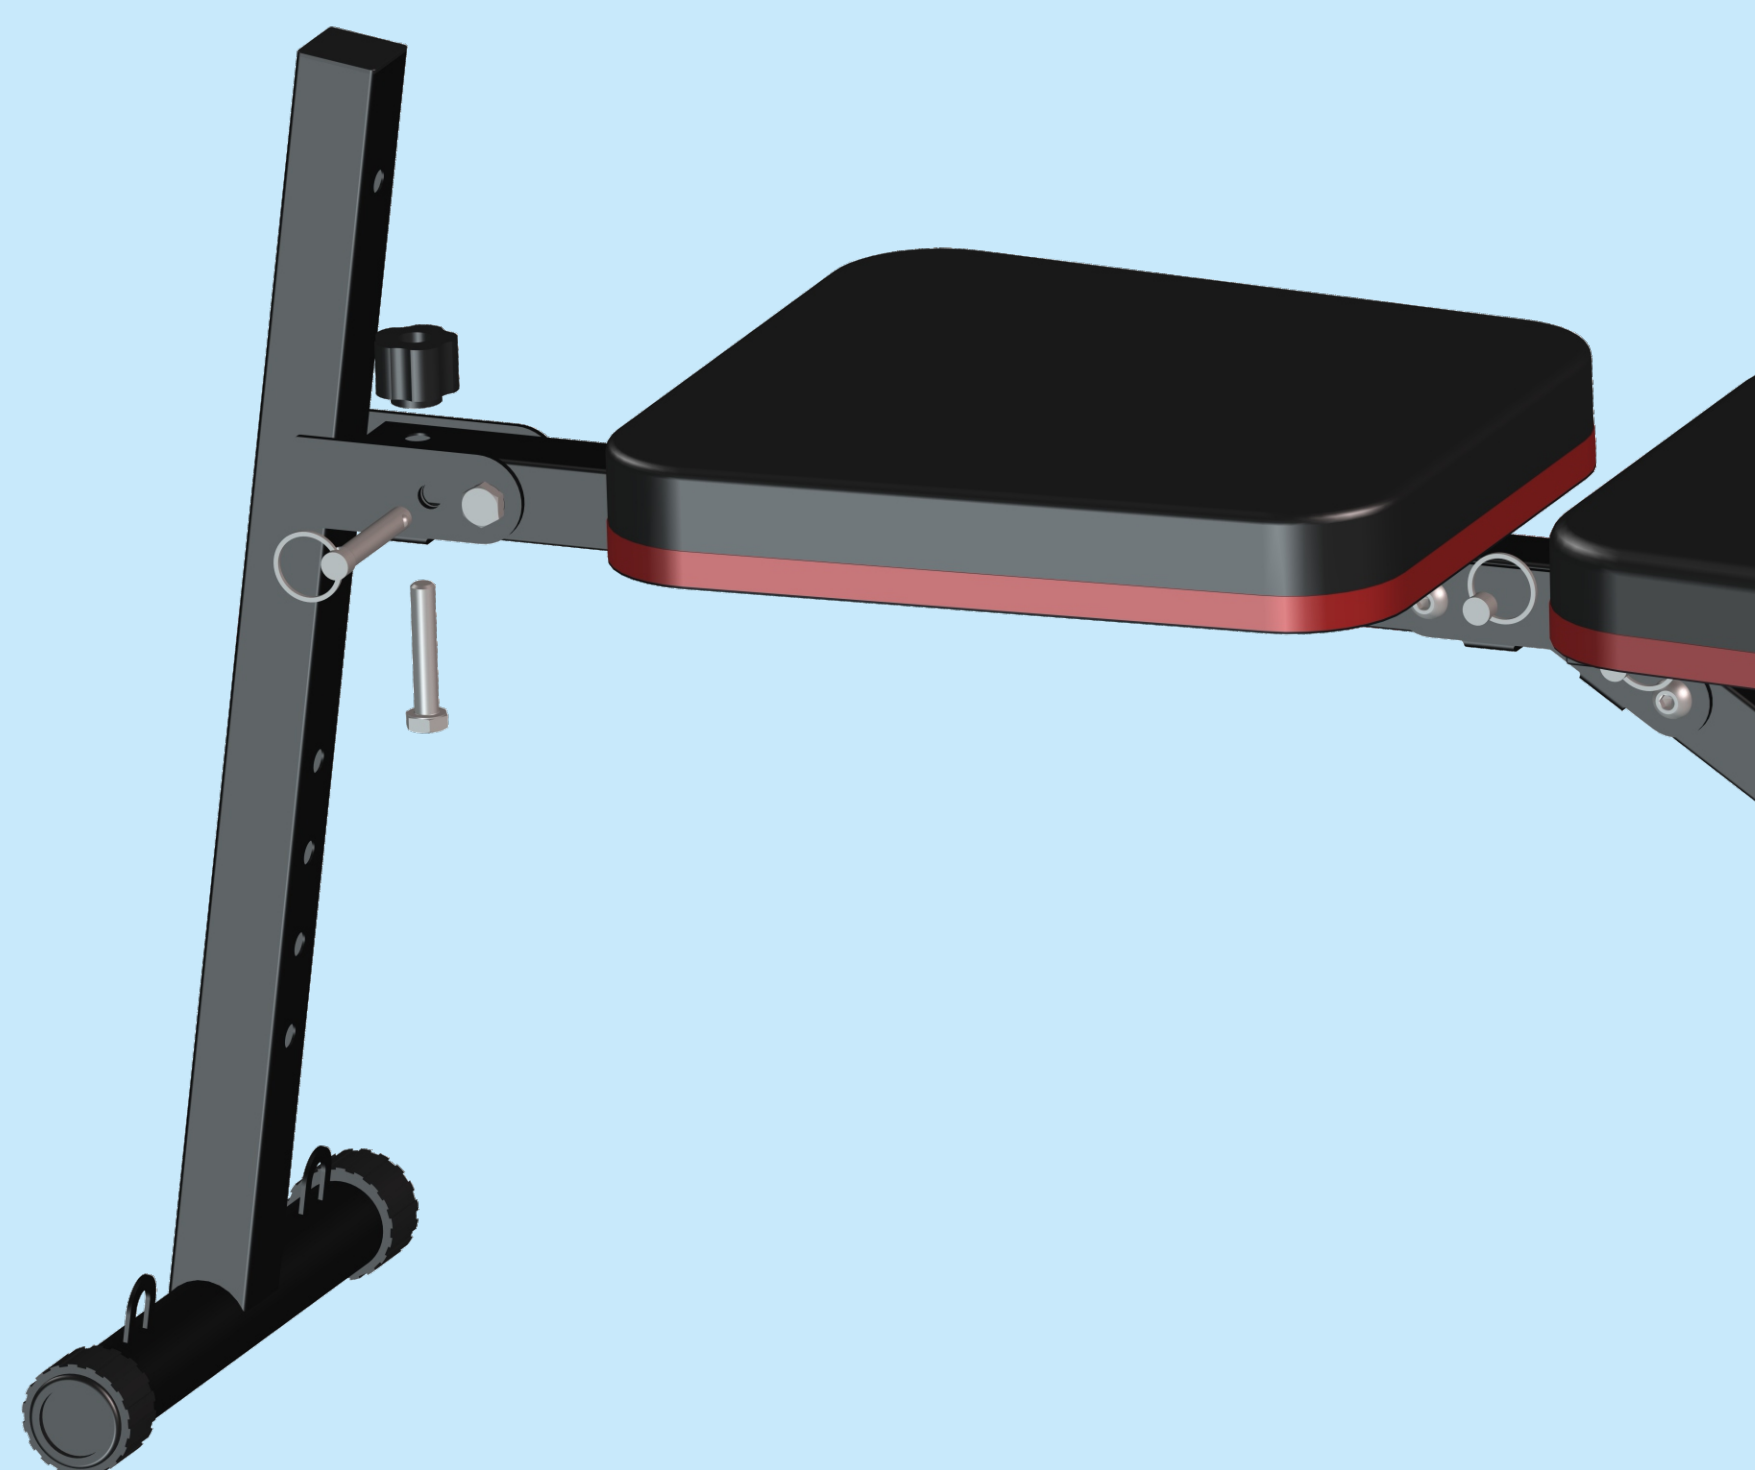

B、 Open the T-frame, and secure it with a ring pin(7) and hex bolt and plum nut.



C、 Fix the short Non-slip foam with carriage screws and plum nut.

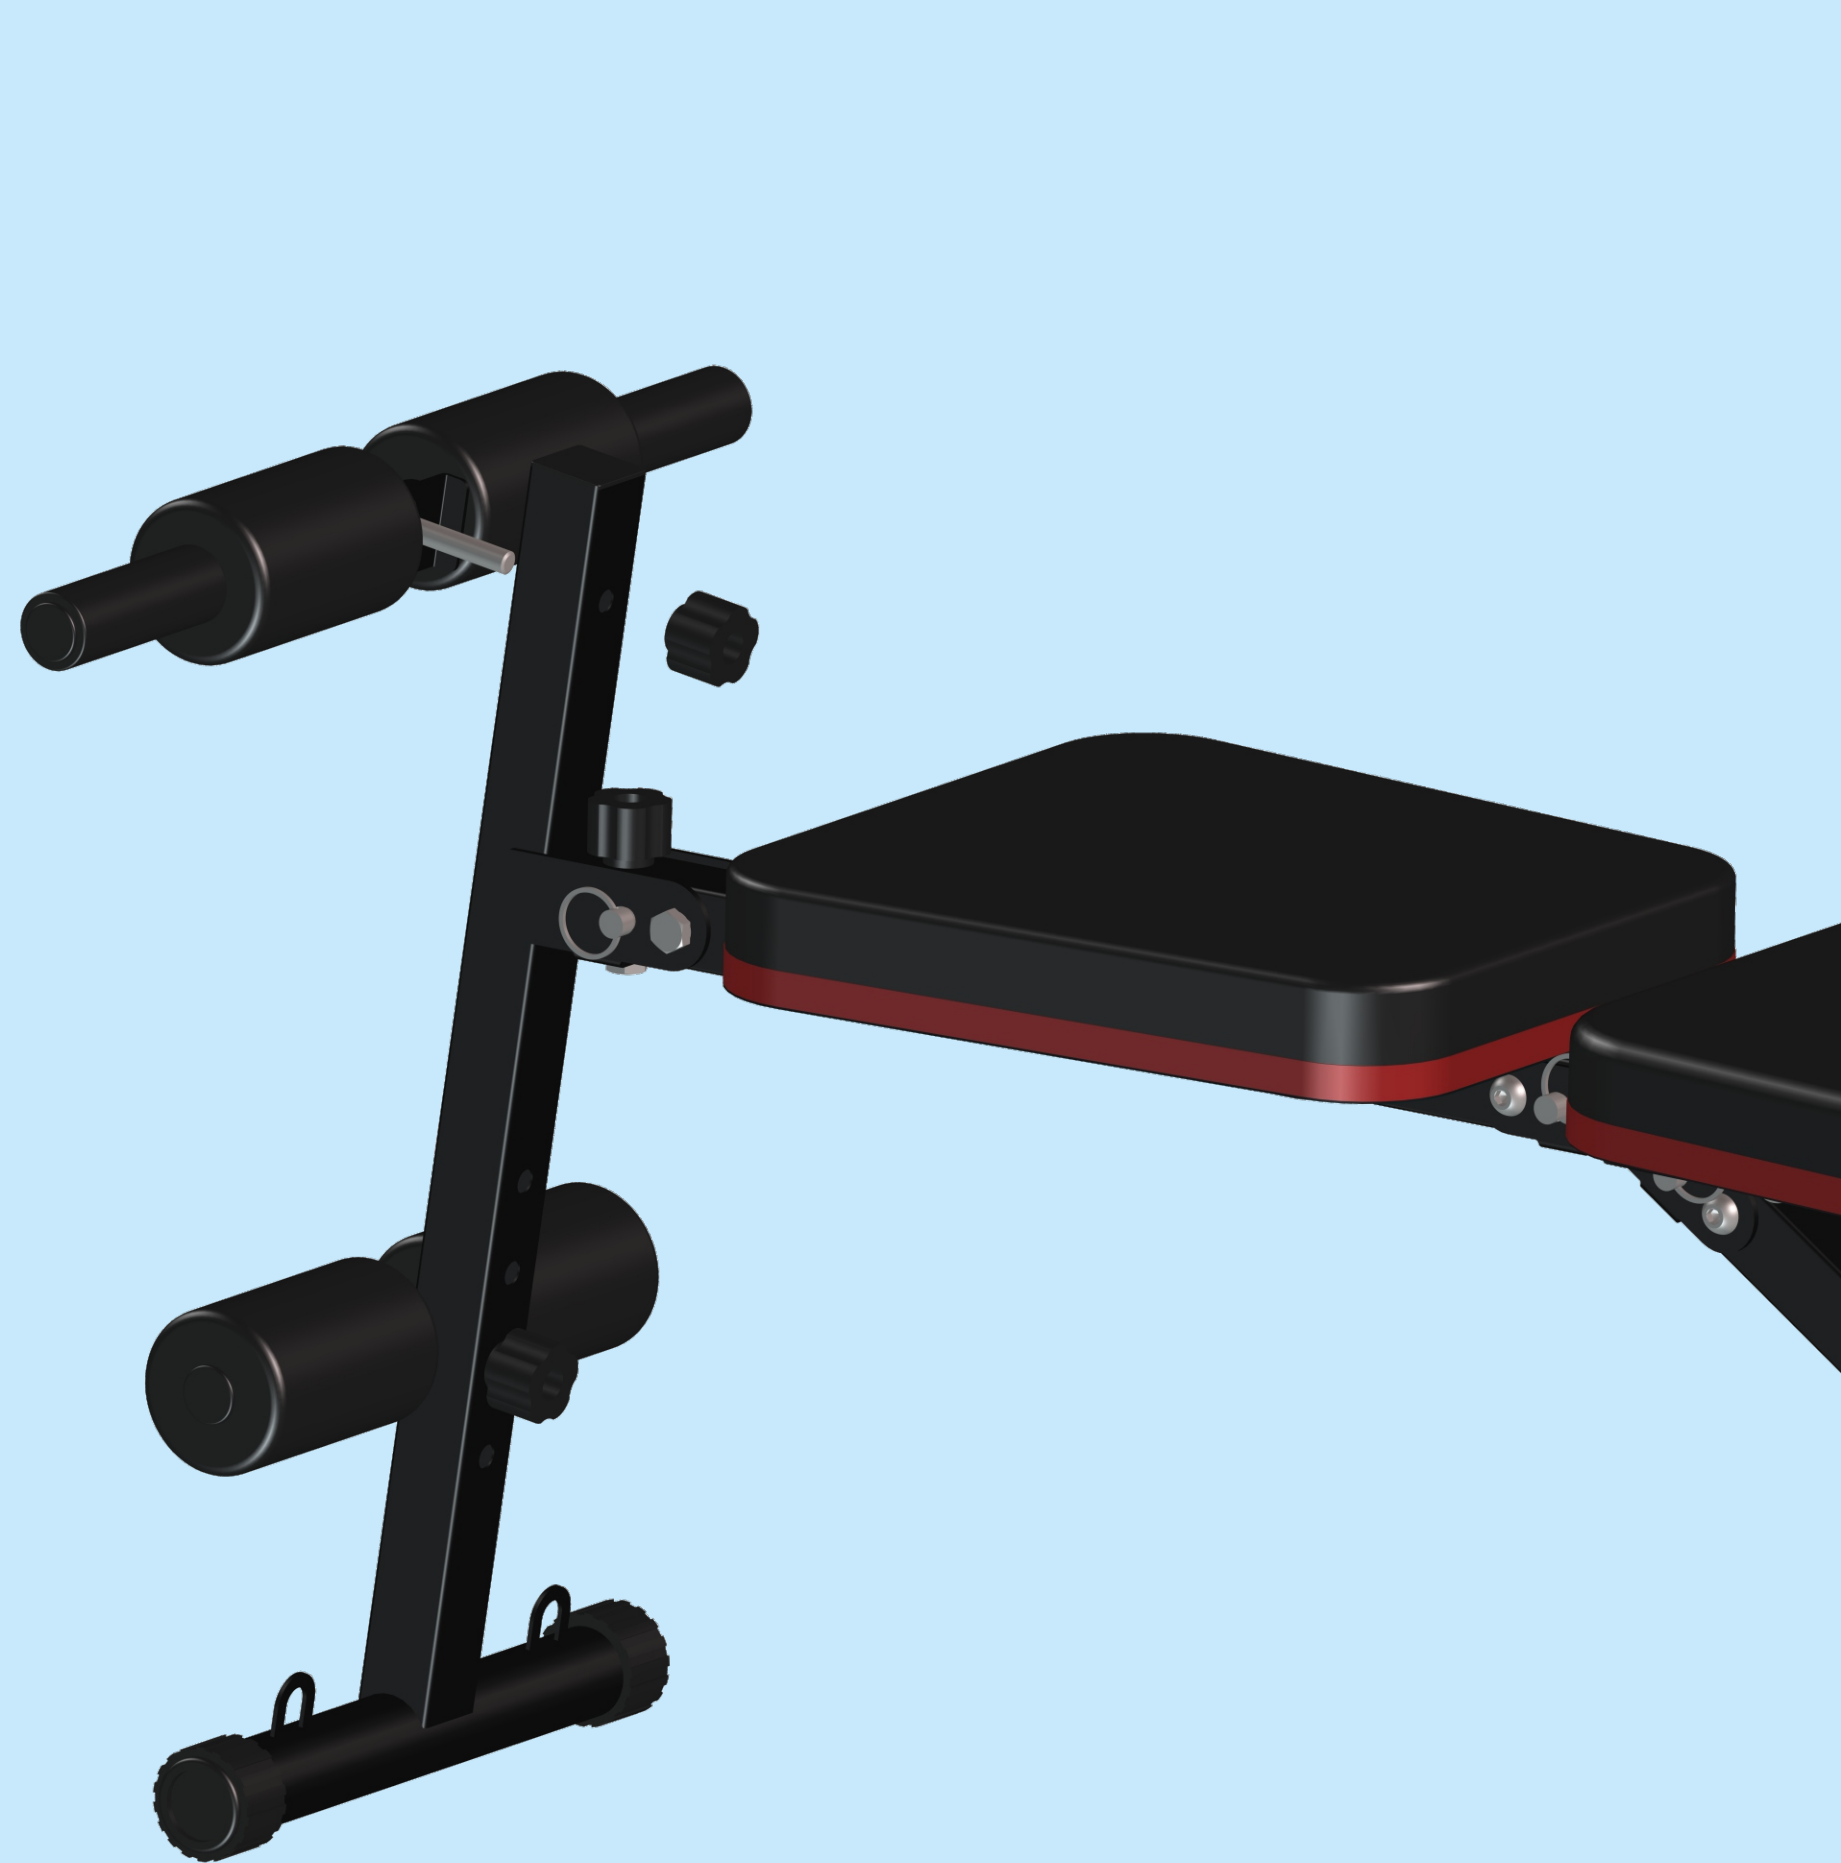

D、 Fix the long Non-slip foam with carriage screws and plum nut.

