





Fuel your productivity



Dell Pro Dock

WD25

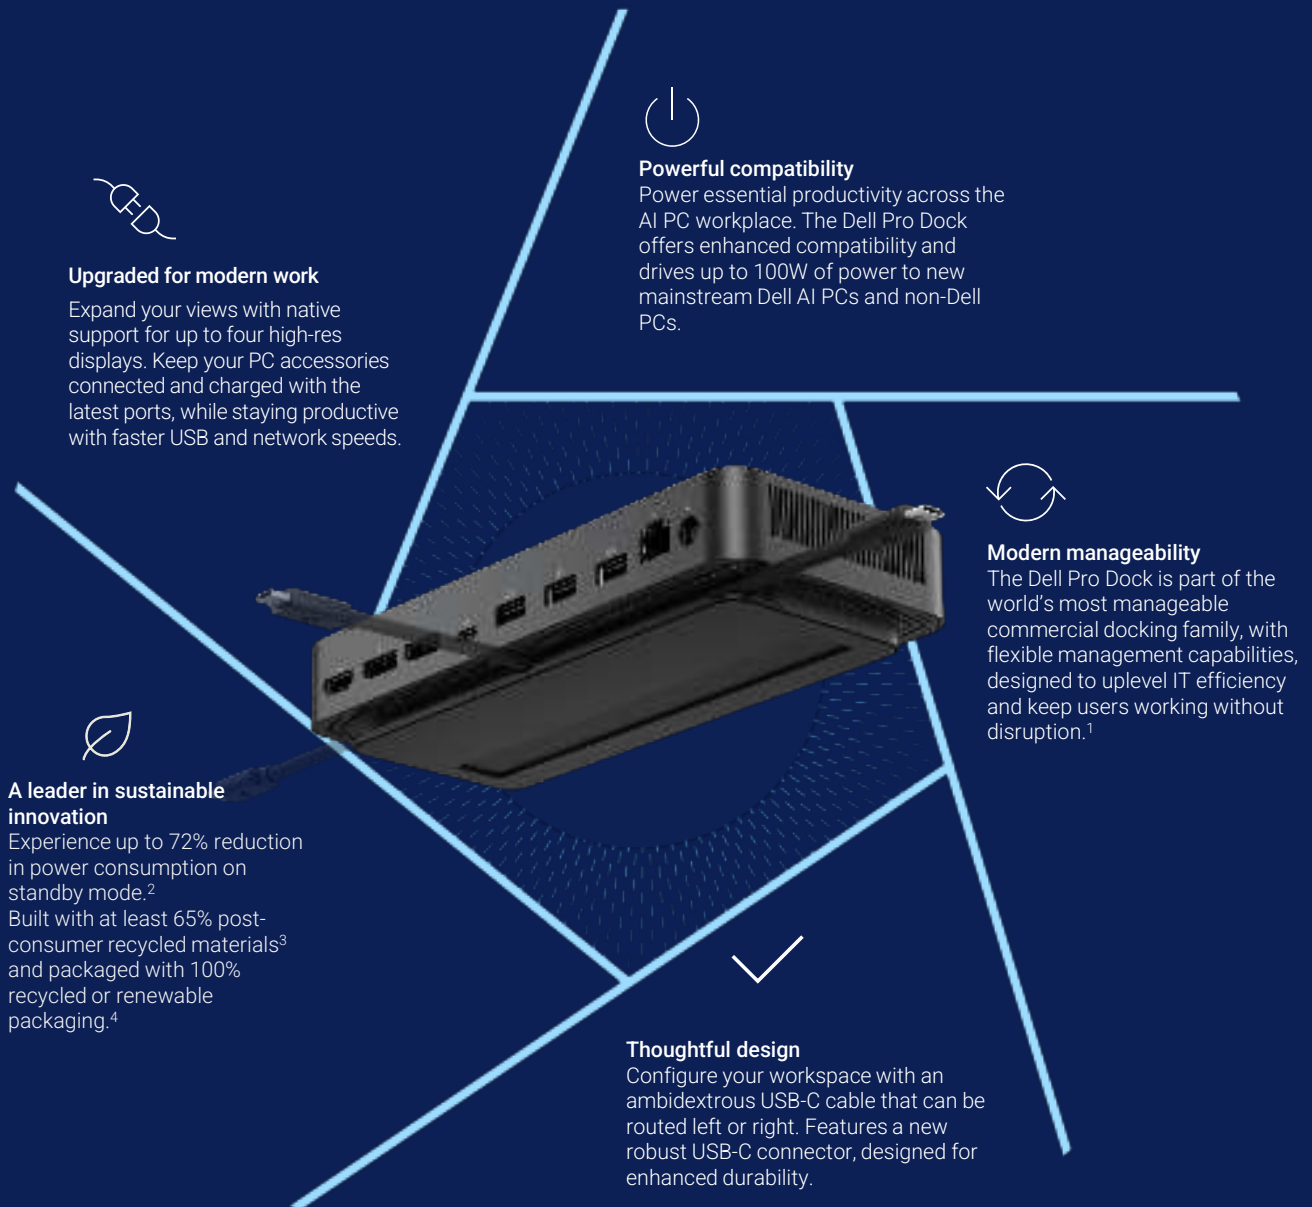



Elevate IT efficiency

Simplify PC workspace modernization at scale

Unified IT experience

Centralize management through a single cloud-based console. When connected to a PC, the Dell Pro Dock, and other Dell peripherals, offer streamlined manageability from the Dell Device Management Console.²

Simplify firmware updates

Reduce IT complexity by deploying a single firmware file across PC workspaces. Minimize end-user disruption with silent firmware updates that are executed upon dock disconnection.

Enhance compatibility

Dell Pro Docks provide more universally compatible features, such as MAC Address Pass-Through and Power Button Sync, for a better docking experience across brands.

[Learn more and start using the Dell Device Management Console](#)

¹ Based on Dell internal analysis – December 2024

² Based on Dell internal analysis – November 2024



Designed for sustainability

The new generation of Dell Pro Docks reflect a commitment to sustainable design innovation to reduce their environmental impact



Sustainably crafted

Designed with up to **65%** post-consumer recycled (PCR) plastic, with 2 types of recycled materials in the chassis and bumpers¹



Eco-conscious packaging


Dell Pro Docks are packaged with **100%** recycled or renewable packaging²



Energy conservation

Experience up to **72%** reduction in power consumption on standby mode³

Ports & Slots

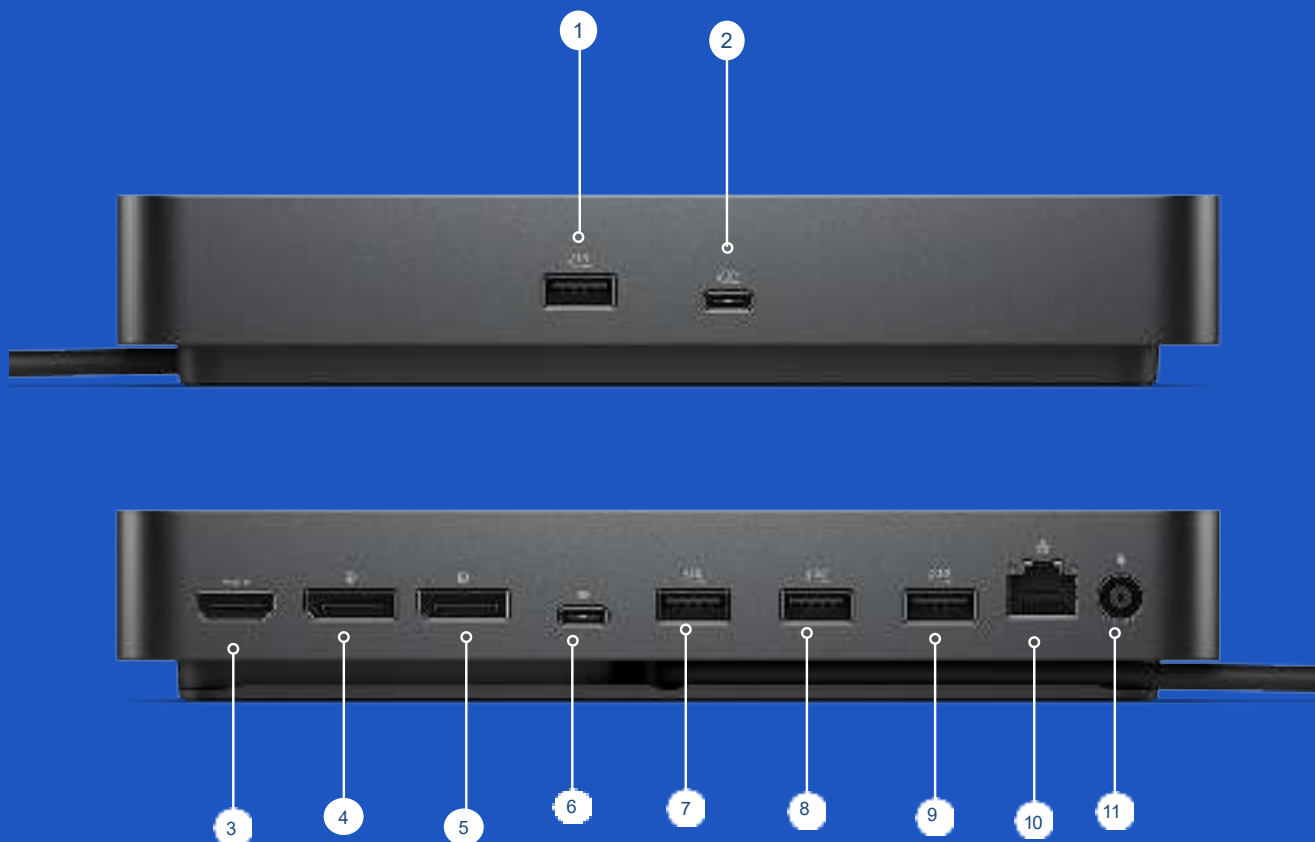

1 USB-A 3.2 Gen 2 with PowerShare

2 USB-C 3.2 Gen 2

3 HDMI 2.1

4 DisplayPort 1.4

5 DisplayPort 1.4

6 USB-C 3.2 Gen 2 Multi-function
DisplayPort 1.4

7 USB-A 3.2 Gen 2 with PowerShare

8 USB-A 3.2 Gen 2 with PowerShare

9 USB-A 3.2 Gen 2 with PowerShare

10 2.5 Gigabit Ethernet (RJ45)

11 Power In

FEATURE	TECHNICAL SPECIFICATION
MODEL	Dell Pro Dock WD25
DOCKING INTERFACE	USB Type-C with DP Alt Mode Connector
POWER	Power Adapter 130 Watt AC with up to 100 Watt power delivery to Dell Commercial Notebooks Up to 96 Watts power delivery to non-Dell systems
DISPLAY SUPPORT	<u>DP1.4 without Display Stream Compression</u> Up to: 4 x SXGA(1280x1024)@60Hz 3 x FHD(1920x1080)@60Hz 2 x QHD(2560x1440)@60Hz 1 x 4K(3840 x 2160)@60Hz <u>DP1.4 / DP2.1 with Display Stream Compression</u> Up to: 4 x WQHD(3440 x 1440) @60Hz 3 x WQHD(3440 x 1440) @60Hz 2 x 5K (5120 x 2160) @60Hz 1 x 6K (6144 x 3456) @60Hz
VIDEO INTERFACES	2 x DP1.4 1 x HDMI 2.1 1 x USB-C 3.2 Gen 2 Multi-function DisplayPort 1.4
USB PORTS (DATA ONLY)	4 x USB-A 3.2 Gen 2 (10 Gbps) 1 x USB-C 3.2 Gen 2 (10 Gbps)
USB PORTS (POWER)	4 x USB-A 3.2 Gen 2 (4.5W each) 1 x USB-C 3.2 Gen 2 (15W) 1 x USB-C Multi-function DisplayPort (7.5W) All deliver power with or without PC
HOST PC MANAGEMENT	MAC address pass-through PXE Boot Dock Power Button Sync Wake-On-LAN WLAN to LAN switch Kernel Direct Memory Access (DMA) protection
HOST SOFTWARE (WINDOWS)	Dell Firmware Utility Dell Display and Peripheral Manager Dell Command Update
DOCK MANAGEMENT FEATURES	Host PC based firmware update Firmware update on disconnect Port disablement
CLOUD MANAGEMENT (VIA HOST PC SOFTWARE)	Dell Device Management Console enables: • Automatic or scheduled firmware updates • Maintain specific firmware version or downgrade • Peripheral inventory and status
CLOUD MANAGEMENT ENROLLMENT	Dell Display and Peripheral Manager Dell Management Agent

FEATURE	TECHNICAL SPECIFICATION
MODEL	Dell Pro Dock WD25
NETWORKING	2.5 Gigabit Ethernet
LED INDICATORS	Power Button LED RJ45 LEDs
SECURITY SLOT TYPE (CABLE LOCK SOLD SEPARATELY)	1 x Kensington lock slot 1 x Wedge-shaped lock slot
DIMENSIONS	205mm x 90mm x 35.25mm 8.07in x 3.54in x 1.39in
DOCK WEIGHT (WITHOUT POWER ADAPTER)	550 g 1.21 lb
CABLE LENGTH	0.9 m
OPERATING SYSTEMS	Windows 10 Windows 11 Ubuntu 24.04 Red Hat Enterprise Linux 9.6 + ChromeOS 137
WARRANTY	3-Year Limited Hardware Warranty with Advanced Exchange Additional 4- & 5-year warranty optional
WHAT'S IN THE BOX	Docking station Power adapter and power cord Documentation (Quick Start Guide, Safety, Environmental, and Regulatory Information)