

Ideal

for above ground
pools




75%

Energy saving
up to 75%



Environmentally

friendly
refrigerants



Convenient

plug and play



Portable

compact design

Model: NE-F	30SPR4-CP	50SPR4-CP
Performance Condition: Ambient Temperature: (DB/WB) 27°C/24.3°C; Water Inlet/Outlet Temperature: 26°C/28°C.		
Heating Capacity (kW)	3	5
Consumed Power (kW)	0.57	0.806
COP	5.26	6.2
Performance Condition: Ambient Temperature: (DB/WB) 15°C/12°C; Water Inlet Temperature: 26°C.		
Heating Capacity (kW)	2.2	3.68
Consumed Power (kW)	0.53	0.78
COP	4.15	4.7
Max. Power Input (kW)	0.9	1.5
Max. Current (A)	4.1	7.1
Advised Pool Volume (m³)	5~12	10~20
Power Supply	220-240V~/ 50Hz	
Running Ambient Temperature Range (°C)	-5~43	
Heating Temperature Range (°C)	15~40	
Refrigerant	R32	
Water Pipe Connection (mm)	φ32 or φ38	
Sound Pressure 1m dB (A)	44	48
Water Flow Volume (m³/h)	1.5	2.5
Water Pressure Drop (kPa)	10	12
Water Proof Level	IPX4	
Net Dimensions(L*W*H) (mm)	425×290×431	505×360×545

Notice:
The above data is for reference only. The specific data is subject to actual product.

Seastar Series

Mini Pool Heat Pump



GUANGDONG NEW ENERGY TECHNOLOGY DEVELOPMENT CO., LTD.

NO.125, Chuangyou Road, Xintang Town, Zengcheng, Guangzhou, Guangdong, P.R.China


+86-20-86735355 info@newenergy-e.com www.newntide.com

Official Website

Applications



Inflatable Swimming Pool

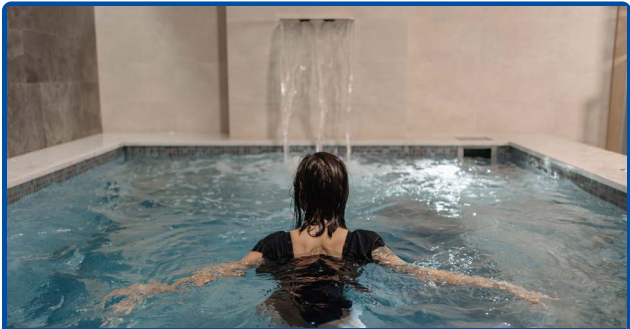

Spa Pool



Portable Swimming Pool



Jacuzzi

Easy Installation Plug and Play



Connect the hose



Plug it in



Press ON & Select heating

Compact and Portable Design

The compact and portable design allows you to enjoy swimming anytime, anywhere.



Up to 40°C

Maximum heating temperature up to 40°C, it can be used for small swimming pools and spa pools.

