

Qty.	Description
------	-------------

1	SOLOLIFT2 WC-3
---	-----------------------



Note! Product picture may differ from actual product

Product No.: On request

Sololift2 WC-3 is a small, compact automatic lifting station suitable for pumping of wastewater in private dwellings in places where wastewater cannot be led directly to the sewer by means of a natural downward slope.

Sololift2 WC-3 is suitable for pumping wastewater from a toilet containing toilet paper and faeces with additional connections on the lid and to the sides of the tank for, for example, washbasin, shower or bidet.

The pumping of liquids containing other material may cause faults and limit the scope of guarantee.

Sololift2 WC-3 is typically used to dewater:

- toilets, washbasins, showers and bidets in basements below sewer level, in connection with the renovation or modernisation of existing buildings, where the location may be remote from the main soil pipe so that a natural slope cannot be established.

Extremely low switching levels for the lowest construction heights, which can be an advantage in case of connection of a shower receptor.

The compact lifting station is equipped with:

- cable with or without plug (see technical data)
- horizontal or vertical fastening possibility of outlet-hose connector with several adaptors for pipes of Ø22-40 mm
- integrated non-return valve
- dry and high-performance motor unit incl. thermal protection, pressure switch and controller
- DN100 toilet connection hose
- two flexible connectors for inlet (adjustable in height) of pipes Ø36 or Ø40
- slot for an alarm board with buzzer (accessory)
- manual anti-clogging function and separate drain connection for service
- venting valve with overflow protection
- uplift fixation clips.

Design according to EN12050-3 and production inspection by external institute with unique features focused on quick installation, long-lasting operation and easy-clean service.

Note: The discharge adaptor can be mounted vertically or horizontally. Vertical installation increases the flow (see data booklet and curves)

Liquid:

Liquid temperature range: 0 .. 50 °C

Selected liquid temperature: 20 °C

Density: 998.2 kg/m³

Qty.	Description
1	<p>Technical:</p> <p>Pump speed on which pump data are based: 2800 rpm</p> <p>Rated flow: 1.37 l/s</p> <p>Maximum flow: 2.48 l/s</p> <p>Rated head: 6.21 m</p> <p>Type of impeller: VORTEX with GRINDER</p> <p>Max. Particle: 25 mm</p> <p>Approvals: CE,SEPRO,CHROHS,MORO,AAA</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p>Materials:</p> <p>Pump housing: Composite</p> <p>Impeller: Polymer - PPE</p> <p>Tank: PLASTIC PP</p> <p>Installation:</p> <p>Range of ambient temperature: 0 .. 40 °C</p> <p>Type of inlet connection: Smooth pipe</p> <p>Type of outlet connection: Smooth pipe</p> <p>Size of inlet connection: 32/36/40, 36/40/50, DN 100 1/-/1.25. -/1.25/1.5. 4 inch</p> <p>Size of outlet connection: 22/25/28/32/36/40 0.5/0.75/-/1.25 inch</p> <p>Pressure rating for connection: PN 1,5</p> <p>Number of leads: 3X0,75MM2</p> <p>Electrical data:</p> <p>Power input P1: 620 W</p> <p>Rated power - P2: 0.42 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 1 x 220-240 V</p> <p>Rated current: 3 A</p> <p>Cos phi - power factor: 0.92</p> <p>Number of poles: 2</p> <p>Enclosure class (IEC 34-5): IP44</p> <p>Insulation class (IEC 85): F</p> <p>Power cable type: H05VV-F-3G</p> <p>Length of power cable: 1.2 m</p> <p>Power plug: SCHUKO</p> <p>Tank:</p> <p>Tank volume nominal: 9 l</p> <p>Others:</p> <p>Net weight: 7.28 kg</p> <p>Gross weight: 9.27 kg</p> <p>Shipping volume: 0.052 m³</p>



Company name:

Created by:


Phone:

Date:


27/02/2026

Qty.	Description
1	<div>Danish VVS No.: 614363632</div> <div>Swedish RSK No.: 5886546</div> <div>Finnish LVI No.: 4965313</div> <div>Norwegian NRF no.: 9045715</div> <div>Environmental approvals: WEEE</div>





On request SOLOLIFT2 WC-3 50 Hz

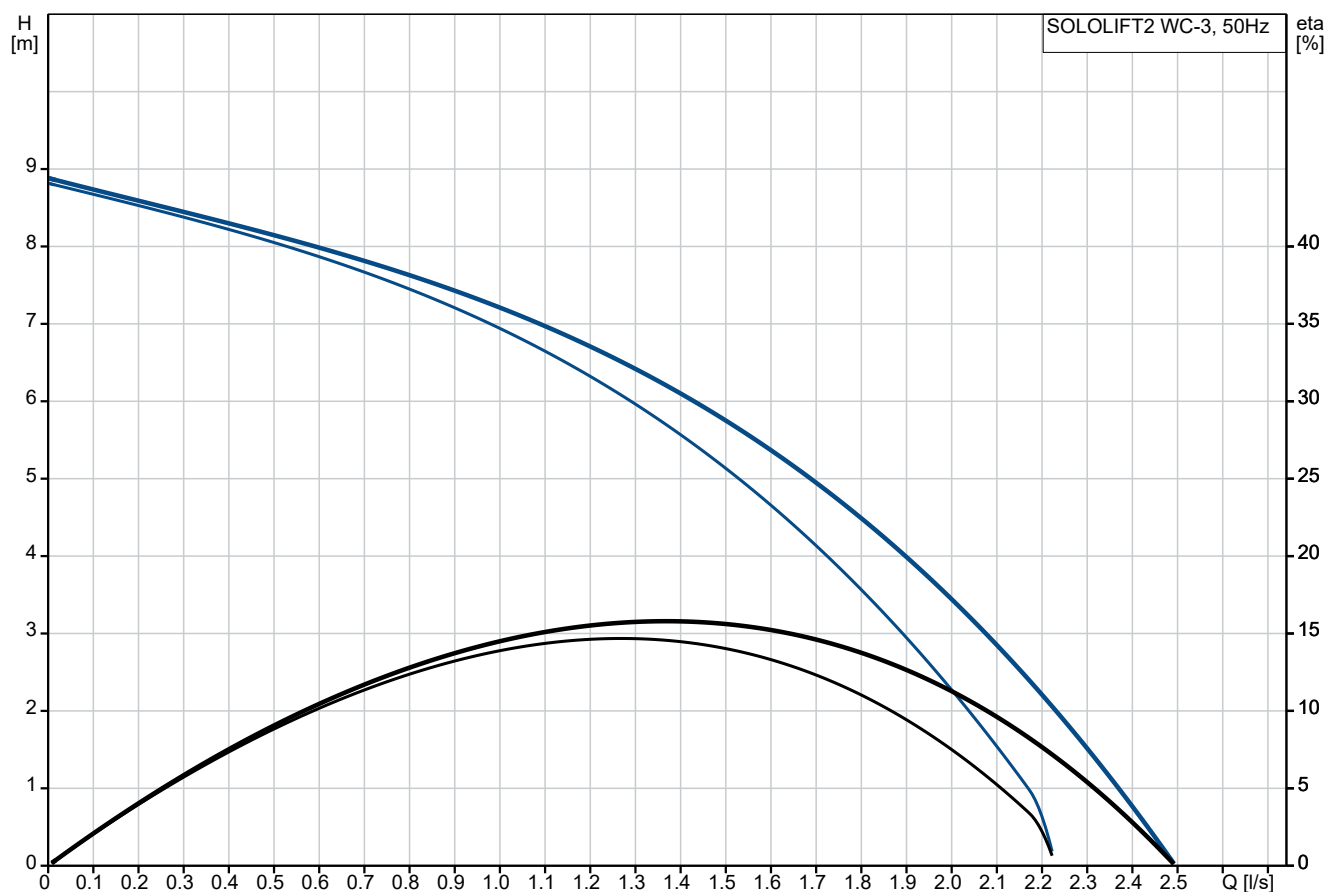

Liquid temperature during operation = 20 °C

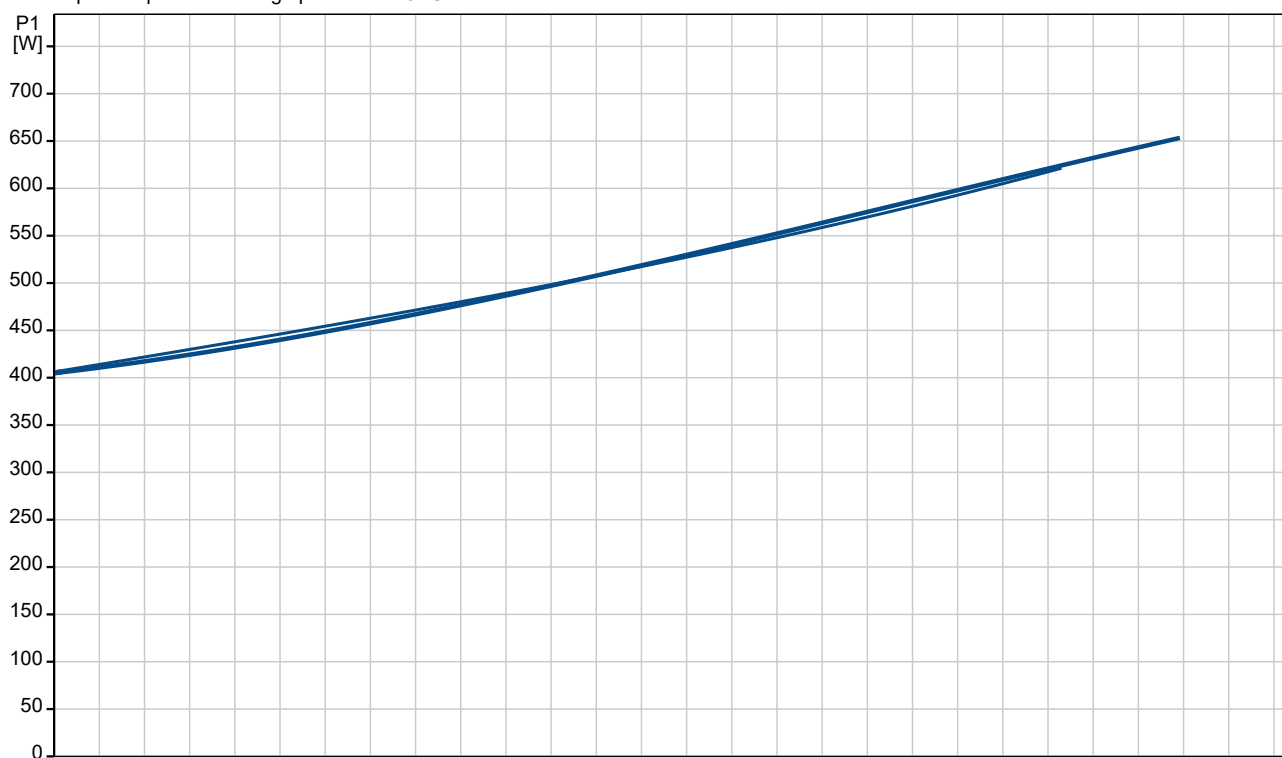

Description	Value
General information:	
Product name:	SOLOLIFT2 WC-3
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	2800 rpm
Rated flow:	1.37 l/s
Maximum flow:	2.48 l/s
Rated head:	6.21 m
Maximum head:	8.5 m
Type of impeller:	VORTEX with GRINDER
Max. Particle:	25 mm
Approvals:	CE, SEPRO, CHROHS, MOR O, AAA
Curve tolerance:	ISO9906:2012 3B
Materials:	
Pump housing:	Composite
Impeller:	Polymer - PPE
Tank:	PLASTIC
	PP
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of inlet connection:	Smooth pipe
Type of outlet connection:	Smooth pipe
Size of inlet connection:	32/36/40, 36/40/50, DN 100
	1/-1.25. -1.25/1.5. 4 inch
Size of outlet connection:	22/25/28/32/36/40
	0.5/0.75/-1.25 inch
Pressure rating for connection:	PN 1,5
Number of leads:	3X0,75MM2
Liquid:	
Liquid temperature range:	0 .. 50 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	620 W
Rated power - P2:	0.42 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	3 A
Cos phi - power factor:	0.92
Number of poles:	2
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Thermal protec:	THERMIK S06-150-05
Power cable type:	H05VV-F-3G
Length of power cable:	1.2 m
Power plug:	SCHUKO
Tank:	
Tank volume nominal:	9 l
Others:	
Net weight:	7.28 kg
Gross weight:	9.27 kg
Shipping volume:	0.052 m³
Danish VVS No.:	614363632
Swedish RSK No.:	5886546

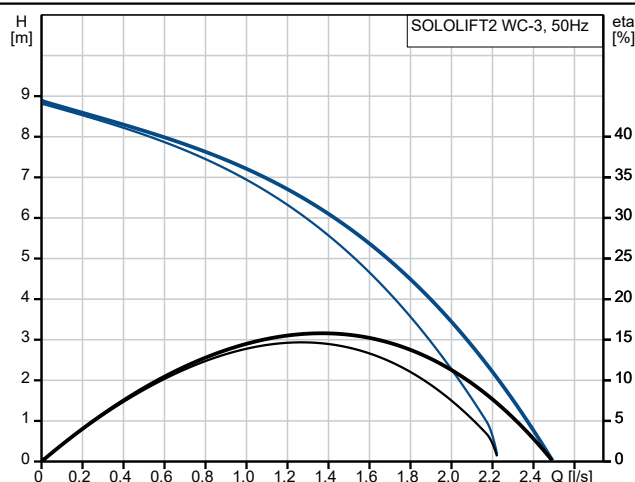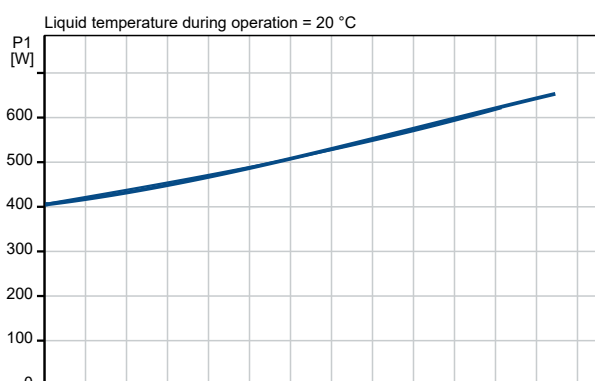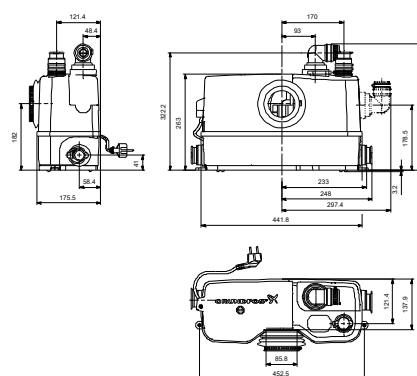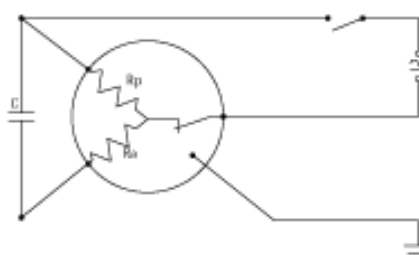



Company name:

Created by:




Phone:

Date:

27/02/2026

Description	Value
Finnish LVI No.:	4965313
Norwegian NRF no.:	9045715
Environmental approvals:	WEEE

On request SOLOLIFT2 WC-3 50 Hz

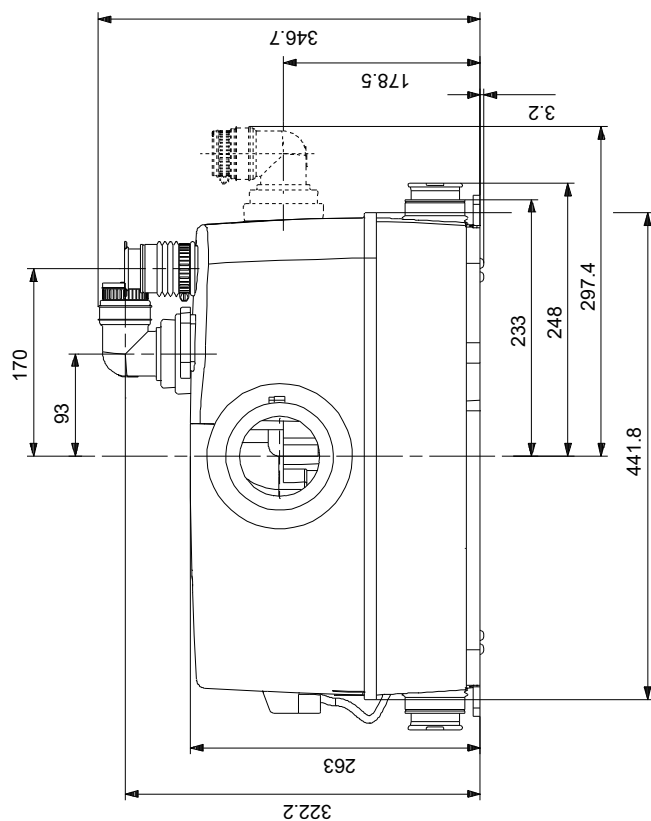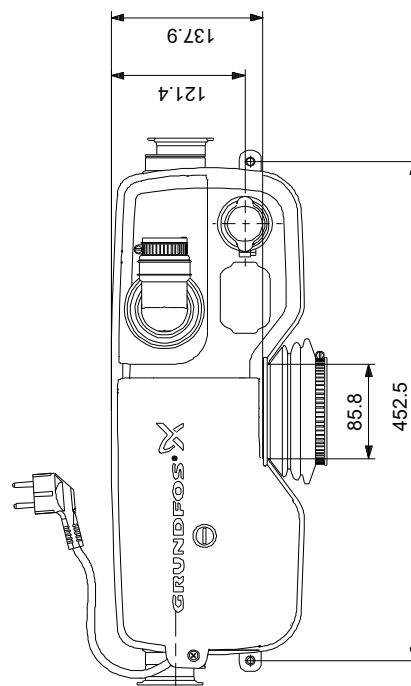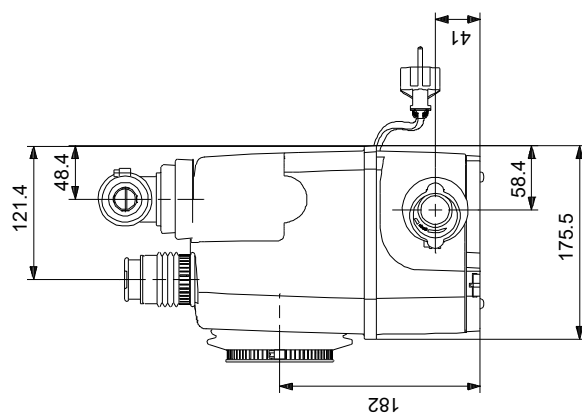

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

