


# GS1016 GS1024 series


Network Switch

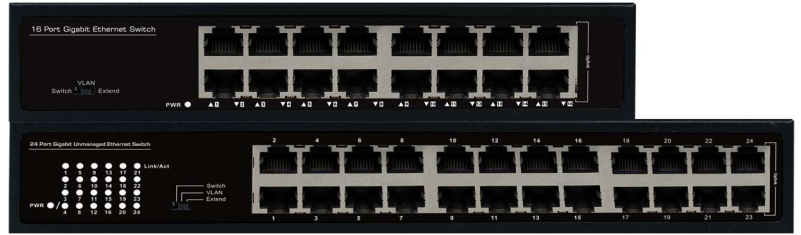

## Features

- 16/24 x 10/100/1000 Mbps
- Easy Set-up: Plug and Play
- Switching Capacity: 32/48 gbps
- Port Status: LED Indicator
- Green NET Energy Savings

## Applications

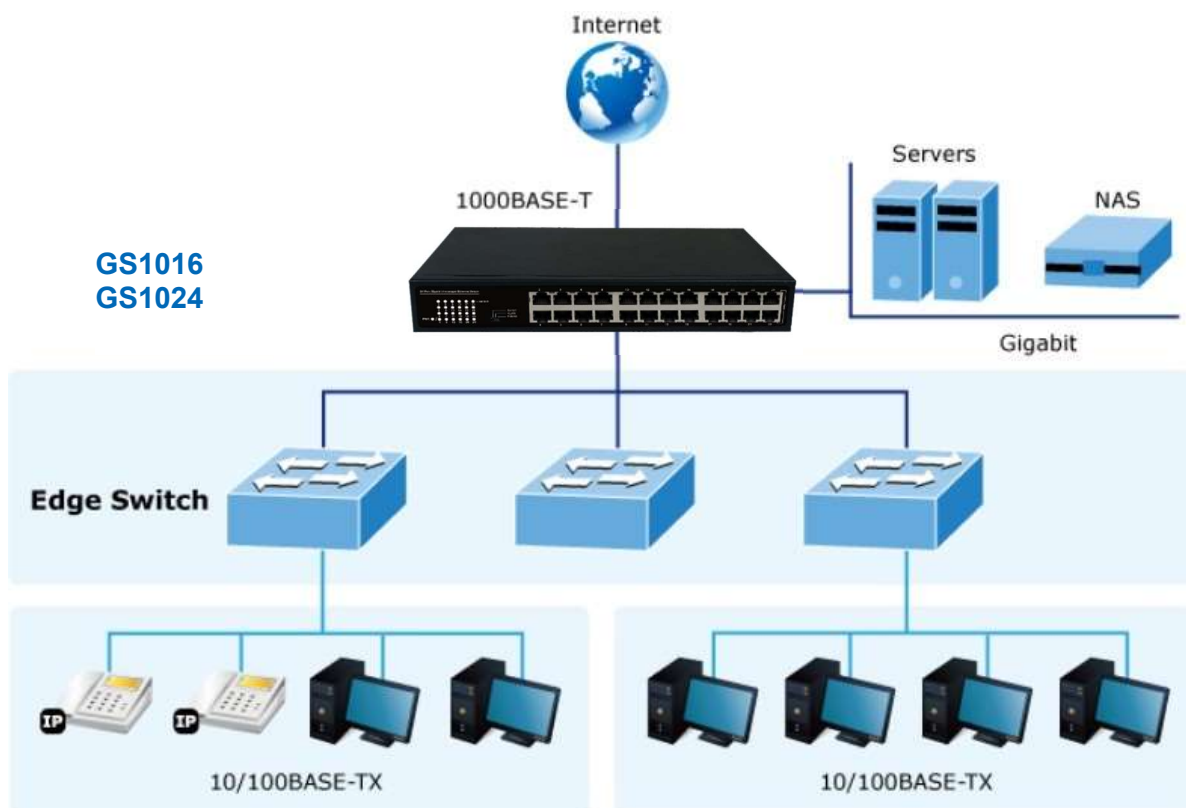

## Technical Specifications-Hardware

|                                                                    | S7016                           | S7024                           |
|--------------------------------------------------------------------|---------------------------------|---------------------------------|
| <b>Network Specifications</b>                                      |                                 |                                 |
| Total Gigabit Ports                                                | 16                              | 24                              |
| Auto MDI/MDIX                                                      | v                               | v                               |
| 1GbpsFullDuplex<br>100MbpsFullH/alfDuplex<br>10MbpsFullH/alfDuplex | v                               | v                               |
| Forwarding Capacity                                                | 26Mpps                          | 38Mbps                          |
| Mac Table                                                          | 8k                              | 8k                              |
| Jumbo Frames                                                       | 9,216Bytes                      | 9,216Bytes                      |
| Switching Capacity                                                 | 32Gbps                          | 48Gbps                          |
| <b>Power Specifications</b>                                        |                                 |                                 |
| Input Voltage                                                      | 100VAC~240VAC                   | 100VAC~240VAC                   |
| <b>Mechanical Specifications</b>                                   |                                 |                                 |
| Dimensions (WxDxH)                                                 | 200x118x44mm                    | 270x180x44mm                    |
| Weight                                                             | 3KG                             | 3KG                             |
| <b>Environmental Specifications</b>                                |                                 |                                 |
| Operating Temperature                                              | 0° C ~ 50° C (32° F ~122° F)    | 0° C ~ 50° C (32° F ~122° F)    |
| Storage Temperature                                                | -20° C ~ 70° C (-4° F ~ 158° F) | -20° C ~ 70° C (-4° F ~ 158° F) |
| Operating Humidity                                                 | 10% to90 % non-condensing       | 10%to90%non-condensing          |
| <b>Certifications</b>                                              |                                 |                                 |
| EMC                                                                | CE, FCC, VCCI, C-Tick Class A   | CE, FCC, VCCI, C-Tick Class A   |
| Safety                                                             | EN62368-1, IEC62368-1           | EN62368-1, IEC62368-1           |
| Surge                                                              | IEC-6100045                     | IEC-61000-4-5                   |

## Ordering Information

| UCY Giga Unmanaged Switches                                                         |                                                |                                                                                      |                                                |
|-------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------|
|  | <b>GS1016</b><br>•16 x GbE Rj45<br>•100~240VAC |  | <b>GS1024</b><br>•24 x GbE Rj45<br>•100~240VAC |