

Kseries
COLUMN SYSTEM



pro audio



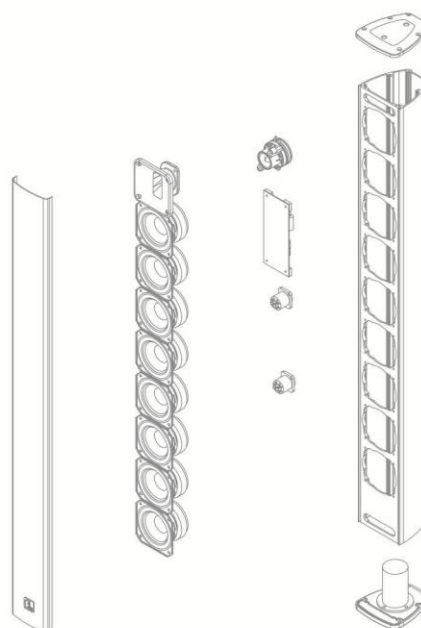
K series is a group of two-way column system with two channels digital amplifier with DSP. The small-sized column uses aluminum alloy housing and neodymium units, with small size, light weight, high sensitivity, clear and bright sound, can be used alone or combined with active subwoofers into a sound reinforcement system. K12BAS, K15BAS are active subwoofers with two channels digital amplifier with DSP.

FEATURES

- Small volume and light weight for full range speaker
- Clear and bright sound for full range
- Full function, rich and elastic bass
- Multiple ways of installation and combination

APPLICATIONS

- Band performance
- Small mobile business performance,
- Conference rooms
- Multi-purpose halls
- Churches





pro audio

K series Column Speaker

Two-way Loudspeaker System



MODEL	K3	K12B	K12BAS
FREQUENCY RESPONSE(-3dB)	125Hz-18kHz	45Hz-250Hz	LF:45Hz-250Hz, System 45Hz-18kHz
FREQUENCY RESPONSE(-10dB)	120Hz-20kHz	40Hz-300Hz	LF:40Hz-300Hz, System 40Hz-20kHz
LF DRIVER	8×3" Neo /0.8"voice coil	1×12"/ 3"voice coil	1×12"/ 3"voice coil
HF DRIVER	1×1" Neo /1"voice coil	--	--
RATED POWER	200W RMS,800W peak	300W RMS,1200W peak	1500W/8Ω+460W/8Ω
SENSITIVITY(1watt/1meter)	97dB	96dB	--
MAXIMUM SPL	120 dB continuous,126dB peak	121dB continuous,127dB peak	121dB continuous,127dB peak
IMPEDANCE	8 ohms	8 ohms	--
DISPERSION(-6dB)	120°×30°	--	--
CROSSOVER FREQUENCIES	2.9 kHz	--	--
INPUT CONNECTORS	2×Speakon NL4	2×Speakon NL4	XLR
PACKAGE SIZE	955×305×160 mm (1 Pair)	605×415×632 mm	605×415×632 mm
NET WEIGHT	6 kg/pc	24 kg/pc	26 kg/pc
GROSS WEIGHT	15 kg/pair	28 kg/pc	30 kg/pc

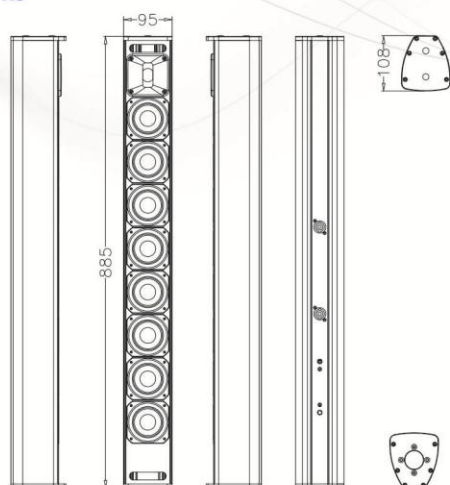
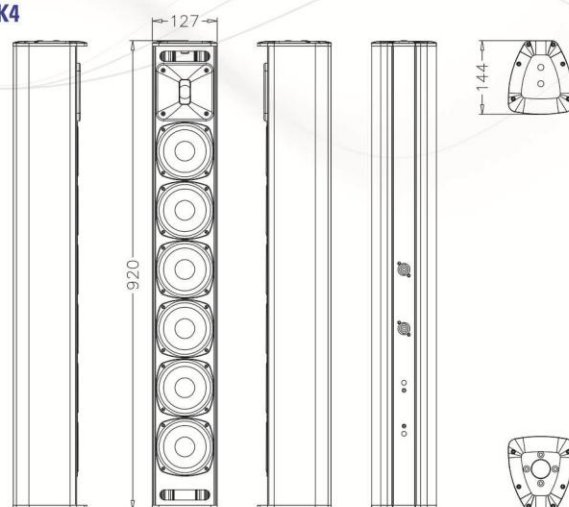
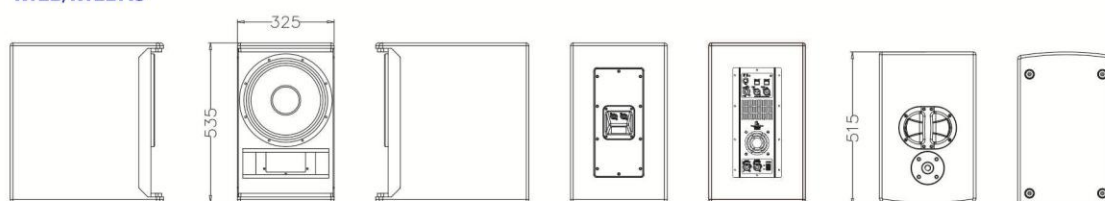
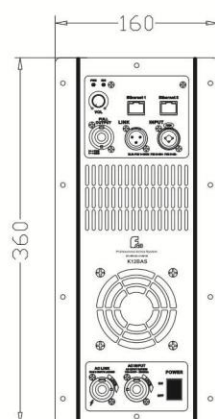
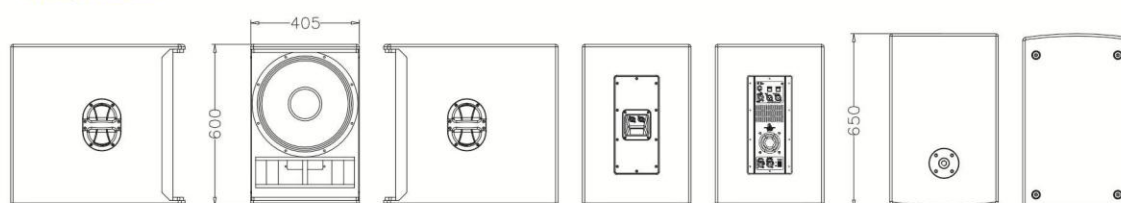
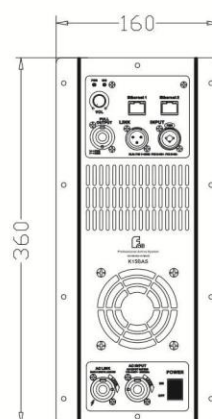
K series Column Speaker

Two-way Loudspeaker System



MODEL	K4	K15B	K15BAS
FREQUENCY RESPONSE(-3dB)	125Hz-18kHz	45Hz-250Hz	LF:45Hz-250Hz, System 45Hz-18kHz
FREQUENCY RESPONSE(-10dB)	120Hz-20kHz	40Hz-300Hz	LF:40Hz-300Hz, System 40Hz-20kHz
LF DRIVER	6×4" Neo / 1"voice coil	1×15" / 3"voice coil	1×15" / 3"voice coil
HF DRIVER	1×1" Neo / 1.7"voice coil	--	--
RATED POWER	200W RMS,800W peak	400W RMS,1600W peak	1500W/8Ω + 460W/8Ω
SENSITIVITY(1watt/1meter)	97dB	99dB	--
MAXIMUM SPL	120dB continuous,126dB peak	125dB continuous,131dB peak	125dB continuous,131dB peak
IMPEDANCE	6 ohms	8 ohms	--
DISPERSION(-6dB)	100°×40°	--	--
CROSSOVER FREQUENCIES	2.7kHz	--	--
INPUT CONNECTORS	2×Speakon NL4	2×Speakon NL4	XLR
PACKAGE SIZE	990×380×193mm (1 Pair)	742×497×698 mm	742×497×698 mm
NET WEIGHT	9 kg/pc	32 kg/pc	34 kg/pc
GROSS WEIGHT	22 kg/pair	36 kg/pc	38 kg/pc

K Configuration

K3

K4

K12B/K12BAS

K15B/K15BAS

K12BAS

K15BAS