

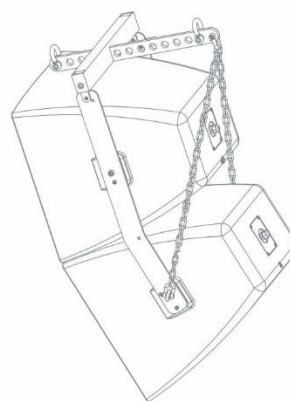


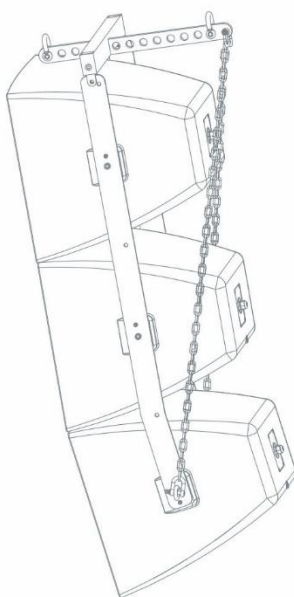

pro audio

LT-H series

ALL-WEATHER MID-LONG THROW SPEAKER

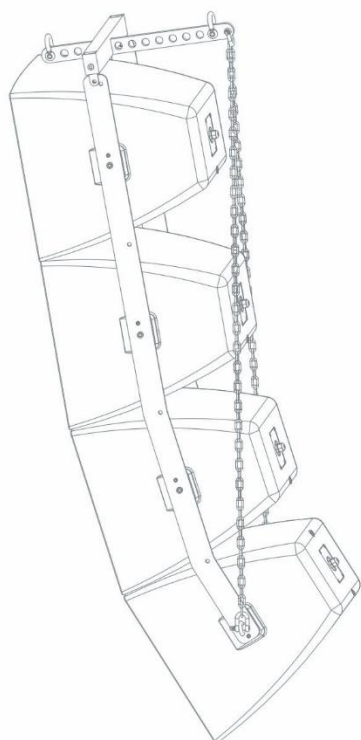

LT215L/LT215LT/LT215LH/LT215LHT
Hanging Diagram

LT-H series LT206H LT206HT

1x6.5" Two-way Loudspeaker

LT-H series LT208H LT208HT

1x8" Two-way Loudspeaker



MODEL	LT206H	LT206HT	LT208H	LT208HT
FREQUENCY RESPONSE(-3dB)	105Hz-17kHz	105Hz-17kHz	80Hz-18kHz	80Hz-18kHz
FREQUENCY RESPONSE(-10dB)	100Hz-18kHz	100Hz-18kHz	75Hz-20kHz	75Hz-20kHz
LF DRIVER	1×6.5" / 1.4" voice coil	1×6.5" / 1.4" voice coil	1×8" / 2" voice coil	1×8" / 2" voice coil
HF DRIVER	1×0.8" / 1" voice coil	1×0.8" / 1" voice coil	1×1" / 1.4" voice coil	1×1" / 1.4" voice coil
INPUT VOLTAGE	--	100V	--	100V
RATED POWER	100W RMS,400W peak	25W/50W/100W/OFF/8Ω 100W	150W RMS,600W peak	37.5W/75W/150W/OFF/8Ω 150W
SENSITIVITY(1watt/1meter)	93dB	93dB	96dB	96dB
MAXIMUM SPL	113dB continuous,119dB peak	113dB continuous,119dB peak	118dB continuous,124dB peak	118dB continuous,124dB peak
IMPEDANCE	8 ohms	8 ohms	8 ohms	8 ohms
DISPERSION(-6dB)	100°×100°	100°×100°	80°×80°	80°×80°
CROSSOVER FREQUENCIES	2.8kHz	2.8kHz	2.5kHz	2.5kHz
INPUT CONNECTORS	covered barrier strip terminals	covered barrier strip terminals	covered barrier strip terminals	covered barrier strip terminals
PACKAGE SIZE	323×323×293 mm	323×323×293 mm	362×332×335 mm	362×332×335 mm
NET WEIGHT	6 kg/pc	7 kg/pc	10 kg/pc	11 kg/pc
GROSS WEIGHT	7.5 kg/pc	8.5 kg/pc	12 kg/pc	13 kg/pc



pro audio

LT-H series LT212H 1x12" Two-way Loudspeaker



LT-H series LT215H 1x15" Two-way Loudspeaker



MODEL	LT212H	LT212HT	LT215H	LT215HT
FREQUENCY RESPONSE(-3dB)	55Hz-18kHz	55Hz-18kHz	50Hz-18kHz	50Hz-18kHz
FREQUENCY RESPONSE(-10dB)	50Hz-20kHz	50Hz-20kHz	45Hz-20kHz	45Hz-20kHz
LF DRIVER	1 × 12"/ 3"voice coil	1 × 12"/ 3"voice coil	1 × 15"/ 3"voice coil	1 × 15"/ 3"voice coil
HF DRIVER	1 × 1"/ 1.7"voice coil	1 × 1"/ 1.7"voice coil	1 × 1.4"/ 3"voice coil	1 × 1.4"/ 3"voice coil
INPUT VOLTAGE	--	100V	--	100V
RATED POWER	300W RMS,1200W peak	50W/100W/200W/OFF/8Ω 300W	400W RMS,1600W peak	75W/150W/300W/OFF/8Ω 400W
SENSITIVITY(1watt/1meter)	98dB	98dB	103dB	103dB
MAXIMUM SPL	123dB continuous,129dB peak	123dB continuous,129dB peak	129dB continuous,135dB peak	129dB continuous,135dB peak
IMPEDANCE	8 ohms	8 ohms	8 ohms	8 ohms
DISPERSION(-6dB)	70° × 50°	70° × 50°	60° × 40°	60° × 40°
CROSSOVER FREQUENCIES	2.2kHz	2.2kHz	1.5kHz	1.5kHz
INPUT CONNECTORS	covered barrier strip terminals	covered barrier strip terminals	covered barrier strip terminals	covered barrier strip terminals
PACKAGE SIZE	472 × 442 × 460 mm	472 × 442 × 460 mm	610 × 585 × 570 mm	610 × 585 × 570 mm
NET WEIGHT	18 kg/pc	20 kg/pc	28.5 kg/pc	31 kg/pc
GROSS WEIGHT	20 kg/pc	22 kg/pc	31.5 kg/pc	34 kg/pc

LT-H series LT215LH 1x15" Two-way Line Array speaker

LT-H series LT115BH 1x15" Subwoofer




MODEL	LT215LH	LT215LHT	LT115BH	LT115BHT
FREQUENCY RESPONSE(-3dB)	50Hz-18kHz	50Hz-18kHz	50Hz-250Hz	50Hz-250Hz
FREQUENCY RESPONSE(-10dB)	45Hz-20kHz	45Hz-20kHz	45Hz-300Hz	45Hz-300Hz
LF DRIVER	1 × 15"/ 3"voice coil	1 × 15"/ 3"voice coil	1 × 15"/ 3"voice coil	1 × 15"/ 3"voice coil
HF DRIVER	1 × 1.4"/ 3"voice coil	1 × 1.4"/ 3"voice coil	--	--
INPUT VOLTAGE	--	100V	--	100V
RATED POWER	400W RMS,1600W peak	75W/150W/300W/OFF/8Ω 400W	400W RMS,1600W peak	75W/150W/300W/OFF/8Ω 400W
SENSITIVITY(1watt/1meter)	103dB	103dB	98dB	98dB
MAXIMUM SPL	129dB continuous,135dB peak	129dB continuous,135dB peak	124dB continuous,130dB peak	124dB continuous,130dB peak
IMPEDANCE	8 ohms	8 ohms	8 ohms	8 ohms
DISPERSION(-6dB)	60° × 25°	60° × 25°	--	--
CROSSOVER FREQUENCIES	1.5kHz	1.5kHz	--	--
INPUT CONNECTORS	covered barrier strip terminals	covered barrier strip terminals	covered barrier strip terminals	covered barrier strip terminals
PACKAGE SIZE	610 × 585 × 570 mm	610 × 585 × 570 mm	610 × 585 × 570 mm	610 × 585 × 570 mm
NET WEIGHT	29 kg/pc	31.5 kg/pc	22 kg/pc	24.5 kg/pc
GROSS WEIGHT	32 kg/pc	34.5 kg/pc	25 kg/pc	27.5 kg/pc




LT/LTH Configuration


LT206/LT206T LT206H/LT206HT




LT208/LT208T LT208H/LT208HT

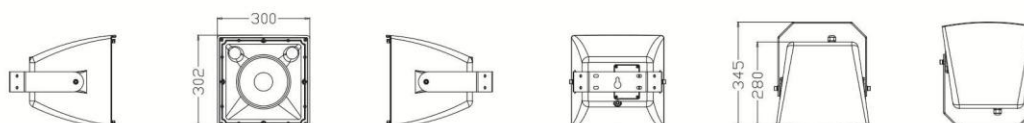


LT212/LT212T LT212H/LT212HT

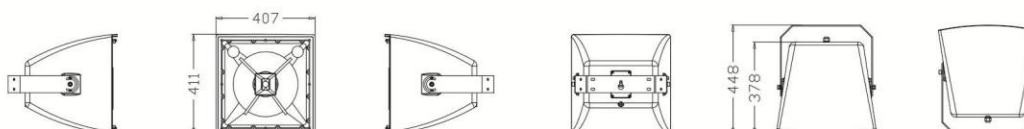


LT215/LT215T LT215H/LT215HT

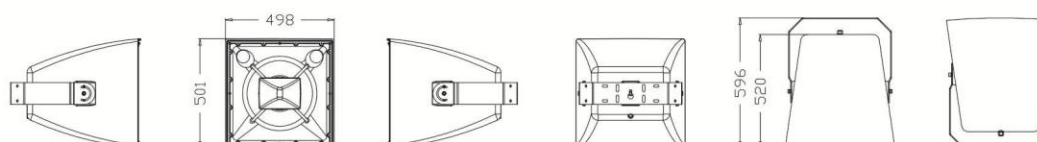

LT215L/LT215LT LT215LH/LT215LHT

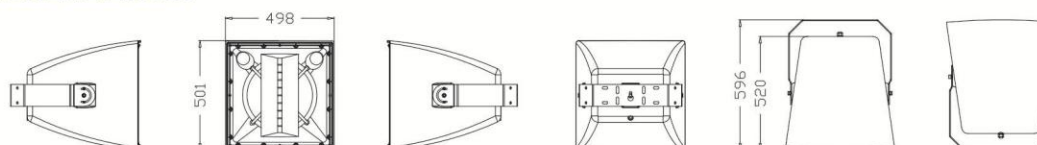


LT115B/LT115BT LT115BH/LT115BHT

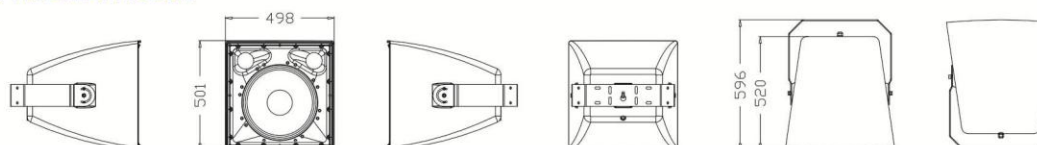


LT/LTH Accessories & Configuration


**U TYPE BRACKET
LT206**

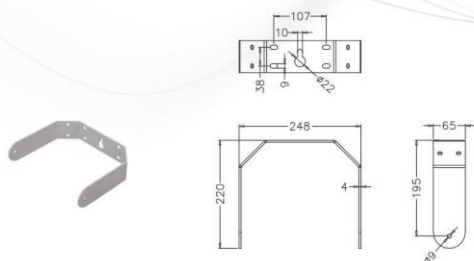


**U TYPE BRACKET
LT208**

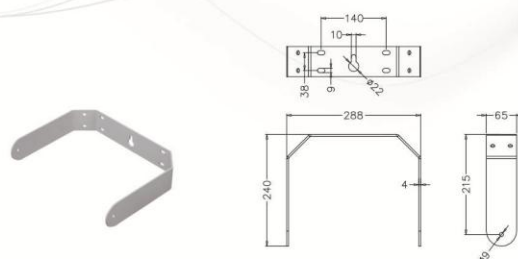

**U TYPE BRACKET
LT212**

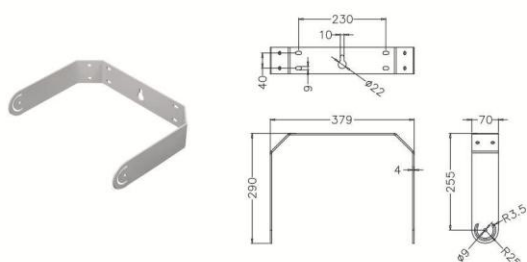


**U TYPE BRACKET
LT215**

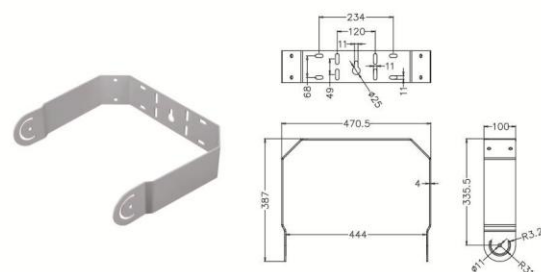


**RIGGING FRAME
LT215L**



**CONNECT PLATE-2
LT215L**

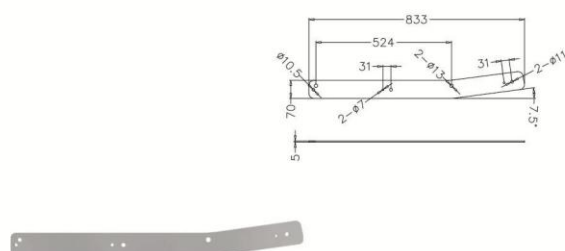

**CONNECT PLATE-3
LT215L**

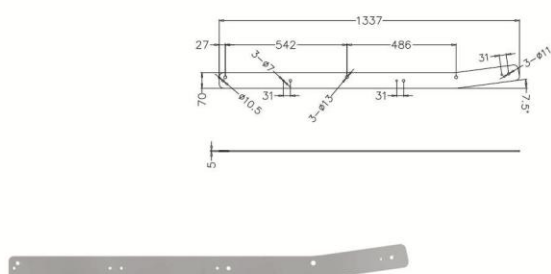

**CONNECT PLATE-4
LT215L**

