




S series is a group of multi-purpose professional speaker with the characteristics of high power, high SPL, clear and bright full-range sound, rich and elastic bass, all use high quality units. The cabinet is made of multi-layer composite plywood with wear-resistant polyurea paint.

FEATURES

- High quality units, high strength plywood
- Multi-hanging points and support, easy and quick operation
- Complete models

APPLICATIONS

- Conference rooms
- Multi-purpose halls
- Various entertainment venues,
- Mobile performances

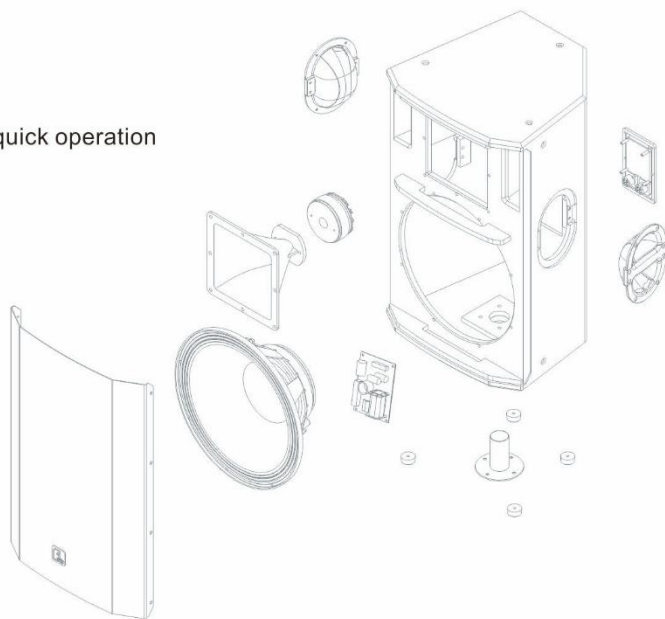

S series Multi-Purpose Speaker

Two-way Full-range Loudspeaker System



pro audio



MODEL	S106	S206	S108
FREQUENCY RESPONSE(-3dB)	90 Hz-18kHz	90 Hz-18kHz	80 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	85Hz-20KHz	85Hz-20KHz	75Hz-20KHz
LF DRIVER	1× 6.5"/ 2"voice coil	2× 6.5"/ 2"voice coil	1× 8"/ 2"voice coil
HF DRIVER	1× 1"/ 1"voice coil	1× 1"/ 1.4"voice coil	1× 1"/ 1"voice coil
RATED POWER	120W RMS,480W peak	240W RMS,960W peak	150W RMS,600W peak
SENSITIVITY(1watt/1meter)	90dB	93dB	93dB
MAXIMUM SPL	111dB continuous,117dB peak	116dB continuous,122dB peak	115dB continuous,121dB peak
IMPEDANCE	8 ohms	4 ohms	8 ohms
DISPERSION(-6dB)	110°× 50°	90°× 50°	90°× 50°
CROSSOVER FREQUENCIES	2.5kHz	300Hz, 2.5kHz	2.8kHz
INPUT CONNECTORS	Covered barrier strip terminals	Covered barrier strip terminals	Covered barrier strip terminals
PACKAGE SIZE	530× 280× 450 mm(1 Pair)	280× 280× 490 mm	340× 340× 518 mm
NET WEIGHT	7 kg/pc	10 kg/pc	10 kg/pc
GROSS WEIGHT	16 kg/pair	12 kg/pc	12 kg/pc



pro audio

S series Multi-Purpose Speaker

Two-way Full-range Loudspeaker System



MODEL	S208	S110	S112	S112DA
FREQUENCY RESPONSE(-3dB)	80 Hz-18kHz	70 Hz-18kHz	55Hz-18KHz	55Hz-18KHz
FREQUENCY RESPONSE(-10dB)	75Hz-20KHz	65 Hz-20kHz	50Hz-20KHz	50Hz-20KHz
LF DRIVER	2× 8"/ 2"voice coil	1× 10"/ 2.5"voice coil	1× 12"/ 3"voice coil	1× 12"/ 3"voice coil
HF DRIVER	1× 1"/ 1.4"voice coil	1× 1"/ 1.7"voice coil	1× 1"/ 1.7"voice coil	1× 1"/ 1.7"voice coil
RATED POWER	300W RMS,1200W peak	250W RMS,1000W peak	300W RMS,1200W peak	1500W/Ω+ 460W/Ω
SENSITIVITY(1watt/1meter)	96dB	95dB	97dB	--
MAXIMUM SPL	120dB continuous,126dB peak	119dB continuous,125dB peak	122dB continuous,128dB peak	122dB continuous,128dB peak
IMPEDANCE	4 ohms	8 ohms	8 ohms	--
DISPERSION(-6dB)	90°× 50°	90°× 50°	90°× 50°	90°× 50°
CROSSOVER FREQUENCIES	300Hz, 3kHz	1.7kHz	1.7kHz	--
INPUT CONNECTORS	Covered barrier strip terminals	2× Speakon NL4	2× Speakon NL4	XLR
PACKAGE SIZE	360× 360× 555 mm	395× 395× 575 mm	470× 470× 715 mm	470× 470× 715 mm
NET WEIGHT	14 kg/pc	14 kg/pc	20 kg/pc	22 kg/pc
GROSS WEIGHT	16 kg/pc	17 kg/pc	24 kg/pc	26 kg/pc

series Multi-Purpose Speaker

Two-way Full-range Loudspeaker System



pro audio



MODEL	S115	S115DA	S115H	S215
FREQUENCY RESPONSE(-3dB)	55Hz-18KHz	55Hz-18KHz	55Hz-18KHz	50Hz-18KHz
FREQUENCY RESPONSE(-10dB)	50Hz-20KHz	50Hz-20KHz	50Hz-20KHz	45Hz-20KHz
LF DRIVER	1 × 15"/ 3"voice coil	1 × 15"/ 3"voice coil	1 × 15"/ 3"voice coil	2 × 15"/ 3"voice coil
HF DRIVER	1 × 1"/ 1.7"voice coil	1 × 1"/ 1.7"voice coil	1 × 1.4"/ 3"voice coil	1 × 2"/ 3"voice coil
RATED POWER	400W RMS,1600W peak	1500W/Ω+460W/Ω	400W RMS,1600W peak	800W RMS,3200W peak
SENSITIVITY(1watt/1meter)	98dB	--	98dB	99dB
MAXIMUM SPL	124dB continuous,130dB peak	124dB continuous,130dB peak	124dB continuous,130dB peak	128dB continuous,134dB peak
IMPEDANCE	8 ohms	--	8 ohms	4 ohms
DISPERSION(-6dB)	80° × 50°	80° × 50°	90° × 50°	80° × 40°
CROSSOVER FREQUENCIES	1.6kHz	--	1.3kHz	1.3kHz
INPUT CONNECTORS	2 × Speakon NL4	XLR	2 × Speakon NL4	2 × Speakon NL4
PACKAGE SIZE	510 × 510 × 791 mm	510 × 510 × 791 mm	550 × 525 × 810 mm	715 × 615 × 1255 mm
NET WEIGHT	24 kg/pc	26 kg/pc	26 kg/pc	55 kg/pc
GROSS WEIGHT	29 kg/pc	31 kg/pc	31 kg/pc	61 kg/pc



pro audio

S series Multi-Purpose Speaker Subwoofer System



MODEL	S115B	S115BAS
FREQUENCY RESPONSE(-3dB)	45Hz-250Hz	45Hz-250Hz
FREQUENCY RESPONSE(-10dB)	40Hz-300Hz	40Hz-300Hz
LF DRIVER	1 × 15"/ 4"voice coil	1 × 15"/ 4"voice coil
RATED POWER	600W RMS	1500W/Ω+
	2400W peak	460W/Ω
SENSITIVITY(1watt/1meter)	99dB	--
MAXIMUM SPL	127dB continuous	127dB continuous
	133dB peak	133dB peak
NOMINAL IMPEDANCE	8 ohms	--
INPUT CONNECTORS	2 × Speakon NL4	XLR
PACKAGE SIZE	662 × 540 × 597 mm	662 × 540 × 597 mm
NET WEIGHT	31 kg/pc	33 kg/pc
GROSS WEIGHT	34 kg/pc	36 kg/pc

MODEL	S118B	S118BAS
FREQUENCY RESPONSE(-3dB)	40Hz-250Hz	40Hz-250Hz
FREQUENCY RESPONSE(-10dB)	35Hz-300Hz	35Hz-300Hz
LF DRIVER	1 × 18"/ 4"voice coil	1 × 18"/ 4"voice coil
RATED POWER	600W RMS	1500W/Ω+
	2400W peak	460W/Ω
SENSITIVITY(1watt/1meter)	100dB	--
MAXIMUM SPL	128dB continuous	128dB continuous
	134dB peak	134dB peak
NOMINAL IMPEDANCE	8 ohms	--
INPUT CONNECTORS	2 × Speakon NL4	XLR
PACKAGE SIZE	870 × 652 × 640 mm	870 × 652 × 640 mm
NET WEIGHT	40 kg/pc	42 kg/pc
GROSS WEIGHT	48 kg/pc	50 kg/pc


MODEL	S218B	S218BA
FREQUENCY RESPONSE(-3dB)	40Hz-250Hz	40Hz-250Hz
FREQUENCY RESPONSE(-10dB)	35Hz-300Hz	35Hz-300Hz
LF DRIVER	2 × 18"/ 4"voice coil	2 × 18"/ 4"voice coil
RATED POWER	1200W RMS	1200W/Ω+
	4800W peak	1200W/Ω
SENSITIVITY(1watt/1meter)	103dB	--
MAXIMUM SPL	134dB continuous	134dB continuous
	140dB peak	140dB peak
NOMINAL IMPEDANCE	4 ohms	--
INPUT CONNECTORS	2 × Speakon NL4	XLR
PACKAGE SIZE	1272 × 872 × 658 mm	1272 × 872 × 658 mm
NET WEIGHT	82 kg/pc	84 kg/pc
GROSS WEIGHT	90 kg/pc	92 kg/pc

Configuration




pro audio


S106

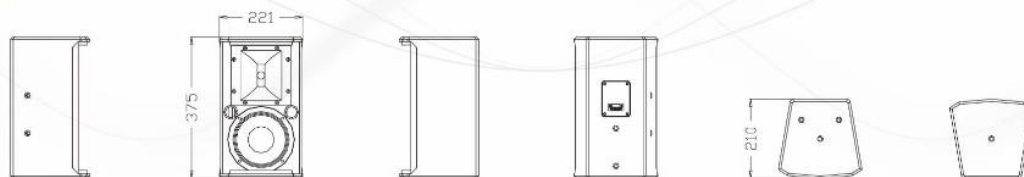


S206

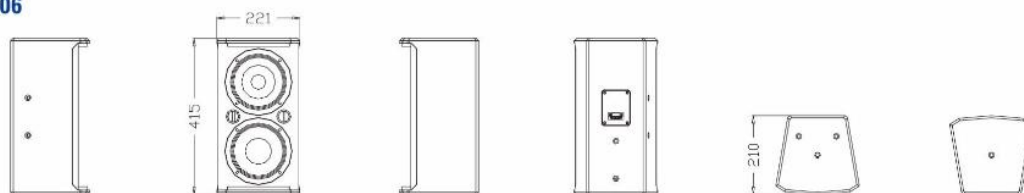


S108

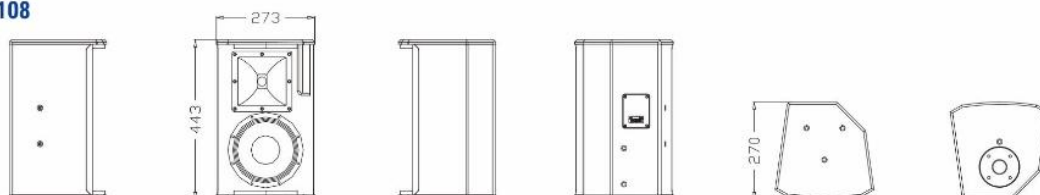


S208

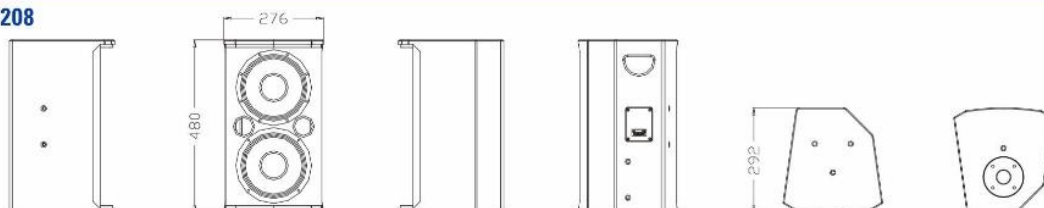


S110

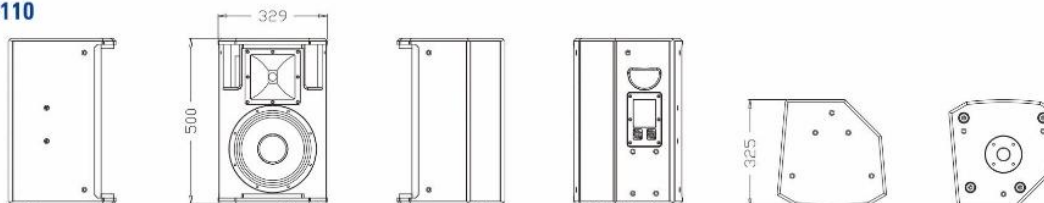






S112/S112DA

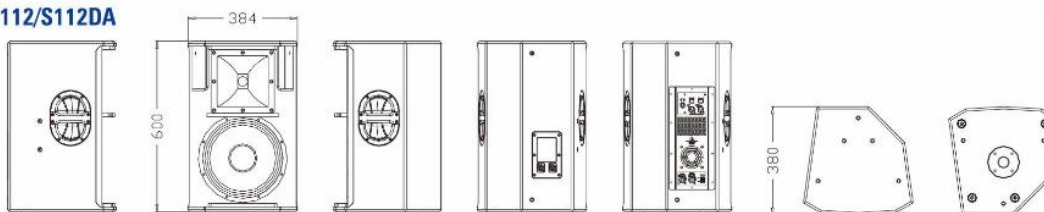

S115/S115DA

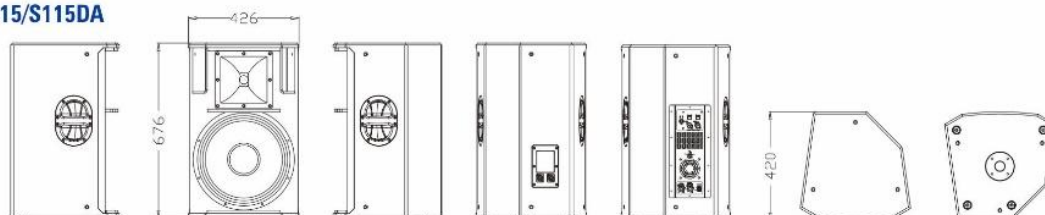

Configuration

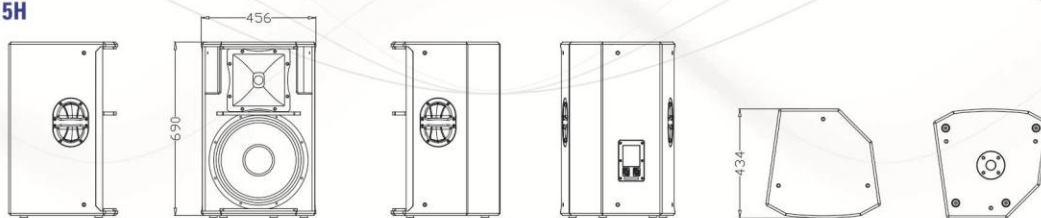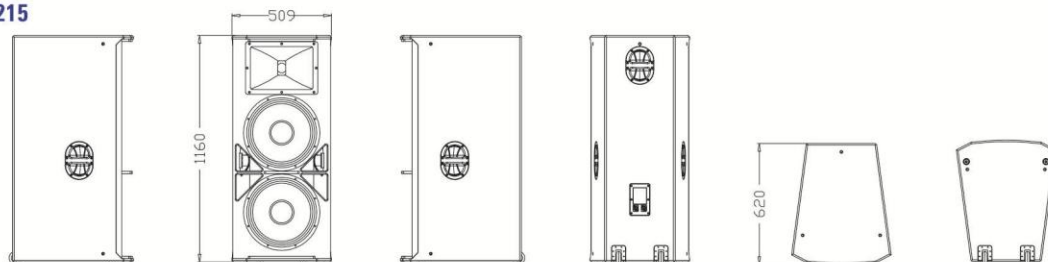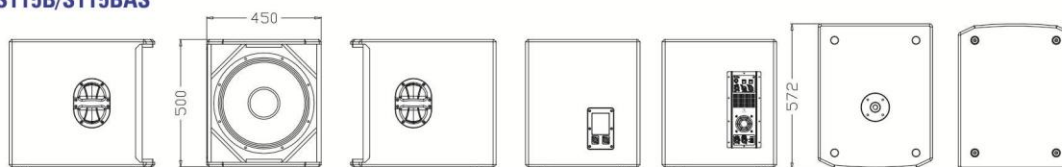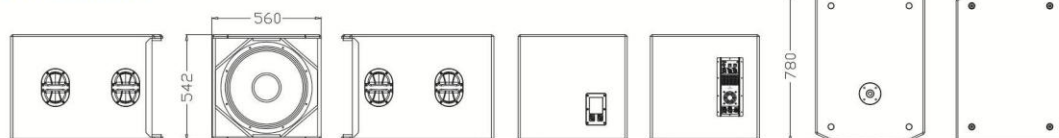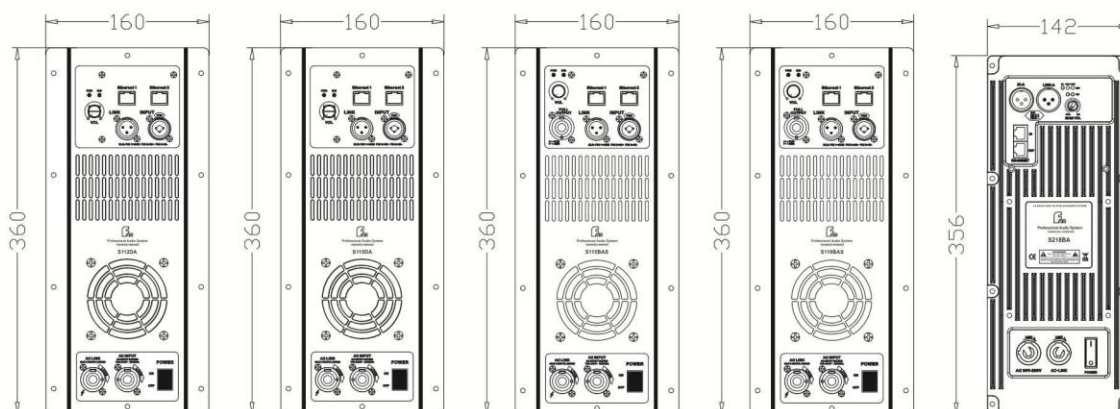S115H

S215

S115B/S115BAS

S118B/S118BAS

S218B/S218BA

S112DA
S115DA
S115BAS
S118BAS
S218BA