

TH23V

2-STROKE FORCED AIR COOLED
ELECTRONIC IGNITION

22.5cm³, 1.0kW (1.3Hp) / 7000rpm




GENERAL SPECIFICATIONS

Engine Type	Forced air cooled 2-stroke, vertical shaft, gasoline engine
Number of Cylinder	1
Bore x Stroke	32 x 28mm (1.26 x 1.10in.)
Piston Displacement	22.5cm ³ (1.4cu.in.)
Max.Horse Power	1.0kW (1.3Hp) / 7000rpm
Direction of Rotation	Counter-clockwise facing the PTO shaft
Fuel	Mixed fuel of gasoline and 2-stroke oil (Ratio 50 : 1)
Fuel Tank Capacity	0.5litre (0.5US.qt.)
Min. Fuel Consumption Ratio	659gr / kW-hr (458gr / Hp-hr) / 6500rpm
Carburetor	WALBRO WYB
Ignition	Solid state ignition (None breaker)
Plug	NGK BPMR6A
Starter	Recoil starter
Lubrication	Fuel mixture
Air Filter	Dry type (Polyurethane form element)
Net Weight	2.0kg (4.4lbs) without throttle cable and lever
Dimension (L x W x H)	228 x 212 x 151mm (8.98 x 8.35 x 5.94in.)

Specifications subject to change without notice.

PERFORMANCE CURVES

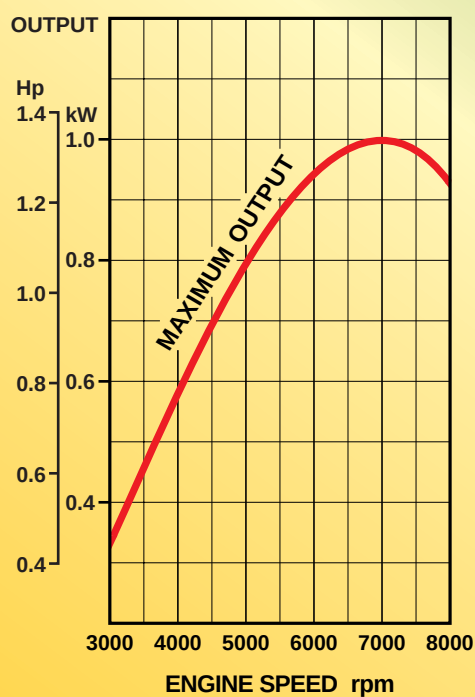

Kawasaki
Let the good times roll.

Unit : mm (in.)

