

Watertight Boxes

Junction Boxes With Cable Gland – Press On Lid



CODE	TYPE	DIMENSIONS mm	COLOR	U.M.	PACKAGING (Box)
32-21001-653	65x35	Ø 65x35	GRAY	PCS	60
32-21020-653	65x35	Ø 65x35	WHITE	PCS	60
32-21002-804	80x40	Ø 80x40	GRAY	PCS	60
32-21021-804	80x40	Ø 80x40	WHITE	PCS	60
32-21003-656	65x65	65x65x35	GRAY	PCS	60
32-21004-808	80x80	80x80x40	GRAY	PCS	60
32-21022-808	80x80 WHITE	80x80x40	WHITE	PCS	60

GENERAL DESCRIPTION

- Non-corrosive. Resistant to impact and pressure.
- Made of durable polymer material.
- Flame retardant. Self extinguishing. UV protection.


APPLICATIONS

- Outdoor and indoor residential and industrial installations.
- Motion installations – Equipment power supply – Lighting.
- Special design of side caps for easy cutting and installation of conduits - cables.
- Fits with: Racor, Spiral COMBO - DOMO - FORTE, Rigid COMBO - DOMO - FORTE, SiBi®, Courflex®.

PROPERTIES

Protection rating against solid bodies and water:	IP 54
Glow wire test:	850°C
Minimum temperature limit:	- 15°C
Maximum temperature limit:	+60°C

APPLICATION STANDARDS: IEC 60670 – 1/2002

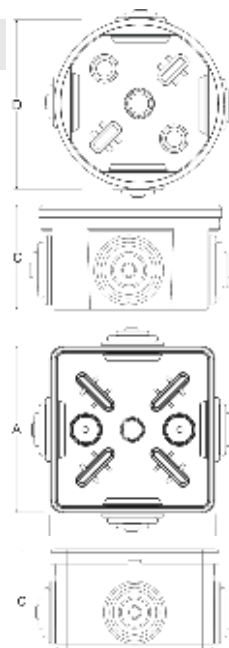

Junction Boxes With Cable Gland – PVC Fast Screw On Lid



CODE	TYPE	DIMENSIONS mm	COLOR	U.M.	PACKAGING (Box)
32-21009-100	100x100	100x100x50	GRAY	PCS	60
32-21023-100	100x100 WHITE	100x100x50	WHITE	PCS	60
32-21006-120	120x80	120x80x50	GRAY	PCS	50
32-21007-150	150x110	150x110x70	GRAY	PCS	24
32-21008-190	190x140	190x140x70	GRAY	PCS	24

GENERAL DESCRIPTION

- Non-corrosive. Resistant to impact and pressure.
- Made of durable polymer material.
- Flame retardant. Self extinguishing. UV protection.


APPLICATIONS

- Outdoor and indoor residential and industrial installations.
- Motion installations – Equipment power supply – Lighting.
- Special design of side caps for easy cutting and installation of conduits - cables.
- Fits with: Racor, Spiral COMBO - DOMO - FORTE, Rigid COMBO - DOMO - FORTE, SiBi®, Courflex®.

PROPERTIES

Protection rating against solid bodies and water:	IP 55
Glow wire test:	850°C
Minimum temperature limit:	- 15°C
Maximum temperature limit:	+60°C

APPLICATION STANDARDS: IEC 60670 – 1/2002



Junction Boxes With Knock Outs – Press On Lid



CODE	TYPE	DIMENSIONS mm	COLOR	U.M.	PACKAGING (Box)
32-21040-808	80x80	80X80X40	GRAY	PCS	60

GENERAL DESCRIPTION

- Non-corrosive. Resistant to impact and pressure.
- Made of durable polymer material.
- Flame retardant. Self extinguishing. UV protection.

APPLICATIONS

- Outdoor and indoor residential and industrial installations.
- Motion installations – Equipment power supply – Lighting.
- Special design of side caps for easy cutting and installation of conduits - cables.

PROPERTIES

Protection rating against solid bodies and water:	IP 54
Glow wire test:	850°C
Minimum temperature limit:	- 15°C
Maximum temperature limit:	+60°C

APPLICATION STANDARDS: IEC 60670 – 1/2002

Watertight Boxes

Junction Boxes With Knock Outs – PVC Fast Screw On Lid



CODE	TYPE	DIMENSIONS mm	COLOR	U.M.	PACKAGING (Box)
32-21041-100	100x100	100x100x50	GRAY	PCS	60
32-21042-120	120x80	120x80x50	GRAY	PCS	50
32-21043-150	150x110	150x110x70	GRAY	PCS	24
32-21044-190	190x145	190x145x70	GRAY	PCS	24

GENERAL DESCRIPTION

- Non-corrosive. Resistant to impact and pressure.
- Made of durable polymer material.
- Flame retardant. Self extinguishing. UV protection.

APPLICATIONS

- Outdoor and indoor residential and industrial installations.
- Motion installations – Equipment power supply – Lighting.
- Special design of side caps for easy cutting and installation of conduits - cables.
- Fits with: Racor, Spiral COMBO - DOMO - FORTE, Rigid COMBO - DOMO - FORTE, SiBi®, Courflex®.

PROPERTIES

Protection rating against solid bodies and water:	IP 55
Glow wire test:	850°C
Minimum temperature limit:	- 15°C
Maximum temperature limit:	+60°C

APPLICATION STANDARDS: IEC 60670 – 1/2002

Junction Boxes With Smooth Sides – PVC Fast Screw On Lid



CODE	TYPE	DIMENSIONS mm	COLOR	U.M.	PACKAGING (Box)
32-21030-190	190x145	190x145x70	GRAY	PCS	24
32-21031-245	245x190	245x190x90	GRAY	PCS	16
32-21032-300	300x215	300x215x125	GRAY	PCS	6
32-21033-380	380x300	380x300x125	GRAY	PCS	4

GENERAL DESCRIPTION

- Non-corrosive. Resistant to impact and pressure.
- Made of durable polymer material.
- Flame retardant. Self extinguishing. UV protection.

APPLICATIONS

- Outdoor and indoor residential and industrial installations.
- Motion installations – Equipment power supply – Lighting.
- Special design of side caps for easy cutting and installation of conduits - cables.
- Fits with: Racor, Spiral COMBO - DOMO - FORTE, Rigid COMBO - DOMO - FORTE, SiBi®, Courflex®.

PROPERTIES

Protection rating against solid bodies and water:	IP 65
Glow wire test:	850°C
Minimum temperature limit:	- 15°C
Maximum temperature limit:	+60°C

APPLICATION STANDARDS: IEC 60670 – 1/2002

