

APP HUNG PUMP GROUP

EFFLUENT PUMPS

Features:

- Non-clogging vortex impeller.
- Built-in thermal overload protector.
- Stainless steel motor housing.
- Passes solid diameter varies from 5 to 10 mm according to different horse power.
- High performance, low current and energy efficiency.


Applications:

- Pool or fish pond water circulation.
- Useful for rain water discharge.
- Waterfall, fountain and garden spraying.
- Sump pit, waste water drainage.
- Utilities for dewatering.

BAS-Series




PERFORMANCE

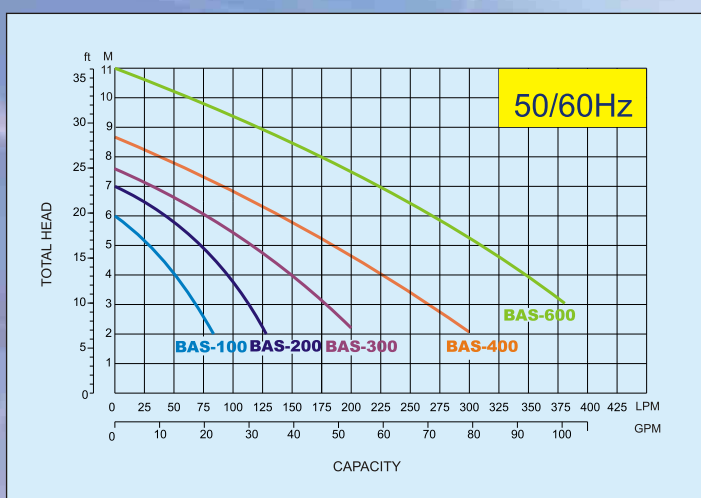

BAS Series



CONSTRUCTION

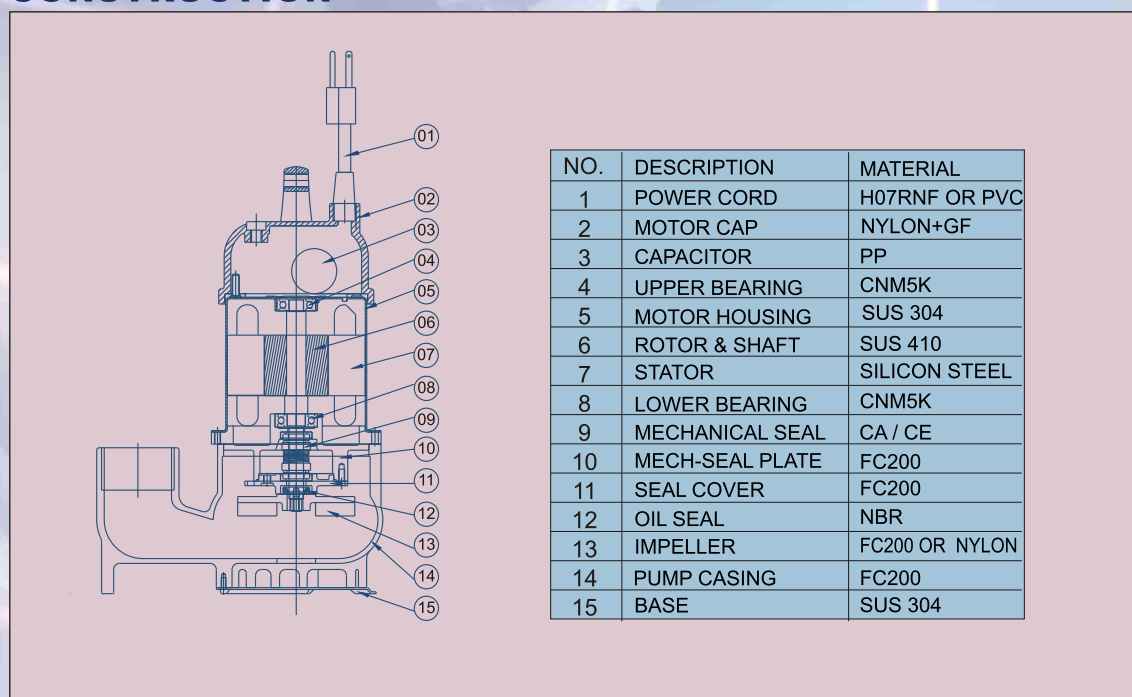

SPECIFICATION

Type	Output		Discharge		Rated		Maximum		Weight	Dimension		
					Head	Capacity	Head	Capacity				
	HP	W	mm	Inch	M	LPM	M	LPM		Kg	L(mm)	W(mm)
BAS-100	1/6HP	100	25	1"	3.5	60	6	80	5.5	190	130	280
BAS-200	1/4HP	200	32	1-1/4"	4	100	7	130	6.0	190	130	280
BAS-300	1/3HP	250	40	1-1/2"	4.5	130	8	200	6.5	200	135	285
BAS-400	1/2HP	375	50	2"	5	180	9	300	10.5	236	145	352
BAS-600	3/4HP	550	50	2"	6	250	11	380	12	276	165	425

Remark: BAS-100A/200A/300A/400A are equipped with float switch.



Hung Pump Group

16 Lien-Ming Street, Ba-De City 334 ,
Taoyuan, Taiwan
TEL:(886) -3-371-3969
FAX:(886) -3-371-3960
E-Mail: hungpump@ms9.hinet.net