


OVERVIEW

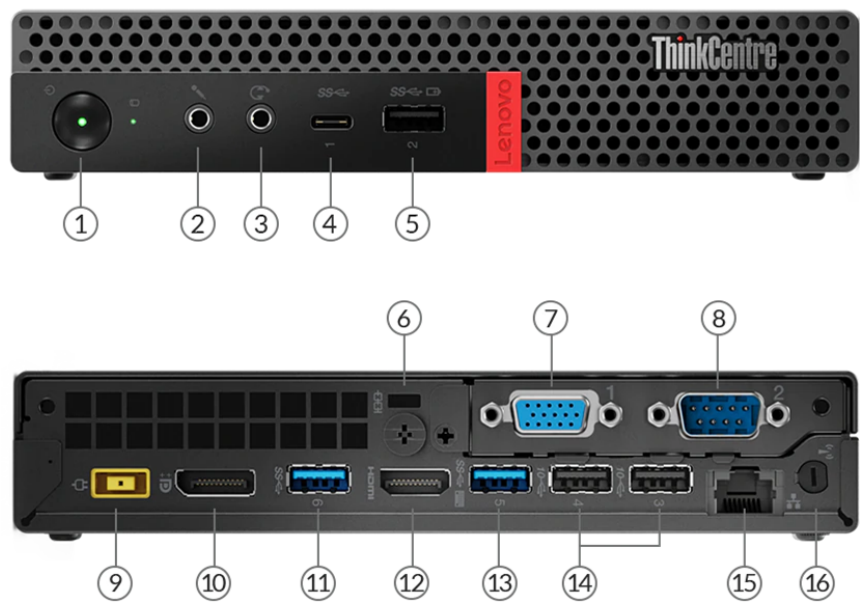

1. Power button	9. Power connector
2. Microphone (3.5mm)	10. DisplayPort
3. Headphone / microphone combo jack (3.5mm)	11. USB 3.1 Gen 1
4. USB-C 3.1 Gen 1	12. HDMI
5. USB 3.1 Gen 1	13. USB 3.1 Gen 1
6. Kensington Security Slot	14. 2x USB 3.1 Gen 2
7. Optional port 1 (VGA is shown) *	15. Ethernet (RJ-45)
8. Optional port 2 (serial is shown) *	16. Wi-Fi antenna *

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, 8th Generation Intel Core™ i3 / i5 / i7 Processor, or 9th Generation Intel Core i3 / i5 / i7 / i9 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G4900T	2	2	2.9GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4930T	2	2	3.0GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5400T	2	4	3.1GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5420T	2	4	3.2GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5500T	2	4	3.2GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Pentium Gold G5600T	2	4	3.3GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8100T	4	4	3.1GHz	-	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8300T	4	4	3.2GHz	-	8MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9100T	4	4	3.1GHz	3.7GHz	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9300T	4	4	3.2GHz	3.8GHz	8MB	DDR4-2400	Intel UHD Graphics 630
Core i5-8400T	6	6	1.7GHz	3.3GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8500T	6	6	2.1GHz	3.5GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8600T	6	6	2.3GHz	3.7GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9400T	6	6	1.8GHz	3.4GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9500T	6	6	2.2GHz	3.7GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9600T	6	6	2.3GHz	3.9GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i7-8700T	6	12	2.4GHz	4.0GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-9700T	8	8	2.0GHz	4.3GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i9-9900T	8	16	2.1GHz	4.4GHz	16MB	DDR4-2666	Intel UHD Graphics 630

Operating System

Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

Graphics

Graphics^[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 610	Integrated	Shared	1x HDMI®, 1x DP, 1x optional video port (2nd HDMI, VGA, 2nd DP, or USB-C)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX® 12
Intel UHD graphics 630	Integrated	Shared	1x HDMI, 1x DP, 1x optional video port (2nd HDMI, VGA, 2nd DP, or USB-C)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX 12

Notes:

1. Integrated graphics information and onboard video ports information are not applicable for all models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Monitor Support

Supports up to 3 independent displays via onboard ports (DisplayPort™ + HDMI + 1x optional port [VGA / 2nd DP / 2nd HDMI / USB-C])

Chipset

Chipset

Intel Q370 chipset

Memory

Memory Type^[1]

DDR4-2666

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Protection

Non-ECC

Max Memory^[2]

Up to 32GB DDR4-2666

Notes:

1. System automatically clocks down for the processors with lower memory controller

2. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support

Up to two drives, 1x 2.5" HDD/SSD + 1x M.2 2242/2280 SSD

- 2.5" HDD up to 1TB
- 2.5" SSD up to 256GB
- M.2 SSD up to 1TB
- Optional Intel Optane™ Memory, M.2

RAID

Not support

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
2.5" SATA HDD	SATA 6Gb/s	5.4K	-

2.5" SATA SSD	SATA 6Gb/s	-	-
2.5" SATA SSD	SATA 6Gb/s	-	Opal
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal
Intel Optane Memory M10	PCIe NVMe, PCIe 3.0 x2	-	-

Removable Storage

Optical

- DVD-ROM, slim (9.0mm), via USB external ODD box
- DVD burner (DVD±RW), slim (9.0mm), via USB external ODD box
- None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB2 codec

Speakers

- Single speaker, 1.5W x1
- Single speaker, 2W x1

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
65W	Adapter	88%	Autosensing
90W	Adapter	88%	Autosensing
135W	Adapter	88%	Autosensing
No power supply	-	-	-

DESIGN

Input Device

Keyboard

- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse

- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Calliope Mouse (USB connector), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)

Models	Dimensions
Tiny only	179 x 183 x 34.5 / 37 mm with rubber feet (7.05 x 7.2 x 1.36 / 1.5 inches with rubber feet)
With VESA mount & ODD box	188.4 x 185.38 x 63 mm (7.42 x 7.30 x 2.48 inches)

Weight

Models	Weight
Tiny Only	1.32 kg (2.91 lbs)
With VESA mount & ODD box	1.66 kg (3.66 lbs)

Case Color

Black

Bays^[1]

1x 2.5" disk bay

Expansion Slots^[2]

- One PCIe 3.0 x8, low-profile
- Two M.2 slots (one for WLAN, one for SSD)

EOU

(Optional) Toolless chassis open (Toolless Chassis Screw required) and toolless M.2 SSD, HDD, memory assembly / removal

Stand

- Vertical stand
- No stand

Mounting

- VESA mount bracket kit, supports VESA 75mm and 100mm
- Not configured

Others

- (Optional) Dust Filter
- (Optional) Power adapter cage

Notes:

1. 2.5" HDD/SSD and PCIe card are mutually exclusive
2. 2.5" HDD/SSD and PCIe card are mutually exclusive

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ45, supports Wake-on-LAN

Optional Ethernet

- Gigabit Ethernet, Intel Ethernet Server Adapter I350-T4, 4x RJ-45, PCIe x4
- No optional Ethernet

WLAN + Bluetooth™

- Realtek RTL8821CE, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 4.2, M.2 card
- Realtek RTL8822BE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 card
- Intel Dual Band Wireless-AC 3165, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 4.2, M.2 Card
- Intel Dual Band Wireless-AC 8265, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 Card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, Intel vPro technology support, M.2 card
- No WLAN and Bluetooth

Ports^[1]**Front Ports**

- 1x USB 3.1 Gen 1 (Always On and fast charge)
- 1x USB-C 3.1 Gen 1
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Rear Ports^[2]

- 2x USB 3.1 Gen 1
- 2x USB 3.1 Gen 2
- 1x Ethernet (RJ-45)
- 1x HDMI
- 1x DisplayPort

Optional Rear Ports

- Optional Port 1 (VGA / 2nd DisplayPort / 2nd HDMI / serial / USB-C 3.1 Gen 1 with DisplayPort function, select one)
- Optional Port 2 (serial)
- 2x USB 3.1 Gen 1 (via 2-port USB expansion card, PCIe x1)
- 1x Thunderbolt™ 3 (combo USB-C 3.1 Gen 2 / DisplayPort, via Thunderbolt expansion card, PCIe x4)
- 4x serial (via 4-port serial expansion card, PCIe x1)
- 1x parallel (USB to parallel dongle)
- 2x PS/2 (USB to 2x PS/2 dongle)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

Monitor Cable**Monitor Cable**

- VGA Cable Tiny
- DP to VGA dongle
- DP to dual DP dongle
- HDMI to VGA Dongle
- DP to DVI-D dongle
- DP to HDMI 1.4 dongle
- DP to VGA Cable (1.5M)
- No monitor cable

SECURITY & PRIVACY**Security****Security Chip**

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot

Chassis Intrusion Switch

Chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

BIOS Security

- Power-on password
- Administrator password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY**System Management****System Management^[1]**

- Intel vPro with Intel AMT 12.0
- None

Notes:

1. Require choosing a vPro-support Wi-Fi adapter to enable vPro function through wireless connection

SERVICE

Warranty

Base Warranty

- 1-year depot service
- 1-year limited onsite service
- 3-year depot service
- 3-year limited onsite service
- 3-year split limited onsite service
- No base warranty

CERTIFICATIONS

Green Certifications

Green Certifications

- (Optional) EPEAT™ Gold
- (Optional) EPEAT Silver
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO
- RoHS compliant

Other Certifications

Other Certifications

- (Optional) TÜV Low Noise certified
- None

Mil-Spec Test

MIL-STD-810G military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

