

Mini / data sheet



THE MINI STANDARD COMBINATION IS MADE UP OF:

11 SOLID WOOD SHAPED TREADS

11 STEEL SUPPORTS


RAILING WITH VERTICAL BALUSTERS FOR THE INTERNAL SIDE

Table 1

				SUPPLEMENTARY ITEMS	
	STAIRCASE HEIGHT	TREADS	RISES	TREADS	HANDRAILS
INCREASES	cm 266 - cm 329	13	14	+ 2	+ 1
	cm 247 - cm 305,5	12	13	+ 1	+ 1
STANDARD	cm 228 - cm 282	11	12	11 SHAPED TREADS + 11 SUPPORTS + RAILING WITH VERTICAL BALUSTERS FOR THE INTERNAL SIDE	
REDUCTIONS	cm 209 - cm 258,5	10	11	-	-



ADJUSTABLE RISES FROM 19 TO 23,5 CM

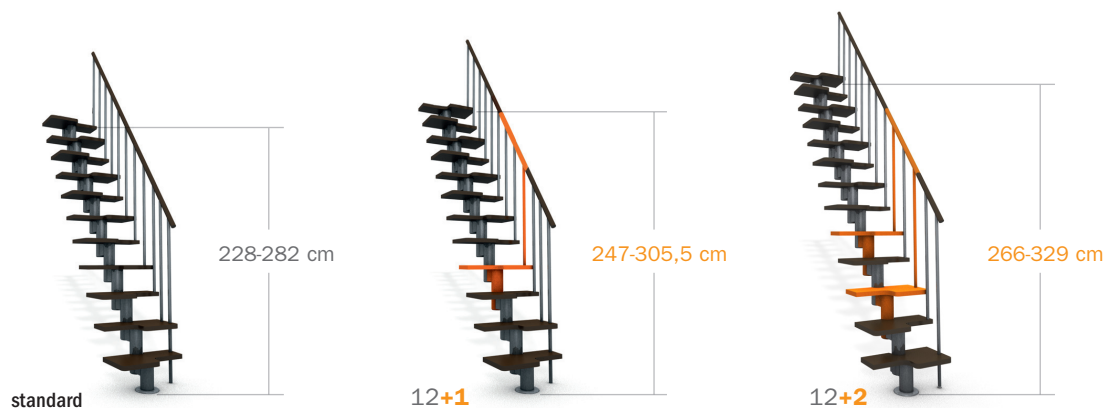

SUPPLEMENTARY ITEMS




SUPPLEMENTARY BALUSTRADE

It is necessary to protect the upper floor aperture (fig. 1). It comes in 120 cm scalable modules comprising 10 balusters, handrail and fixings.

TYPES OF OPENINGS AND BALUSTRADES

no opening

fig. 1

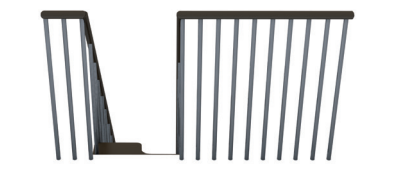

SUPPLEMENTARY TREADS / HANDRAILS

To reach a staircase height of 329 cm, you must purchase one or more supplementary treads comprising the structure, tread and balusters. Supplementary handrail modules (Table 1) must be purchased for certain configurations.


RISER BAR

Allows to reduce the space between treads to prevent children from falling.



EXTERNAL RAILING

The supplementary external railing, which is made up of 12 balusters, handrail and fixings, is used as protection if the external side of the staircase is distant from the wall.

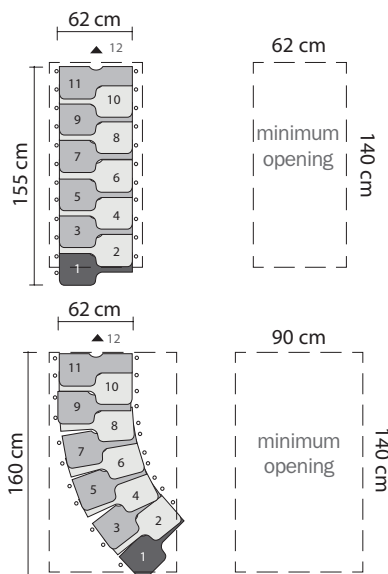

ROTATION

clockwise

anti-clockwise



CHILD PROTECTION GATE

Kalypto is a safety accessory to prevent children younger than 24 months from climbing up and down the stairs on their own. It is made up of a sheet stretched over a rigid tubular frame and plastic joints to fasten the gate to the railing. It is 82 cm long and 73,5 cm high and can be shortened up to 54 cm to adapt to all staircase sizes. Suitable for indoor use.

Optional (a):

The optional wall fastening allows you to install Kalypto in doorways, corridors or if the staircase's balusters are not suitable for its installation.

