

V-GSN680/BT



General Purpose Gun-type Linear Imager Bar Code Scanner



Introduction

V-GSN680/V-GSN680BT is a brand new general purpose gun type linear imager bar code scanner which is designed especially for retail market. We include friendly functions and with replaceable multi-interface cable options that makes it more easily to be operated by the customers to accommodate it to user's environment and a stand option can be ordered to facilitate hand-free reading option.

V-GSN680BT supports Class1 Bluetooth V2.0 EDR technology with transmission range up to 100m/328.08 ft. in line of open sight, supports both SPP and HID profiles can easily pair up with other Bluetooth V2.1 compatible mobile equipments or systems.


With its auto-shuttle-emulation alike smart detection, offers superior decoding performance on a reading speed up to 500 scans per second and up to 500mm reading depth for the majority of 1D bar codes and GS1 DataBar™ codes.

In short, V-GSN680/V-GSN680BT is a high performance scanner which provides customers with the most cost-effective solution in the market. It is perfectly suitable and definitely the best choice for any retail and logistic environment.

Features

- Support major 1D codes, GS1 Databar linear and stacked Codes.
- Automatic detect reading mode.
- Reading distance up to 50cm (20mil/0.5mm@code39 pcs90%).
- Smart detection, reading speed up to 500 scans per second.
- 4 in 1 Combo interface that changes interface by replacing cable.
- Equipped with Bluetooth V2.1 Class 1 technology, range up to 100m in open space.
- Supports both SPP and HID profiles can easily pair up with other Bluetooth V2.1 compatible mobile equipments or systems.
- Support Batch transmission mode, memory capacity stores up to 30,000 inputs of EAN13 barcodes.

V-GSN680/BT

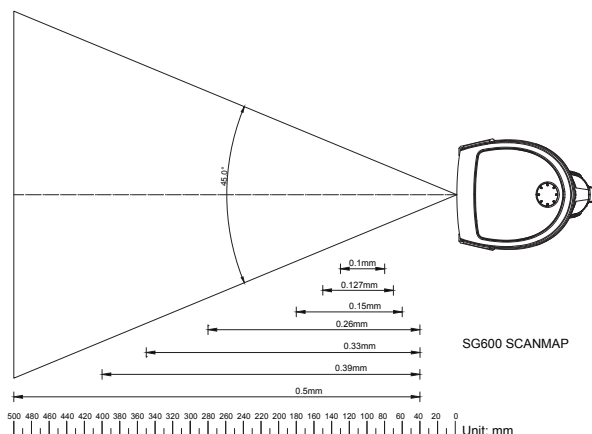

Specifications

Physical Characteristics

V-GSN680

Body weight	Approx. 110g / 3.88oz
Material	ABS / Rubber
Cable Length	5FT. (150cm)
Connector	RJ 45C 10Pins
Dimension	71.13mm(W) x 62.61mm(H) x 169.27mm(L)

SG600 Stand (Option)

Dimension	160.0mm X 100.0mm X 204.4 mm
-----------	------------------------------

V-GSN680BT


Scanner weight	Approx. 175g / 6.17oz(incl. Battery)
Dimension	71.13mm(W) x 62.61mm(H) x 169.27mm(L)
Cradle weight	Approx. 150g
Dimension	112.18mm(W) x 84.64mm(H) x 130.6mm(L)

Performance

Light Source	Visible Red light 635nm LED
Sensor	Linear CCD Sensor
Processor Type	ARM Cortex™-M3, 32-bit
Operating Freq.	8 MHz
Scan Speed	Smart detection, up to 500 scans per second
Depth of Field	Up to 500mm@20mil/0.5mm, PCS90%
Print Contrast Ratio	PCS30%
Minimum Resolution	4mil/0.1mm@PCS90%
Reading Angle	Test Conditions: Code 39, 10mil/0.25mm, PCS 90% Pitch: $\pm 10^\circ \sim 65^\circ (\pm 5^\circ)$ Skew: $\pm 60^\circ (\pm 5^\circ)$
Ambient Light	100,000 Lux Max.

Environmental

Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Relative Humidity	20% to 95% (Non-condensing)

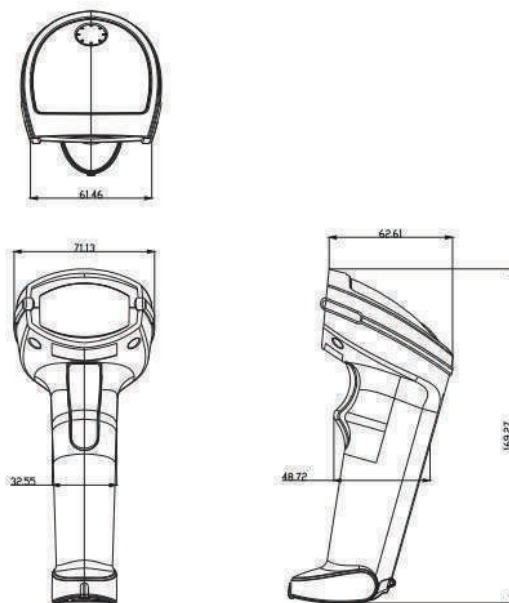

Electrical Characteristics

V-GSN680 Scanner

Voltage	DC 5V
Power Consumption Operation	150mA, stand-by: 50mA

V-GSN680BT Scanner

Voltage Battery	Li-Ion 3.7V/2600 mAh
Charge Time	Approx. 5 hours
Reads per Charge	50,000 Times
Power Consumption Operation	200mA, stand-by: 50mA

V-GSN680BT Cradle

Voltage	DC 5V
Operation Consumption	70mA

Radio Characteristics

Bluetooth Module	Bluetooth V2.1 EDR
Frequency Band	2.402GHz ~ 2.480GHz
Transmission Range	Up to 100M(328.08FT.) line of sight
RF Output Power	Class 1 (under 20dBm)

Reliability

MTBF(Calculated) V-GSN680	50,000 hours minimum
V-GSN680BT	40,000 hours minimum
Cable Bending Test	30 times/min @ 500g/90°
Drop	59.05 inches.(150cm) drop on concrete surface

Readable Symbolologies

All UPC/EAN/JAN, EAN128 Code, Code 39, Code 39 Full ASCII Code32 / Italian Pharmacy, Code 128, CODABAR/NW7 Interleave 25, Industrial 25, Matrix 25, MSI/PLESSEY, Telepen Code 93, Code 11, China Postage, Code 26, LCD25, GS1 DataBar

Due to Senortech's continuing product improvement programs, specifications and features are subject to change without notice.

SENIOR



פרטים ליצירת קשר:
1-700-500-717
info@zbm.co.il
העליה השלישית 9, רמת גן
יוסי בן יעוזר 21 ירושלים

<https://www.zbm.co.il>