

SUL 181 d

Item no.: 1810011

theben

Time and light control Analogue time switches

Description

- Analogue time switch
- 1 channel
- Daily program
- With power reserve (NiMH rechargeable battery)
- 96 switching segments
- Quartz controlled
- Shortest switching time: 15 minutes
- Clock hands for time display and in addition 12/24 hour recognition
- Simple summer/winter time correction
- Time can be changed clockwise or anti-clockwise
- DuoFix spring terminals
- For 2 conductors each
- Wire or strand (with or without wire end sleeve)
- Wire diameter: 0.5 - 2.5 mm²
- Button for releasing plug-in connection
- Switching preselection
- Manual switch with 3 positions: Continuous ON/AUTO/continuous OFF
- Switching status display



Technical data

SUL 181 d	
Operating voltage	110 – 230 V AC
Frequency	50 – 60 Hz
Number of channels	1
Width	3 modules
Installation type	DIN rail
Type of connection	DuoFix spring terminals
Drive	Quartz-controlled stepper motor
Program	Daily program
Power reserve	3 days approx. 1.5 days at 110 V
Switching capacity at 250 V AC, cos φ = 1	16 A

SUL 181 d	
Switching capacity at 250 V AC, cos φ = 0,6	4 A
Incandescent/halogen lamp load	1100 W
LED lamp < 2 W	20 W
LED lamp 2-8 W	180 W
LED lamp > 8 W	180 W
Shortest switching times	15 min
Programmable every	15 min
Time accuracy at 25 °C	≤ ± 1 s/day (quartz)
Type of contact	Changeover contact

Subject to technical changes and misprints

additional information at: www.theben.de/product/1810011

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

SUL 181 d

Item no.: 1810011




Technical data

SUL 181 d	
Switching output	Potential-free and phase-independent
Number of switching segments	96
Stand-by consumption	~0.5 W
Capacity loss max.	1.3 W
Test approval	VDE

SUL 181 d	
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Type of protection	IP 20
Protection class	II according to EN 60 730-1
Ambient temperature	-20°C ... 55°C

Connection example




Subject to technical changes and misprints

additional information at: www.theben.de/product/1810011

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

Scale drawings

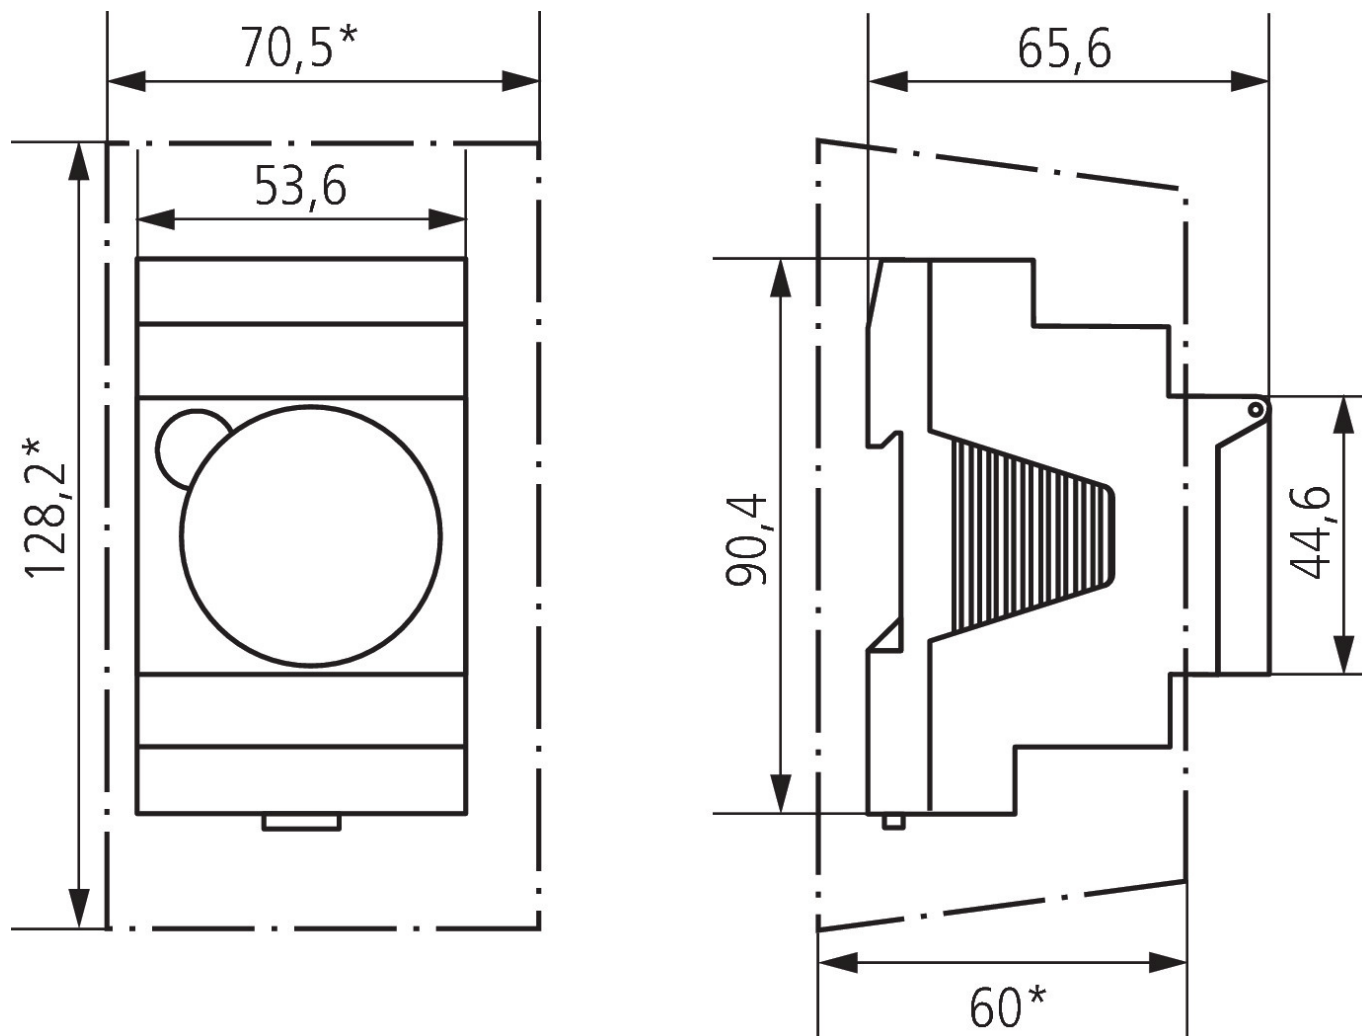

Accessories

Wall mounting kit 52,5 mm
Item no.: 9070050

Front panel kit
Item no.: 9070001



Subject to technical changes and misprints

additional information at: www.theben.de/product/1810011

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.