



Your Efficient 3-in-1 Mono Laser Printer

**Easy to set up and connect with fast
flawless printing**

DCP-L2620DW



PRINT



SCAN



COPY



5GHz
WIRELESS

www.brother.eu

Your Efficient 3-in-1 Mono Laser Printer

Work smarter from anywhere at home or in the office with the easily connected Brother DCP-L2620DW. Hosting a range of efficiency-boosting features, this 3-in-1 mono laser printer saves you time with fast flawless printing and scan, automatic 2-sided print, and a generous paper tray capacity.

Get set up with ease and download the Brother Mobile Connect App, enabling you to print and scan from virtually anywhere.

DCP-L2620DW



Key features:

- Print up to 32 pages per minute
- 2-Sided print, up to 16 sides per minute
- 2 Line LCD control panel
- 5GHz WiFi and USB
- 128MB Internal memory
- 250 Sheet paper input tray¹¹
- Comes with 700 page yield toner, 3,000 maximum yield available⁷

Work smarter

The DCP-L2620DW is designed to increase efficiency, with fast print speeds helping you to work smarter. The 2-sided print feature saves you time, enabling you to get on with other tasks. Scan your documents in colour or mono and send directly to your desktop or mobile device.

Effortless

Make your day easier and your printing effortless, with simple set up and 5GHz WiFi or USB connection. This efficient DCP-L2620DW is a breeze to operate using the easy to navigate control panel.

The perfect partner

High quality print technology ensures that your output is flawless and professional every time. The expertly designed DCP-L2620DW has a high capacity paper input and output tray allowing you to print for longer, while the compact and quiet form enables you to work without interruption in smaller workspaces.

Print longer

The DCP-L2620DW keeps your printing costs down using a separate drum and toner unit, and the 700 pages⁷ inbox toner supporting your higher print volume needs. Toner is easy to change and high yield toner is available, printing up to 3,000 pages⁷, reducing your cost per page and frequency to replace.

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The DCP-L2620DW provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

Print from anywhere



With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print and scan documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.

Download the app on your mobile device to get started.



The automated toner subscription for your printer


Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.



TO FIND OUT MORE

Download the Brother Mobile Connect app or visit the website: brother.co.uk/decopro

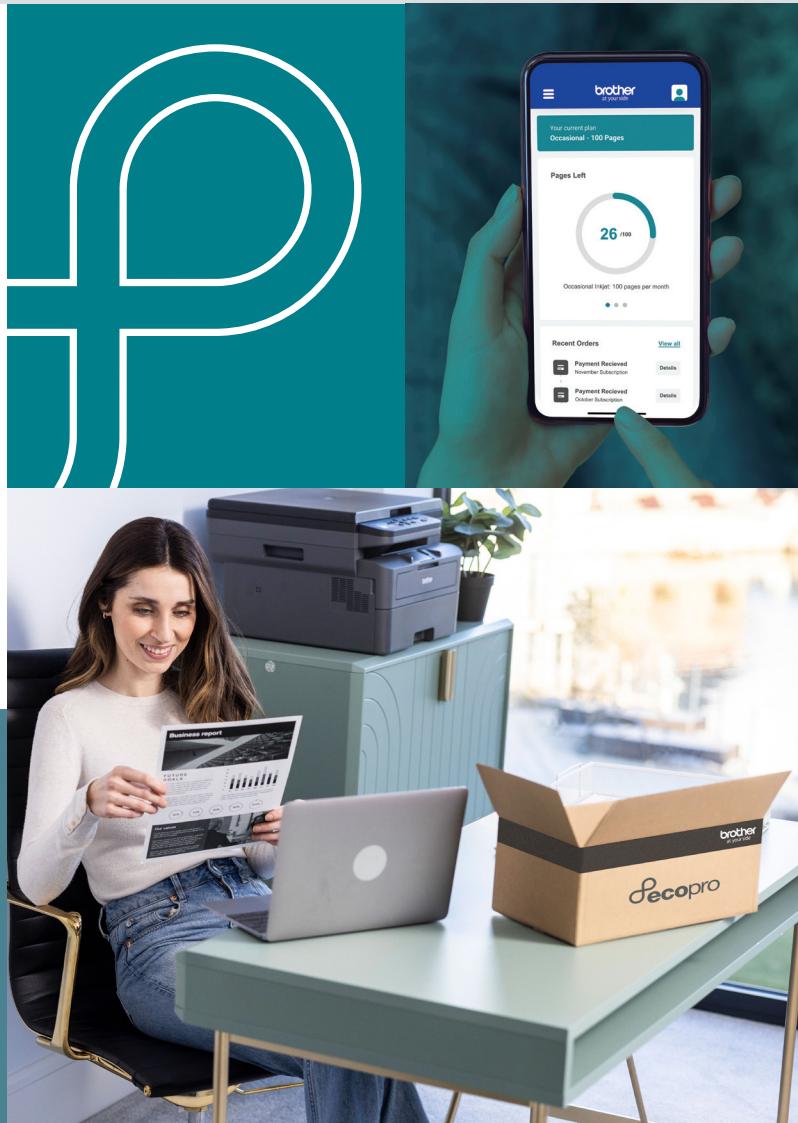

General

Technology
Electrophotographic Laser

Local Interface
Hi-Speed USB 2.0

Wireless Network
2.4GHz and 5GHz Support

Memory
128MB

Control panel
2 Line LCD with keys

Carton Contents
Device, Inbox Toner, Drum, Power Supply Cord, Quick Set-Up Guide, Warranty Card

Print

Print Speed (A4)
1-Sided: 32ppm Mono
2-Sided: 16 sides per minute Mono

Quiet Mode
A mode to reduce the printing noise

Resolution
Up to 1200 x 1200dpi

**FPOT
(First Print Out Time)**
Up to 8.5 Seconds Mono

Printer Functions

N-up Printing
Reduce up to 25 pages into a single page

Print Profiles
Store your favourite driver settings as profiles to easily recall them

Print Complete Notice
A printing notification can be set to go to your computer (Network only)

Poster Printing
Enlarge a single page into a poster using 2x2, 3x3, 4x4 or 5x5 pages

Manual 2-Sided Print
Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)

Toner Save Mode
Use the Toner Save Mode to reduce toner consumption without affecting print speed

Reverse Print
Rotate the content of a printed document by 180°

Watermark Printing
Watermark your documents with predefined text, custom logo or custom messages

ID Printing
Add identification to your printed documents (date and time, short custom message or PC username)

Booklet Printing
Print documents in A5 booklet format using automatic or manual 2-sided print

Printer Driver

Windows
Windows 11
(32 and 64 bit editions)
and more

macOS

Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux
CUPS, LPD/LPRng
(x86/x64 environment)

ChromeOS
Supports native
ChromeOS printing

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper Handling¹¹

Paper Input Standard Tray

250 Sheets

Manual Feed Slot

1 Sheet

Paper Output

120 Sheets A4

Envelope Printing

Yes from manual feed slot

Media Sizes

Standard Tray

A4, Letter, B5(JIS), B5(ISO),
A5, A5(Long Edge), B6(JIS),
A6, Executive, A4 Short,
16K(195x270mm)

Manual Feed Slot

Width 76.2 to 215.9 mm,
Length 127 to 355.6 mm
Envelope: COM-10, DL, C5,
Monarch

Scanner Glass

Up to A4/LTR

Auto 2-Sided

A4

Media Type and Weights

Standard Tray

Plain Paper, Thin Paper,
Recycled Paper,
Thick Paper
60-163gsm

Manual Feed Slot

Plain Paper, Thin Paper, Thick
Paper, Thicker Paper, Recycled
Paper, Bond, Label, Envelope,
Env. Thin, Env. Thick
60-230gsm

Auto 2-Sided

Plain Paper, Thin Paper,
Recycled Paper
64-105gsm

Mobile and Web Connectivity

Brother Mobile Connect¹⁷ (Android)

Print from, scan to, preview
copies and check the machine
status from an Android device

Brother Mobile Connect¹⁷ (iPad / iPhone)

Print from, scan to, preview
copies and check the machine
status from an iPad / iPhone

Apple AirPrint¹⁷

Print from and scan to most
common file types from any
AirPrint enabled application

Brother Print Service Plugin¹⁷

Print from an Android devices
without a dedicated App.

Mopria™¹⁷

Print most common file types
from Mopria™ supported
Android devices

Copy

Copy Speed (A4)
1-Sided: 32ppm Mono

Resolution
Up to 600 x 600dpi

FCOT
(First Copy Out Time)
Up to 10 Seconds Mono

Grey Scale
256 shades of grey
(8 bit for each colour)

Copy Functions

Multi-Copying/Stack/Sort
Makes up to 99 copies of each page / Stacks or Sorts

Enlargement/Reduction Ratio
Reduce or Increase document sizes from 25% to 400% in 1% increments

N in 1 Copying
Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

Scanner Type
CIS (Contact Image Sensor)

Colour and Mono Scanning
Yes

Scan Resolution from Scanner Glass
1200 x 1200dpi

Interpolated Scan Resolution
Brother Scanner Utility enhances up to 19,200 x 19,200 dpi

Colour Depth
30 bit colour Processing (Input)
24 bit colour Processing (Output)

Grey Scale
10 bit colour Processing (Input)
8 bit colour Processing (Output)

Scanner Functions

Supported File Formats
Including PDF (PDF/A, Secure PDF, Signed PDF, Searchable¹⁷) JPEG, TIFF

Standard Functions¹⁷
Scan to E-mail, OCR, Image, File

Network Scanning¹⁶
Scan to SharePoint
(iPrint&Scan for Windows only)

Scan To Microsoft Office
Scan to Word (.docx),
PowerPoint (.pptx), Excel (.xlsx)
for Microsoft Office

Scanner Drivers

Windows
TWAIN and WIA
Windows 11
(32 and 64 bit editions)

macOS
Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux
SANE (32 and 64 bit editions)

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

ChromeOS
Supports native ChromeOS scanning

Fleet Management Tools

BRAdmin^{16,17}
LAN/WAN management software

Embedded Web Server
Web based print management software embedded onto the device

Status Monitor¹⁶
Monitor the status of your machine from your computer

Driver Deployment Wizard^{16,17}

Easily create print drivers for hassle free deployment over your network

Software

Brother iPrint&Scan Desktop^{15,17}
Print from, scan to, preview copies and check the machine status from Windows or macOS PC

PaperPort SE 14^{16,17}
Document management and sharing program from KOFAX

Easy Setup
Simple access to drivers and software for the installation of your Brother machine from support.brother.com

Utilities
Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

Connectivity

Wireless Network
2.4GHz: IEEE 802.11 b/g/n (Infrastructure Mode)
IEEE 802.11 g/n (Wi-Fi Direct)

5GHz: IEEE 802.11 a/n (Infrastructure Mode)
IEEE 802.11 a/n (Wi-Fi Direct)

Wi-Fi Direct®
Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Mobile
Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Wireless Setup Support
Wi-Fi Protected Setup (WPS)

Local Interface
Hi-Speed USB 2.0

Wireless Applications
Vertical Pairing

Security Features

Wireless Network Security

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES)
*Wi-Fi Direct supports WPA2-PSK (AES) only.

SMTP-AUTH, SSL/TLS (SMTP, HTTP, IPP, FTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, SMTP Client, IPP/IPPS, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/Scan), SNTP Client

IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, SMTP Client, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, Web Services (Print/Scan), SNTP Client

IP Filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail Reports

Receive usage reports on a regular basis via e-mail

Automatic Intrusion Detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware Updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud Secure Print

Enables password protected driverless print job release

Certificate Management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public cerificate & private key for protected network communication

Digitally-signed Firmware

The firmware for Brother print and scan devices is digitally signed and secure

Port-based Network Access Control

(IEEE 802.1x)
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Supplies and Consumables

Inbox Toner⁷
1 x 700 pages (BK)

Standard Yield Toner⁷
TN2510 - 1,200 pages

High Yield Toner⁷
TN2510XL - 3,000 pages

Drum Unit
DR2510 Approx 15,000 pages
at 1 pages per job

Dimensions and Weights

With Carton (WxDxH)
580 x 517 x 434mm - 12.60kg

Without Carton (WxDxH)
410 x 399 x 272mm - 10.10kg

Duty Cycle

Recommended Monthly
Up to 2,000 pages

Operating Environment

Power Requirement
220-240V
AC 50/60Hz

Operating Environment
Humidity 20 - 80 %
10°C - 32.5°C
50°F - 90.5°F

Storage Environment
Humidity 35 - 85 %
0°C - 40°C
32°F - 104°F

Environment

Approx Power Consumption^{13,23}
Copying: 480W
Copying in quiet mode: 280W
Printing: 470W
Printing in quiet mode: 270W
Ready: 43W
Sleep: 4.1W
Deep Sleep: 0.6W
Power Off: 0.08W

TEC Value
0.39 kWh/week

Sound Power¹²
Printing: 6.63B(A)
Ready: Inaudible
Quiet Mode: 6.12B(A)
Deep Sleep: Inaudible

Sound Pressure¹²
PC Printing (Mono):
Approx. 49.0dB(A)
Ready: 30.0db(A)
Quiet Mode: 44.0db(A)

Toner Save
This reduces the toner consumption to get more pages from your consumables

Blue Angel
Yes

GS Mark
Yes

Nordic Swan
Yes

7 Approx. declared yield value in accordance with ISO/IEC 19752
 11 Capacity calculated with 80gsm paper
 12 Sound pressure and sound power level in accordance with ISO 7779
 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
 15 Windows and macOS only
 16 Windows only
 17 Optional download
 18 Requires an Internet connection
 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Compatible with Brother's EcoPro toner subscription



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

brother
at your side