



Your Efficient 3-in-1 Mono Laser Printer

**Easy to set up and connect with fast
flawless printing**

DCP-L2660DW



PRINT



SCAN



COPY



5GHz

www.brother.eu

Your Efficient 3-in-1 Mono Laser Printer

Work smarter from anywhere at home or in the office with the easily connected Brother DCP-L2660DW. Hosting a range of efficiency-boosting features, this 3-in-1 mono laser printer saves you time with fast flawless printing and quick scan speeds, automatic 2-sided print, a generous paper tray capacity and large automatic document feeder.

Get set up with ease and download the Brother Mobile Connect App, enabling you to print and scan from virtually anywhere.

DCP-L2660DW



Key features:

- Print up to 34 pages per minute
- 2-Sided print, up to 16 sides per minute
- Scan up to 22.5 images per minute³
- 6.8cm Colour touchscreen
- Fast ethernet, 5GHz WiFi and USB
- 256MB Internal memory
- 50 Sheet Automatic Document Feeder (ADF)¹¹
- 250 Sheet paper input tray¹¹
- Comes with 1,200 page yield toner, 3,000 maximum yield available⁷

Work smarter

The DCP-L2660DW is designed to increase efficiency, with fast print speeds helping you to work smarter. The Automatic Document Feeder and 2-sided print feature save you time, enabling you to get on with other tasks. Scan your documents in colour or mono and send directly to your desktop or mobile device.

Effortless

Make your day easier and your printing effortless, with simple set up and fast ethernet, 5GHz WiFi or USB connection. This efficient DCP-L2660DW is a breeze to operate using the easy to navigate menu on the 6.8cm colour touchscreen. Benefit from the ability to create custom shortcuts on the touchscreen for your most used functions.

The perfect partner

High quality print technology ensures that your output is flawless and professional every time. The expertly designed DCP-L2660DW has a high capacity paper input and output tray allowing you to print for longer, while the compact and quiet form enables you to work without interruption in smaller workspaces.

Print longer

The DCP-L2660DW keeps your printing costs down using a separate drum and toner unit, and the generous 1,200 pages⁷ inbox toner supporting your higher print volume needs. Toner is easy to change and high yield toner is available, printing up to 3,000 pages⁷, reducing your cost per page and frequency to replace.

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The DCP-L2660DW provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

Print from anywhere



With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print and scan documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.

Download the app on your mobile device to get started.



The automated toner subscription for your printer


Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.



TO FIND OUT MORE

Download the Brother Mobile Connect app or visit the website: brother.co.uk/decopro

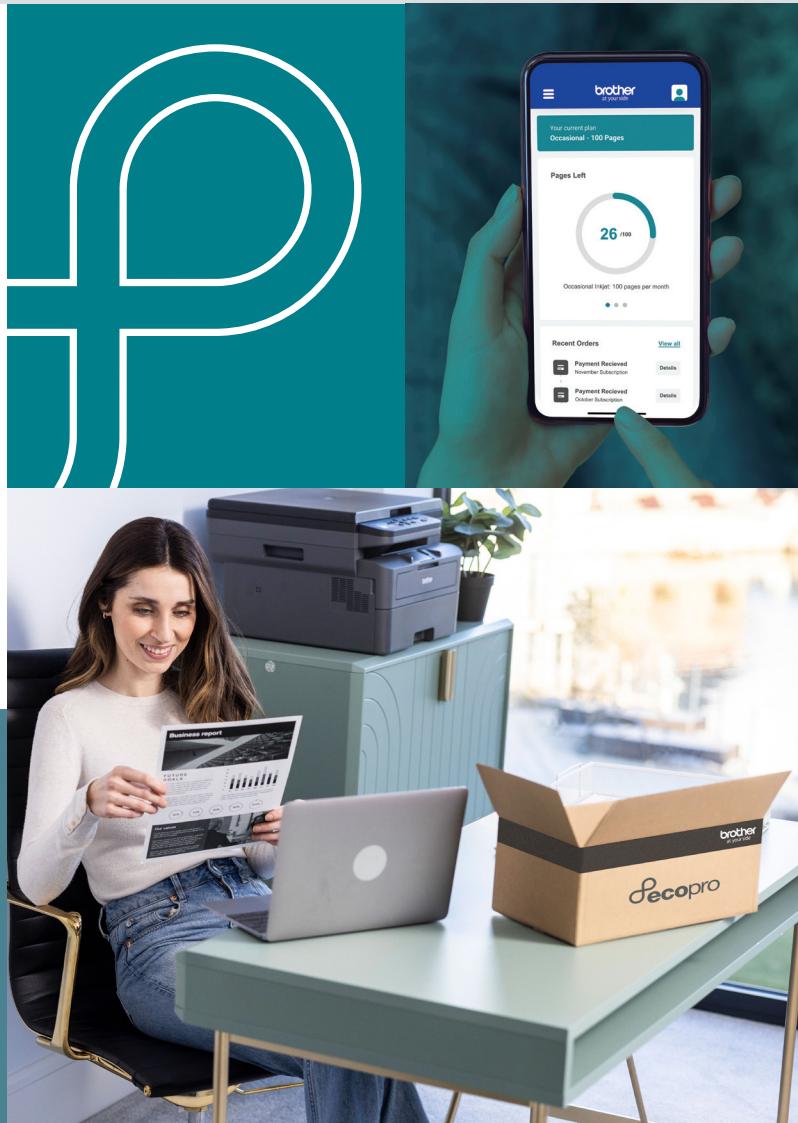

General

Technology
Electrophotographic Laser

Memory
265MB

Control panel
6.8cm Colour
Touchscreen LCD

Local Interface
Hi-Speed USB 2.0

Wired Network
Fast Ethernet

Wireless Network
2.4GHz and 5GHz Support

Carton Contents
Device, Inbox Toner, Drum,
Power Supply Cord, Quick
Set-Up Guide, Warranty Card

Print

Print Speed (A4)
1-Sided: 34ppm Mono
2-Sided: 16 sides
per minute Mono

FPOT
(First Print Out Time)
Up to 8.5 Seconds Mono

Quiet Mode
A mode to reduce the printing
noise

Resolution
Up to 1200 x 1200dpi

Print Languages
PCL6, BR-Script3,
PDF Version 1.7

Embedded Fonts (PCL)
73 scalable fonts,
12 bitmap fonts

Embedded Barcodes
(PCL)

16 bar codes*
*Code39, Interleaved 2 of 5, FIM
(US-PostNet), Post Net
(US-PostNet), EAN-8, EAN-13,
UPC-A, UPC-E, Codabar, ISBN
EAN), ISBN UPC-E),
Code128 (set A, set B, set C),
EAN128 (set A, set B, set C),
Code93, GS1Databar, MSI

Embedded Fonts
(Postscript)
66 scalable fonts

Printer Functions

N-up Printing
Reduce up to 25 pages into
a single page

Poster Printing
Enlarge a single page into a
poster using 2x2, 3x3, 4x4
or 5x5 pages

Toner Save Mode
Use the Toner Save Mode to
reduce toner consumption
without affecting print speed

Watermark Printing
Watermark your documents
with predefined text, custom
logo or custom messages

ID Printing
Add identification to your printed
documents (date and time,
short custom message or
PC username)

Booklet Printing
Print documents in A5 booklet
format using automatic or
manual 2-sided print

Print Profiles
Store your favourite driver
settings as profiles to easily
recall them

Manual 2-Sided Print
Manual 2-sided printing
(recommended for media
not supported by automatic
2-sided print)

Reverse Print
Rotate the content of a
printed document by 180°

Print Complete Notice
A printing notification can be
set to go to your computer
(Network only)

Printer Driver

Windows
Windows 11
(32 and 64 bit editions)
and more
macOS
Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux
CUPS, LPD/LPRng
(x86/x64 environment)
ChromeOS
Supports native
ChromeOS printing

PCL Driver
Universal Printer Driver
(Windows)
(PCL5e/BRScript)
PostScript Universal Printer Driver
Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper Handling¹¹

Paper Input
Standard Tray
250 Sheets
Manual Feed Slot
1 Sheet
Automatic Document Feeder (ADF)
50 Sheets
Paper Output
120 Sheets A4
Envelope Printing
Yes from manual feed slot

Media Sizes
Standard Tray
A4, Letter, B5(JIS), B5(ISO), A5, A5(Long Edge), B6(JIS), A6, Executive, A4 Short, 16K(195x270mm)

Manual Feed Slot
Width 76.2 to 215.9 mm, Length 127 to 355.6 mm Envelope; COM-10, DL, C5, Monarch
ADF

Width: 105 to 216 mm
Length: 147 to 356 mm

Scanner Glass
Up to A4/LTR

Auto 2-Sided
A4

Media Type and Weights

Standard Tray
Plain Paper, Thin Paper, Recycled Paper, Thick Paper
60-163gsm

Manual Feed Slot
Plain Paper, Thin Paper, Thick Paper, Thicker Paper, Recycled Paper, Bond, Label, Envelope, Env. Thin, Env. Thick
60-230gsm

ADF
Plain Paper, Recycled Paper 60 to 105gsm

Auto 2-Sided
Plain Paper, Thin Paper, Recycled Paper 64-105gsm

Mobile and Web Connectivity

Brother Mobile Connect¹⁷ (Android)
Print from, scan to, preview copies and check the machine status from an Android device
Brother Mobile Connect¹⁷ (iPad / iPhone)
Print from, scan to, preview copies and check the machine status from an iPad / iPhone

Apple AirPrint¹⁷
Print from and scan to most common file types from any AirPrint enabled application

Brother Print Service Plugin¹⁷
Print from an Android devices without a dedicated App.
Mopria™ 17
Print most common file types from Mopria™ supported Android devices

Brother Apps¹⁸
Scan to Mobile, Scan to Searchable PDF, Fax forward to Cloud/E-mail, Scan to PowerPoint, Scan to Excel, Scan to Word, Easy scan to E-mail, Cloud Secure Print, Email Print

Web Connect¹⁸
Print from and scan to without using a PC on Box, Dropbox, Evernote, OneDrive, Google Drive™ OneNote, SharePoint online

Copy

Copy Speed (A4)
1-Sided: 34ppm Mono

Resolution
Up to 600 x 600dpi

FCOT
(First Copy Out Time)
Up to 10 Seconds Mono

Grey Scale
256 shades of grey
(8 bit for each colour)

Copy Functions

Multi-Copying/Stack/Sort
Makes up to 99 copies of each page / Stacks or Sorts

Enlargement/Reduction Ratio
Reduce or Increase document sizes from 25% to 400% in 1% increments

2 in 1 ID Copying
Allows the user to copy both sides of an ID card to a single A4 sheet

N in 1 Copying
Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

Scanner Type
CIS (Contact Image Sensor)

Colour and Mono Scanning
Yes

Scan Speed (A4)³
1-Sided: 22.5ipm Mono and 7.5ipm Colour

Scan Resolution from ADF
600 x 600dpi

Scan Resolution from Scanner Glass
1200 x 1200dpi

Interpolated Scan Resolution
Brother Scanner Utility enhances up to 19,200 x 19,200 dpi

Colour Depth
30 bit colour Processing (Input)
24 bit colour Processing (Output)

Grey Scale
10 bit colour Processing (Input)
8 bit colour Processing (Output)

Scanner Functions

Supported File Formats
Including PDF (PDF/A, Secure PDF, Signed PDF, Searchable¹⁷), JPEG, TIFF

Standard Functions¹⁷
Scan to E-mail, OCR, Image, File

Network Scanning¹⁶
Scan to FTP, FTPS, HTTPS, Sharepoint (iPrint&Scan for Windows only)

Scan Features
Auto Deskew from ADF only (iPrint&Scan for Desktop)

Scan To Microsoft Office
Scan to Word (.docx), PowerPoint (.pptx), Excel (.xlsx) for Microsoft Office

Scan Profile¹⁵
Create up to 25 profiles for an easy way to store multiple scan settings (scan to FTP/ Sharepoint)

Document Separation
Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF

Scanner Drivers

Windows
TWAIN and WIA
Windows 11
(32 and 64 bit editions)

macOS

Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Linux

SANE (32 and 64 bit editions)

ChromeOS

Supports native ChromeOS scanning

Fleet Management Tools

BRAdmin^{16,17}

LAN/WAN management software

Embedded Web Server

Web based print management software embedded onto the device

Status Monitor¹⁶

Monitor the status of your machine from your computer

Software

Brother iPrint&Scan Desktop^{15,17}

Print from, scan to, preview copies and check the machine status from Windows or macOS PC

PaperPort SE 14^{16,17}

Document management and sharing program from KOFAX

Utilities

Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

Easy Setup

Simple access to drivers and software for the installation of your Brother machine from support.brother.com

Connectivity

Wired Network

Fast Ethernet
(10Base-T/100Base-TX)

Wireless Network

2.4GHz: IEEE 802.11 b/g/n
(Infrastructure Mode)
IEEE 802.11 g/n (Wi-Fi Direct)

5GHz: IEEE 802.11 a/n
(Infrastructure Mode)
IEEE 802.11 a/n (Wi-Fi Direct)

Wi-Fi Direct®

Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Wireless Setup Support

Wi-Fi Protected Setup (WPS)

Wireless Applications

Vertical Pairing

Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Local Interface

Hi-Speed USB 2.0

Security Features

Wired Network Security

SMTP-AUTH, SSL/TLS(SMTP, HTTP, IPP, FTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

Wireless Network Security

WEP 64/128 bit, WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES), WPA3-SAE (AES), WiFi Direct supports WPA2-PSK(AES) only.

SMTP-AUTH, SSL/TLS (SMTP,HTTP,IPP,FTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/ Port9100, SMTP Client, IPP/ IPPS, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/ Scan), SNTP Client

IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, SMTP Client, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, Web Services (Print/Scan), SNTP Client

IP Filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail Reports

Receive usage reports on a regular basis via e-mail

Automatic Intrusion Detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware Updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud Secure Print

Enables password protected driverless print job release

Certificate Management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public cerificate & private key for protected network communication

Digitally-signed Firmware

The firmware for Brother print and scan devices is digitally signed and secure

Port-based Network Access Control

(IEEE 802.1x)
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Supplies and Consumables

Inbox Toner⁷
1 x 1,200 pages (BK)

Standard Yield Toner⁷
TN2510 - 1,200 pages

High Yield Toner⁷
TN2510XL - 3,000 pages

Drum Unit
DR2510 Approx 15,000 pages
at 1 pages per job

Dimensions and Weights

With Carton (WxDxH)
580 x 517 x 434mm -13.90kg

Without Carton (WxDxH)
410 x 399 x 319mm - 11.4kg

Duty Cycle

Recommended Monthly
Up to 2,000 pages

Operating Environment

Power Requirement
220-240V
AC 50/60Hz

Operating Environment
Humidity 20 - 80 %
10°C - 32.5°C
50°F - 90.5°F

Storage Environment
Humidity 35 - 85 %
0°C - 40°C
32°F - 104°F

Environment

Approx Power Consumption^{13,23}
Copying: 490W
Copying in quiet mode: 280W
Printing: 470W
Printing in quiet mode: 270W
Ready: 43W
Sleep: 4.1W
Deep Sleep: 0.7W
Power Off: 0.08W

TEC Value
0.39 kWh/week

Sound Power¹²
Printing: 6.63B(A)
Ready: Inaudible
Quiet Mode: 6.12B(A)
Deep Sleep: Inaudible

Sound Pressure¹²
PC Printing (Mono):
Approx. 49.0dB(A)
Ready: 30.0db(A)
Quiet Mode: 44.0db(A)

Toner Save
This reduces the toner consumption to get more pages from your consumables

Blue Angel
Yes

GS Mark
Yes

Nordic Swan
Yes

- 3 Scan Speeds based on ISO/IEC 17991
 7 Approx. declared yield value in accordance with ISO/IEC 19752
 11 Capacity calculated with 80gsm paper
 12 Sound pressure and sound power level in accordance with ISO 7779
 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
 15 Windows and macOS only
 16 Windows only
 17 Optional download
 18 Requires an Internet connection
 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Compatible with Brother's EcoPro toner subscription



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

brother
at your side