


LIGHTTEK

DMX SPLITTER

HD-231 USER MANUAL

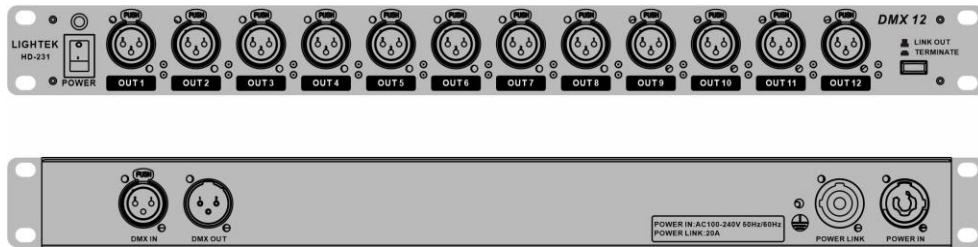


This model is a 12-way DMX splitter with one input and twelve outputs. It is completely electrically isolated between input and output and output to output. DMX input and DMX output are provided with 3-pin XLR connectors. Each DMX output has an independent driver and DATA+ & DATA- indicators. In addition, a Link Out/Terminate selector is used to prevent DMX output errors or malfunction caused by DMX input.

LIGHTTEK

DMX SPLITTER

CONNECTIONS:

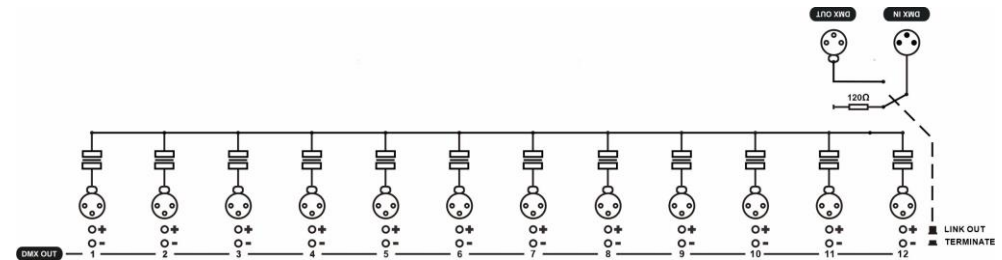

SPECIFICATIONS:

Main Supply	AC 100-240V 50/60Hz
Dimensions	482x152x44mm
Weight	2.35Kg

Safety Instructions:

Do not expose this product to high temperatures or humid areas to prevent fire or shock hazards.
This product is intended for indoor use only.
This apparatus must be earthed.
The device should only be opened and serviced by qualified laboratory personnel.
Disconnect the device from the power source before performing any maintenance.
Avoid inserting objects or spilling liquids into the device to prevent electric shock or short circuit.
Ensure adequate ventilation around the device to prevent overheating.