

Colors							
	1	2	3	4	5	6	7
	White	Black	Green	Red	Yellow	Blue	Orange



Flushbutton
NP8-□□BN/□□

E-03



Projecting button
NP8-□□GN/□□

E-04



Mushroom button,
self-reset
NP8-□□M/□□

E-05



Mushroom button, self-locking,
rotate to reset
NP8-□□ZS/□□

E-07



Illuminated mushroom
button, self-reset
NP8-□□MD/□□

E-06



Illuminated double-
head button
NP8-□□SD

E-08



Selector switch
NP8-□□×/□□

E-09



Illuminated Selector
switch
NP8-□□×D/□

E-10



Key switch
NP8-□ Y/□□

E-11



Double-head button
NP8-□□S

E-08



Illuminated flush button
NP8-□□BND/□□

E-03



Illuminated projecting
button
NP8-□□GND/□□

E-04



Indicator light
NP8-D/□

E-09



NP8 22mm Pushbutton Compound Models

1. General

Electric ratings: AC50/60Hz, AC415V/DC250V;
Degree of protection: IP65
Standard: IEC/EN60947-5-1

2. Operating conditions

- 2.1 Ambient temperature is $-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$, the average temperature during 24 hours couldn't exceed $+35^{\circ}\text{C}$.
- 2.2 Altitude: $\leq 2000\text{m}$.
- 2.3 Atmosphere condition: Relative humidity of the atmosphere couldn't exceed 50% when the highest temperature is $+40^{\circ}\text{C}$; much higher relative humidity is allowable under the condition of lower temperature, for example, when the temperature reaches $+20^{\circ}\text{C}$, the relative humidity is up to 90%. As for dews, which contingently appear due to change of temperature, special steps should be taken.
- 2.4 Pollution grade: 3
- 2.5 Installation category: II
- 2.6 Tightening torque is $0.8 \sim 1.2\text{N}\cdot\text{m}$ for the cable terminals. Cross section of the cable connection is $0.5 \sim 2.5\text{mm}^2$, and 8mm conductor length is needed.

3. Technical data

3.1 Refer to table below for rated values related to utilization category.

AC-15	Rated operational voltage, V	415	240	120
	Rated operational current, A	1.9	3	6
DC-13	Rated operational voltage, V	250	125	-
	Rated operational current, A	0.27	0.55	-

3.2 Refer to table 3 for basic parameters of illuminated pushbutton.

Basic parameters	LED lamp
Rated operational current	$\leq 20\text{mA}$
Rated operational voltage	AC/DC 6V, 12V, 24V, 36V, AC110V~230V

3.3 Durability

Mechanical life:

Flush, mushroom-headed and illuminated version:

3×10^6 operation circles.

Rotary, double-headed, self-locking and keyed version:

1×10^5 operation circles.

Electric life:

Flush, mushroom-headed and illuminated version:

AC 1×10^6 / DC 2.5×10^5 operation circles.

Rotary, double-headed, self-locking and key type button:

1×10^5 operation circles.

3.4 Short-circuit protective device: NT00-16 16A

4. Features

- 4.1 Operating mechanism features
bright colors and streamline surface.
- 4.2 Modular design.
Operating system, adapter, contact system and illuminating system can be freely combined to realize different functions.
- 4.3 Convenient for mounting
and dismounting thanks to snap-on structure.
- 4.4 Automatic locking function of the central adaptor makes it convenient and reliable for mounting and connection.
- 4.5 The terminal screw is available with anti-loosing mechanism to protect it against loosening from the body during transportation.
- 4.6 LED lamp with high brightness and long service life ensures reliable indication.

E

5. NP8 pushbutton


★ Momentary Flush Pushbutton-(Non illuminated)

NP8-□□ BN/ □□	Model	Color	↖	↗
	NP8-10BN/1	○	1	—
	NP8-10BN/2	●	1	—
	NP8-10BN/3	●	1	—
	NP8-10BN/4	●	1	—
	NP8-10BN/5	●	1	—
	NP8-10BN/6	●	1	—
	NP8-01BN/1	○	—	1
	NP8-01BN/2	●	—	1
	NP8-01BN/3	●	—	1
	NP8-01BN/4	●	—	1
	NP8-01BN/5	●	—	1
	NP8-01BN/6	●	—	1
	NP8-20BN/1	○	2	—
	NP8-20BN/2	●	2	—
	NP8-20BN/3	●	2	—
	NP8-20BN/4	●	2	—
	NP8-20BN/5	●	2	—
	NP8-20BN/6	●	2	—
	NP8-02BN/1	○	—	2
	NP8-02BN/2	●	—	2
	NP8-02BN/3	●	—	2
	NP8-02BN/4	●	—	2
	NP8-02BN/5	●	—	2
	NP8-02BN/6	●	—	2
	NP8-11BN/1	○	1	1
	NP8-11BN/2	●	1	1
	NP8-11BN/3	●	1	1
	NP8-11BN/4	●	1	1
	NP8-11BN/5	●	1	1
	NP8-11BN/6	●	1	1

★ Momentary Flush Pushbutton-illuminated AC/DC6V, 12V, 24V, 36V, AC110V~230V


NP8-□□ BND/ □□	Model	Color	↖	↗
	NP8-10BND/1	○	1	—
	NP8-10BND/3	●	1	—
	NP8-10BND/4	●	1	—
	NP8-10BND/5	●	1	—
	NP8-10BND/6	●	1	—
	NP8-01BND/1	○	—	1
	NP8-01BND/3	●	—	1
	NP8-01BND/4	●	—	1
	NP8-01BND/5	●	—	1
	NP8-01BND/6	●	—	1

Dimension (mm)

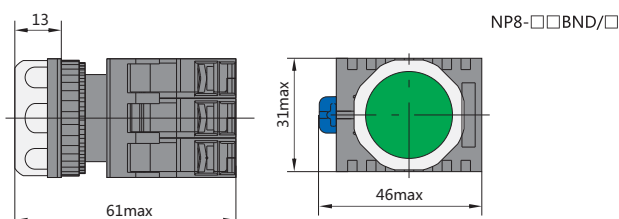

NP8-□□ BN/ □□	Model	Color	↖	↗
	NP8-30BN/1	○	3	—
	NP8-30BN/2	●	3	—
	NP8-30BN/3	●	3	—
	NP8-30BN/4	●	3	—
	NP8-30BN/5	●	3	—
	NP8-30BN/6	●	3	—
	NP8-03BN/1	○	—	3
	NP8-03BN/2	●	—	3
	NP8-03BN/3	●	—	3
	NP8-03BN/4	●	—	3
	NP8-03BN/5	●	—	3
	NP8-03BN/6	●	—	3
	NP8-12BN/1	○	1	2
	NP8-12BN/2	●	1	2
	NP8-12BN/3	●	1	2
	NP8-12BN/4	●	1	2
	NP8-12BN/5	●	1	2
	NP8-12BN/6	●	1	2
	NP8-21BN/1	○	2	1
	NP8-21BN/2	●	2	1
	NP8-21BN/3	●	2	1
	NP8-21BN/4	●	2	1
	NP8-21BN/5	●	2	1
	NP8-21BN/6	●	2	1

Dimension (mm)

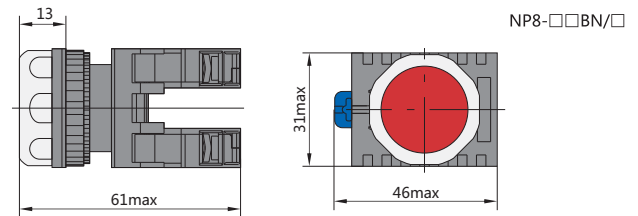

NP8-□□ BND/ □□	Model	Color	↖	↗
	NP8-20BND/1	○	2	—
	NP8-20BND/3	●	2	—
	NP8-20BND/4	●	2	—
	NP8-20BND/5	●	2	—
	NP8-20BND/6	●	2	—
	NP8-02BND/1	○	—	2
	NP8-02BND/3	●	—	2
	NP8-02BND/4	●	—	2
	NP8-02BND/5	●	—	2
	NP8-02BND/6	●	—	2
	NP8-11BND/1	○	1	1
	NP8-11BND/3	●	1	1
	NP8-11BND/4	●	1	1
	NP8-11BND/5	●	1	1
	NP8-11BND/6	●	1	1

★ Momentary Projecting Pushbutton-(Non illuminated)


NP8-□□ GN/□□	Model	Color	↖	↗
	NP8-10GN/1	○	1	—
	NP8-10GN/2	●	1	—
	NP8-10GN/3	●	1	—
	NP8-10GN/4	●	1	—
	NP8-10GN/5	●	1	—
	NP8-10GN/6	●	1	—
	NP8-01GN/1	○	—	1
	NP8-01GN/2	●	—	1
	NP8-01GN/3	●	—	1
	NP8-01GN/4	●	—	1
	NP8-01GN/5	●	—	1
	NP8-01GN/6	●	—	1
	NP8-20GN/1	○	2	—
	NP8-20GN/2	●	2	—
	NP8-20GN/3	●	2	—
	NP8-20GN/4	●	2	—
	NP8-20GN/5	●	2	—
	NP8-20GN/6	●	2	—
	NP8-02GN/1	○	—	2
	NP8-02GN/2	●	—	2
	NP8-02GN/3	●	—	2
	NP8-02GN/4	●	—	2
	NP8-02GN/5	●	—	2
	NP8-02GN/6	●	—	2
	NP8-11GN/1	○	1	1
	NP8-11GN/2	●	1	1
	NP8-11GN/3	●	1	1
	NP8-11GN/4	●	1	1
	NP8-11GN/5	●	1	1
	NP8-11GN/6	●	1	1

NP8-□□ GN/□□	Model	Color	↖	↗
	NP8-30GN/1	○	3	—
	NP8-30GN/2	●	3	—
	NP8-30GN/3	●	3	—
	NP8-30GN/4	●	3	—
	NP8-30GN/5	●	3	—
	NP8-30GN/6	●	3	—
	NP8-03GN/1	○	—	3
	NP8-03GN/2	●	—	3
	NP8-03GN/3	●	—	3
	NP8-30GN/4	●	3	—
	NP8-30GN/5	●	3	—
	NP8-30GN/6	●	3	—
	NP8-03GN/1	○	—	3
	NP8-03GN/2	●	—	3
	NP8-03GN/3	●	—	3
	NP8-03GN/4	●	—	3
	NP8-03GN/5	●	—	3
	NP8-03GN/6	●	—	3
	NP8-12GN/1	○	1	2
	NP8-12GN/2	●	1	2
	NP8-12GN/3	●	1	2
	NP8-12GN/4	●	1	2
	NP8-12GN/5	●	1	2
	NP8-12GN/6	●	1	2
	NP8-21GN/1	○	2	1
	NP8-21GN/2	●	2	1
	NP8-21GN/3	●	2	1
	NP8-21GN/4	●	2	1
	NP8-21GN/5	●	2	1
	NP8-21GN/6	●	2	1


★ Momentary Projecting Pushbutton-illuminated
AC/DC6V, 12V, 24V, 36V, AC110V~230V

NP8-□□ GND/□□	Model	Color	↖	↗
	NP8-10GND/1	○	1	—
	NP8-10GND/3	●	1	—
	NP8-10GND/4	●	1	—
	NP8-10GND/5	●	1	—
	NP8-10GND/6	●	1	—
	NP8-01GND/1	○	—	1
	NP8-01GND/3	●	—	1
	NP8-01GND/4	●	—	1
	NP8-01GND/5	●	—	1
	NP8-01GND/6	●	—	1

Dimension (mm)

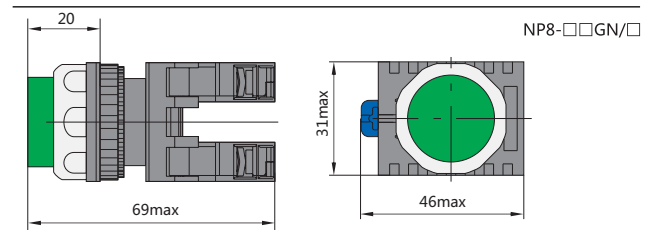

Dimension (mm)

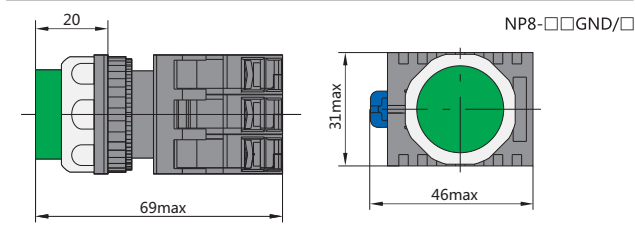

NP8-□□ GND/□□	Model	Color	↖	↗
	NP8-20GND/1	○	2	—
	NP8-20GND/3	●	2	—
	NP8-20GND/4	●	2	—
	NP8-20GND/5	●	2	—
	NP8-20GND/6	●	2	—
	NP8-02GND/1	○	—	2
	NP8-02GND/3	●	—	2
	NP8-02GND/4	●	—	2
	NP8-02GND/5	●	—	2
	NP8-02GND/6	●	—	2
	NP8-11GND/1	○	1	1
	NP8-11GND/3	●	1	1
	NP8-11GND/4	●	1	1
	NP8-11GND/5	●	1	1
	NP8-11GND/6	●	1	1

★ Φ40 Momentary Mushroom Pushbutton-(Non illuminated)

NP8-□□ M/□□	Model	Color	↖	↗
	NP8-10M/11	○	1	—
	NP8-10M/12	●	1	—
	NP8-10M/13	●	1	—
	NP8-10M/14	●	1	—
	NP8-10M/15	●	1	—
	NP8-10M/16	●	1	—
	NP8-01M/11	○	—	1
	NP8-01M/12	●	—	1
	NP8-01M/13	●	—	1
	NP8-01M/14	●	—	1
	NP8-01M/15	●	—	1
	NP8-01M/16	●	—	1
	NP8-20M/11	○	2	—
	NP8-20M/12	●	2	—
	NP8-20M/13	●	2	—
	NP8-20M/14	●	2	—
	NP8-20M/15	●	2	—
	NP8-20M/16	●	2	—
	NP8-02M/11	○	—	2
	NP8-02M/12	●	—	2
	NP8-02M/13	●	—	2
	NP8-02M/14	●	—	2
	NP8-02M/15	●	—	2
	NP8-02M/16	●	—	2
	NP8-11M/11	○	1	1
	NP8-11M/12	●	1	1
	NP8-11M/13	●	1	1
	NP8-11M/14	●	1	1
	NP8-11M/15	●	1	1
	NP8-11M/16	●	1	1
	NP8-30M/11	○	3	—
	NP8-30M/12	●	3	—
	NP8-30M/13	●	3	—
	NP8-30M/14	●	3	—
	NP8-30M/15	●	3	—
	NP8-30M/16	●	3	—
	NP8-03M/11	○	—	3
	NP8-03M/12	●	—	3
	NP8-03M/13	●	—	3


NP8-□□ M/□□	Model	Color	↖	↗
	NP8-03M/14	●	—	3
	NP8-03M/15	●	—	3
	NP8-03M/16	●	—	3
	NP8-12M/11	○	1	2
	NP8-12M/12	●	1	2
	NP8-12M/13	●	1	2
	NP8-12M/14	●	1	2
	NP8-12M/15	●	1	2
	NP8-12M/16	●	1	2
	NP8-21M/11	○	2	1
	NP8-21M/12	●	2	1
	NP8-21M/13	●	2	1
	NP8-21M/14	●	2	1
	NP8-21M/15	●	2	1
	NP8-21M/16	●	2	1

★ Φ60 Momentary Mushroom Pushbutton-(Non illuminated)

NP8-□□ M/□□	Model	Color	↖	↗
	NP8-10M/21	○	1	—
	NP8-10M/22	●	1	—
	NP8-10M/23	●	1	—
	NP8-10M/24	●	1	—
	NP8-10M/25	●	1	—
	NP8-10M/26	●	1	—
	NP8-01M/21	○	—	1
	NP8-01M/22	●	—	1
	NP8-01M/23	●	—	1
	NP8-01M/24	●	—	1
	NP8-01M/25	●	—	1
	NP8-01M/26	●	—	1
	NP8-20M/21	○	2	—
	NP8-20M/22	●	2	—
	NP8-20M/23	●	2	—
	NP8-20M/24	●	2	—
	NP8-20M/25	●	2	—
	NP8-20M/26	●	2	—
	NP8-02M/21	○	—	2
	NP8-02M/22	●	—	2

NP8-□□ M/ □□	Model	Color		
	NP8-02M/23		—	2
	NP8-02M/24		—	2
	NP8-02M/25		—	2
	NP8-02M/26		—	2
	NP8-11M/21		1	1
	NP8-11M/22		1	1
	NP8-11M/23		1	1
	NP8-11M/24		1	1
	NP8-11M/25		1	1
	NP8-11M/26		1	1
	NP8-30M/21		3	—
	NP8-30M/22		3	—
	NP8-30M/23		3	—
	NP8-30M/24		3	—
	NP8-30M/25		3	—
	NP8-30M/26		3	—
	NP8-03M/21		—	3
	NP8-03M/22		—	3
	NP8-03M/23		—	3
	NP8-03M/24		—	3
	NP8-03M/25		—	3
	NP8-03M/26		—	3
	NP8-12M/21		1	2
	NP8-12M/22		1	2
	NP8-12M/23		1	2
	NP8-12M/24		1	2
	NP8-12M/25		1	2
	NP8-12M/26		1	2
	NP8-21M/21		2	1
	NP8-21M/22		2	1
	NP8-21M/23		2	1
	NP8-21M/24		2	1
	NP8-21M/25		2	1
	NP8-21M/26		2	1

Dimension (mm)

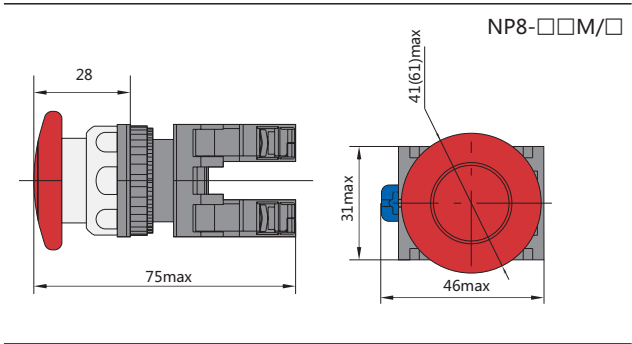

★ Φ40 Momentary Mushroom Pushbutton-illuminated
AC/DC6V, 12V, 24V, 36V, AC110V~230V


NP8-□□ M/ □□	Model	Color		
	NP8-10MD/11		1	—
	NP8-10MD/13		1	—
	NP8-10MD/14		1	—
	NP8-10MD/15		1	—
	NP8-10MD/16		1	—
	NP8-01MD/11		—	1
	NP8-01MD/13		—	1
	NP8-01MD/14		—	1
	NP8-01MD/15		—	1
	NP8-01MD/16		—	1
	NP8-20MD/11		2	—
	NP8-20MD/13		2	—
	NP8-20MD/14		2	—
	NP8-20MD/15		2	—
	NP8-20MD/16		2	—
	NP8-02MD/11		—	2
	NP8-02MD/13		—	2
	NP8-02MD/14		—	2
	NP8-02MD/15		—	2
	NP8-02MD/16		—	2
	NP8-11MD/11		1	1
	NP8-11MD/13		1	1
	NP8-11MD/14		1	1
	NP8-11MD/15		1	1
	NP8-11MD/16		1	1

★ Φ60 Momentary Mushroom Pushbutton-illuminated
AC/DC6V, 12V, 24V, 36V, AC110V~230V

NP8-□□ M/ □□	Model	Color		
	NP8-10MD/21		1	—
	NP8-10MD/23		1	—
	NP8-10MD/24		1	—
	NP8-10MD/25		1	—
	NP8-10MD/26		1	—
	NP8-01MD/21		—	1
	NP8-01MD/23		—	1
	NP8-01MD/24		—	1
	NP8-01MD/25		—	1
	NP8-01MD/26		—	1

NP8-□□ MD/□□	Model	Color		
	NP8-20MD/21	White	2	—
	NP8-20MD/23	Green	2	—
	NP8-20MD/24	Red	2	—
	NP8-20MD/25	Yellow	2	—
	NP8-20MD/26	Blue	2	—
	NP8-02MD/21	White	—	2
	NP8-02MD/23	Green	—	2
	NP8-02MD/24	Red	—	2
	NP8-02MD/25	Yellow	—	2
	NP8-02MD/26	Blue	—	2
	NP8-11MD/21	White	1	1
	NP8-11MD/23	Green	1	1
	NP8-11MD/24	Red	1	1
	NP8-11MD/25	Yellow	1	1
	NP8-11MD/26	Blue	1	1

Dimension (mm)

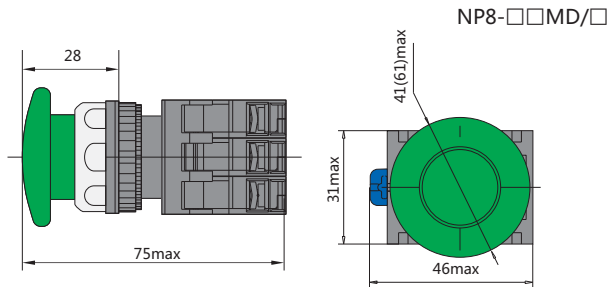

★ Φ40 Mushroom Latching Pushbutton.turn to release
(Non-illuminated)

NP8-□□ ZS/□□	Model	Color		
	NP8-10ZS/14	Red	1	—
	NP8-01ZS/14	Red	—	1

NP8-□□ ZS/□□	Model	Color		
	NP8-20ZS/14	Red	2	—
	NP8-02ZS/14	Red	—	2
	NP8-11ZS/14	Red	1	1

★ Φ60 Mushroom Latching Pushbutton.turn to release
(Non-illuminated)

NP8-□□ ZS/□□	Model	Color		
	NP8-10ZS/24	Red	1	—
	NP8-01ZS/24	Red	—	1
	NP8-20ZS/24	Red	2	—

NP8-□□ ZS/□□	Model	Color		
	NP8-02ZS/24	●	—	2
	NP8-11ZS/24	●	1	1


★ Φ30 Mushroom Latching Pushbutton.turn to release
(Non-illuminated)

NP8-□□ ZS/□□	Model	Color		
	NP8-10ZS/34	●	1	—
	NP8-01ZS/34	●	—	1

★ Φ30 Mrushoom Latching Pushbutton.turn to release
(Non-illuminated)

NP8-□□ ZS/□□	Model	Color		
	NP8-20ZS/34	●	2	—
	NP8-02ZS/34	●	—	2
	NP8-11ZS/34	●	1	1

Dimension (mm)

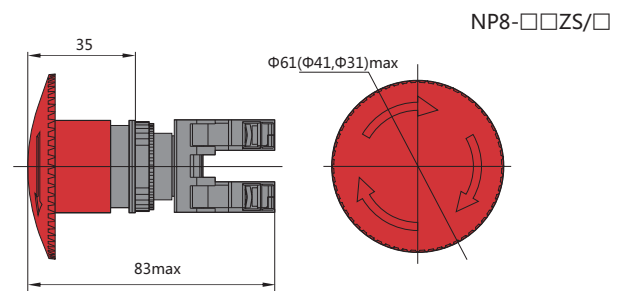



★ Double-headed flush momentary button (Non-illuminated)

NP8-□□S	Lamp-Voltage	Model	Color		
	Non-illuminated	NP8-20S	● + ●	2	—
		NP8-02S	● + ●	—	2
		NP8-11S	● + ●	1	1

★ Double-headed flush momentary button (Illuminated)

NP8-□□SD	Lamp-Voltage	Model	Color		
	LED: AC/DC 6V, 12V, 24V, 36V; AC 110V ~230V	NP8-20SD	● + ●	2	—
		NP8-02SD	● + ●	—	2
		NP8-11SD	● + ●	1	1

Dimension (mm)

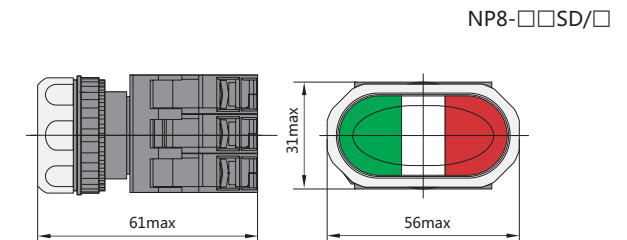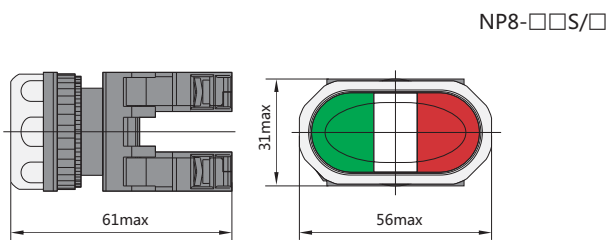


★ Light

NP8-D/□	Lamp-Voltage	Model	Color
	LED: AC/AD 6V, 12V, 24V, 36V; AC110V~230V	NP8-D/1	○
		NP8-D/3	●
		NP8-D/4	●
		NP8-D/5	●
		NP8-D/6	●

★ Selector Switches (2 positions)-(Non-illuminated)

NP8-□□ X/□	Metal	Color	Selector Switches	↖	↗
	NP8-10X/211	○		1	—
	NP8-10X/212	●		1	—
	NP8-10X/213	●		1	—
	NP8-10X/214	●		1	—
	NP8-10X/215	●		1	—
	NP8-10X/216	●		1	—
	NP8-01X/211	○		—	1
	NP8-01X/212	●		—	1
	NP8-01X/213	●		—	1
	NP8-01X/214	●		—	1
	NP8-01X/215	●		—	1
	NP8-01X/216	●		—	1
	NP8-10X/221	○		1	—
	NP8-10X/222	●		1	—
	NP8-10X/223	●		1	—
	NP8-10X/224	●		1	—
	NP8-10X/225	●		1	—
	NP8-10X/226	●		1	—
	NP8-01X/221	○		—	1
	NP8-01X/222	●		—	1
	NP8-01X/223	●		—	1
	NP8-01X/224	●		—	1
	NP8-01X/225	●		—	1
	NP8-01X/226	●		—	1
	NP8-20X/211	○		2	—
	NP8-20X/212	●		2	—
	NP8-20X/213	●		2	—
	NP8-20X/214	●		2	—
	NP8-20X/215	●		2	—
	NP8-20X/216	●		2	—
	NP8-02X/211	○		—	2
	NP8-02X/212	●		—	2
	NP8-02X/213	●		—	2
	NP8-02X/214	●		—	2
	NP8-02X/215	●		—	2
	NP8-02X/216	●		—	2
	NP8-11X/211	○		1	1
	NP8-11X/212	●		1	1
	NP8-11X/213	●		1	1
	NP8-11X/214	●		1	1
	NP8-11X/215	●		1	1
	NP8-11X/216	●		1	1

Dimension (mm)

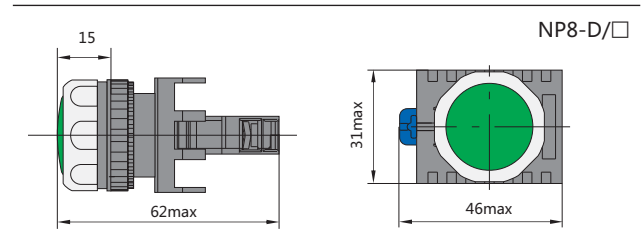

NP8-□□ X/22□	Metal	Color	Selector Switches	↖	↗
	NP8-20X/221	○		2	—
	NP8-20X/222	●		2	—
	NP8-20X/223	●		2	—
	NP8-20X/224	●		2	—
	NP8-20X/225	●		2	—
	NP8-20X/226	●		2	—
	NP8-02X/221	○		—	2
	NP8-02X/222	●		—	2
	NP8-02X/223	●		—	2
	NP8-02X/224	●		—	2
	NP8-02X/225	●		—	2
	NP8-02X/226	●		—	2
	NP8-11X/221	○		1	1
	NP8-11X/222	●		1	1
	NP8-11X/223	●		1	1
	NP8-11X/224	●		1	1
	NP8-11X/225	●		1	1
	NP8-11X/226	●		1	1

★ Selector Switches (3 positions)-(Non-illuminated)


NP8-□□ X/□	Metal	Color	Selector Switches	↖	↗
	NP8-20X/311	○		2	—
	NP8-20X/312	●		2	—
	NP8-20X/313	●		2	—
	NP8-20X/314	●		2	—
	NP8-20X/315	●		2	—
	NP8-20X/316	●		2	—
	NP8-02X/311	○		—	2
	NP8-02X/312	●		—	2
	NP8-02X/313	●		—	2
	NP8-02X/314	●		—	2
	NP8-02X/315	●		—	2
	NP8-02X/316	●		—	2
	NP8-11X/311	○		1	1
	NP8-11X/312	●		1	1
	NP8-11X/313	●		1	1
	NP8-11X/314	●		1	1
	NP8-11X/315	●		1	1
	NP8-11X/316	●		1	1

NP8- ☐ ☐ X/33 ☐	Metal	Color	Selector Switches		
	NP8-20X/331			2	—
	NP8-20X/332			2	—
	NP8-20X/333			2	—
	NP8-20X/334			2	—
	NP8-20X/335			2	—
	NP8-20X/336			2	—
	NP8-02X/331			—	2
	NP8-02X/332			—	2
	NP8-02X/333			—	2
	NP8-02X/334			—	2
	NP8-02X/335			—	2
	NP8-02X/336			—	2
	NP8-11X/331			1	1
	NP8-11X/332			1	1
	NP8-11X/333			1	1
	NP8-11X/334			1	1
	NP8-11X/335			1	1
	NP8-11X/336			1	1
NP8- ☐ ☐ X/37 ☐	Metal	Color	Selector Switches		
	NP8-20X/371			2	—
	NP8-20X/372			2	—
	NP8-20X/373			2	—
	NP8-20X/374			2	—
	NP8-20X/375			2	—
	NP8-20X/376			2	—
	NP8-02X/371			—	2
	NP8-02X/372			—	2
	NP8-02X/373			—	2
	NP8-02X/374			—	2
	NP8-02X/375			—	2
	NP8-02X/376			—	2
	NP8-11X/371			1	1
	NP8-11X/372			1	1
	NP8-11X/373			1	1
	NP8-11X/374			1	1
	NP8-11X/375			1	1
	NP8-11X/376			1	1
NP8- ☐ ☐ X/38 ☐	Metal	Color	Selector Switches		
	NP8-20X/381			2	—
	NP8-20X/382			2	—
	NP8-20X/383			2	—
	NP8-20X/384			2	—
	NP8-20X/385			2	—
	NP8-20X/386			2	—
	NP8-02X/381			—	2
	NP8-02X/382			—	2
	NP8-02X/383			—	2
	NP8-02X/384			—	2
	NP8-02X/385			—	2
	NP8-02X/386			—	2
	NP8-11X/381			1	1
	NP8-11X/382			1	1
	NP8-11X/383			1	1
	NP8-11X/384			1	1
	NP8-11X/385			1	1
	NP8-11X/386			1	1

★ Selector Switches (2 positions) -(Illuminated)
AC/DC6V, 12V, 24V, 36V, AC110V~230V

NP8- □□ XD/ □	Metal	Color	Selector Switches		
	NP8-10XD/211			1	—
	NP8-10XD/213			1	—
	NP8-10XD/214			1	—
	NP8-10XD/215			1	—
	NP8-10XD/216			1	—
	NP8-01XD/211			—	1
	NP8-01XD/213			—	1
	NP8-01XD/214			—	1
	NP8-01XD/215			—	1
	NP8-01XD/216			—	1
NP8- □□ XD/22□	Metal	Color	Selector Switches		
	NP8-10XD/221			1	—
	NP8-10XD/223			1	—
	NP8-10XD/224			1	—
	NP8-10XD/225			1	—
	NP8-10XD/226			1	—
	NP8-01XD/221			—	1
	NP8-01XD/223			—	1
	NP8-01XD/224			—	1
	NP8-01XD/225			—	1
	NP8-01XD/226			—	1
NP8- □□ XD/ □	Metal	Color	Selector Switches		
	NP8-20XD/211			2	—
	NP8-20XD/213			2	—
	NP8-20XD/214			2	—
	NP8-20XD/215			2	—
	NP8-20XD/216			2	—
	NP8-02XD/211			—	2
	NP8-02XD/213			—	2
	NP8-02XD/214			—	2
	NP8-02XD/215			—	2
	NP8-02XD/216			—	2
	NP8-11XD/211			1	1
	NP8-11XD/213			1	1
	NP8-11XD/214			1	1
	NP8-11XD/215			1	1
	NP8-11XD/216			1	1
	NP8- □□ XD/22□	Metal		Color	Selector Switches
	NP8-20XD/221			2	—
	NP8-20XD/223			2	—
	NP8-20XD/224			2	—
	NP8-20XD/225			2	—
	NP8-20XD/226			2	—
	NP8-02XD/221			—	2
	NP8-02XD/223			—	2
	NP8-02XD/224			—	2
	NP8-02XD/225			—	2
	NP8-02XD/226			—	2
	NP8-11XD/221			1	1
	NP8-11XD/223			1	1
	NP8-11XD/224			1	1
	NP8-11XD/225			1	1
	NP8-11XD/226			1	1

★ Key Switches (2 positions)-(Non-illuminated)


NP8-□□ Y/□	Metal	Key Switches	↖	↗
	NP8-10Y/21		1	—
	NP8-01Y/21		—	1
NP8-□□ Y/22	Metal	Key Switches	↖	↗
	NP8-10Y/22		1	—
	NP8-01Y/22		—	1
NP8-□□ Y/□	Metal	Key Switches	↖	↗
	NP8-20Y/21		2	—
	NP8-02Y/21		—	2
	NP8-11Y/21		1	1
NP8-□□ Y/22	Metal	Key Switches	↖	↗
	NP8-20Y/22		2	—
	NP8-02Y/22		—	2
	NP8-11Y/22		1	1

★ Selector Switches (3 positions) -(Illuminated)
AC/DC6V, 12V, 24V, 36V, AC110V~230V




NP8- □□ XD/ □	Metal	Color	Selector Switches	↖	↗
	NP8-20XD/311	○		2	—
	NP8-20XD/313	●		2	—
	NP8-20XD/314	●		2	—
	NP8-20XD/315	●		2	—
	NP8-20XD/316	●		2	—
	NP8-02XD/311	○		—	2
	NP8-02XD/313	●		—	2
	NP8-02XD/314	●		—	2
	NP8-02XD/315	●		—	2
	NP8-02XD/316	●		—	2
	NP8-11XD/311	○		1	1
	NP8-11XD/313	●		1	1
	NP8-11XD/314	●		1	1
	NP8-11XD/315	●		1	1
	NP8-11XD/316	●		1	1

NP8- □□ XD/33□	Metal	Color	Selector Switches	↖	↗
	NP8-20XD/331	○		2	—
	NP8-20XD/333	●		2	—
	NP8-20XD/334	●		2	—
	NP8-20XD/335	●		2	—
	NP8-20XD/336	●		2	—
	NP8-02XD/331	○		—	2
	NP8-02XD/333	●		—	2
	NP8-02XD/334	●		—	2
	NP8-02XD/335	●		—	2
	NP8-02XD/336	●		—	2
	NP8-11XD/331	○		1	1
	NP8-11XD/333	●		1	1
	NP8-11XD/334	●		1	1
	NP8-11XD/335	●		1	1
	NP8-11XD/336	●		1	1
NP8- □□ XD/37□	Metal	Color	Selector Switches	↖	↗
	NP8-20XD/371	○		2	—
	NP8-20XD/373	●		2	—
	NP8-20XD/374	●		2	—
	NP8-20XD/375	●		2	—
	NP8-20XD/376	●		2	—
	NP8-02XD/371	○		—	2
	NP8-02XD/373	●		—	2
	NP8-02XD/374	●		—	2
	NP8-02XD/375	●		—	2
	NP8-02XD/376	●		—	2
	NP8-11XD/371	○		1	1
	NP8-11XD/373	●		1	1
	NP8-11XD/374	●		1	1
	NP8-11XD/375	●		1	1
	NP8-11XD/376	●		1	1
NP8- □□ XD/38□	Metal	Color	Selector Switches	↖	↗
	NP8-20XD/381	○		2	—
	NP8-20XD/383	●		2	—
	NP8-20XD/384	●		2	—
	NP8-20XD/385	●		2	—
	NP8-20XD/386	●		2	—
	NP8-02XD/381	○		—	2
	NP8-02XD/383	●		—	2
	NP8-02XD/384	●		—	2
	NP8-02XD/385	●		—	2
	NP8-02XD/386	●		—	2
	NP8-11XD/381	○		1	1
	NP8-11XD/383	●		1	1
	NP8-11XD/384	●		1	1
	NP8-11XD/385	●		1	1
	NP8-11XD/386	●		1	1


Dimension (mm)

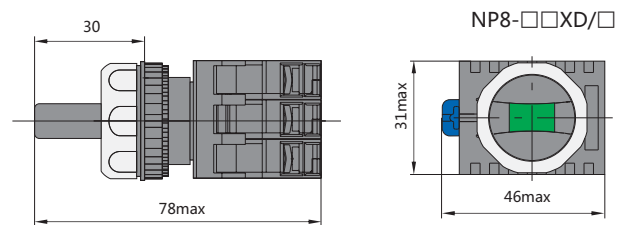

★ Key Switches (3 positions)-(Non-illuminated)

NP8-□□ Y/□	Metal	Key Switches		
	NP8-20Y/31		2	—
	NP8-02Y/31		—	2
	NP8-11Y/31		1	1
NP8-□□ Y/33	Metal	Key Switches		
	NP8-20Y/33		2	—
	NP8-02Y/33		—	2
	NP8-11Y/33		1	1
NP8-□□ Y/37	Metal	Key Switches		
	NP8-20Y/37		2	—
	NP8-02Y/37		—	2
	NP8-11Y/37		1	1
NP8-□□ Y/38	Metal	Key Switches		
	NP8-20Y/38		2	—
	NP8-02Y/38		—	2
	NP8-11Y/38		1	1

Dimension (mm)

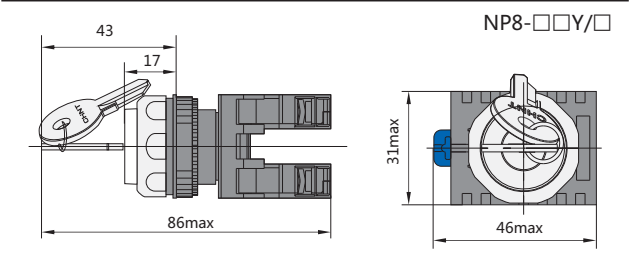

Dimension (mm)

