
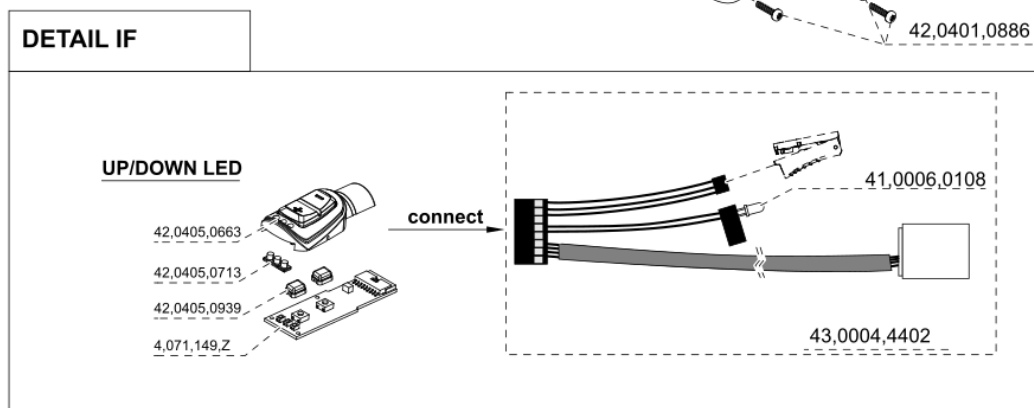
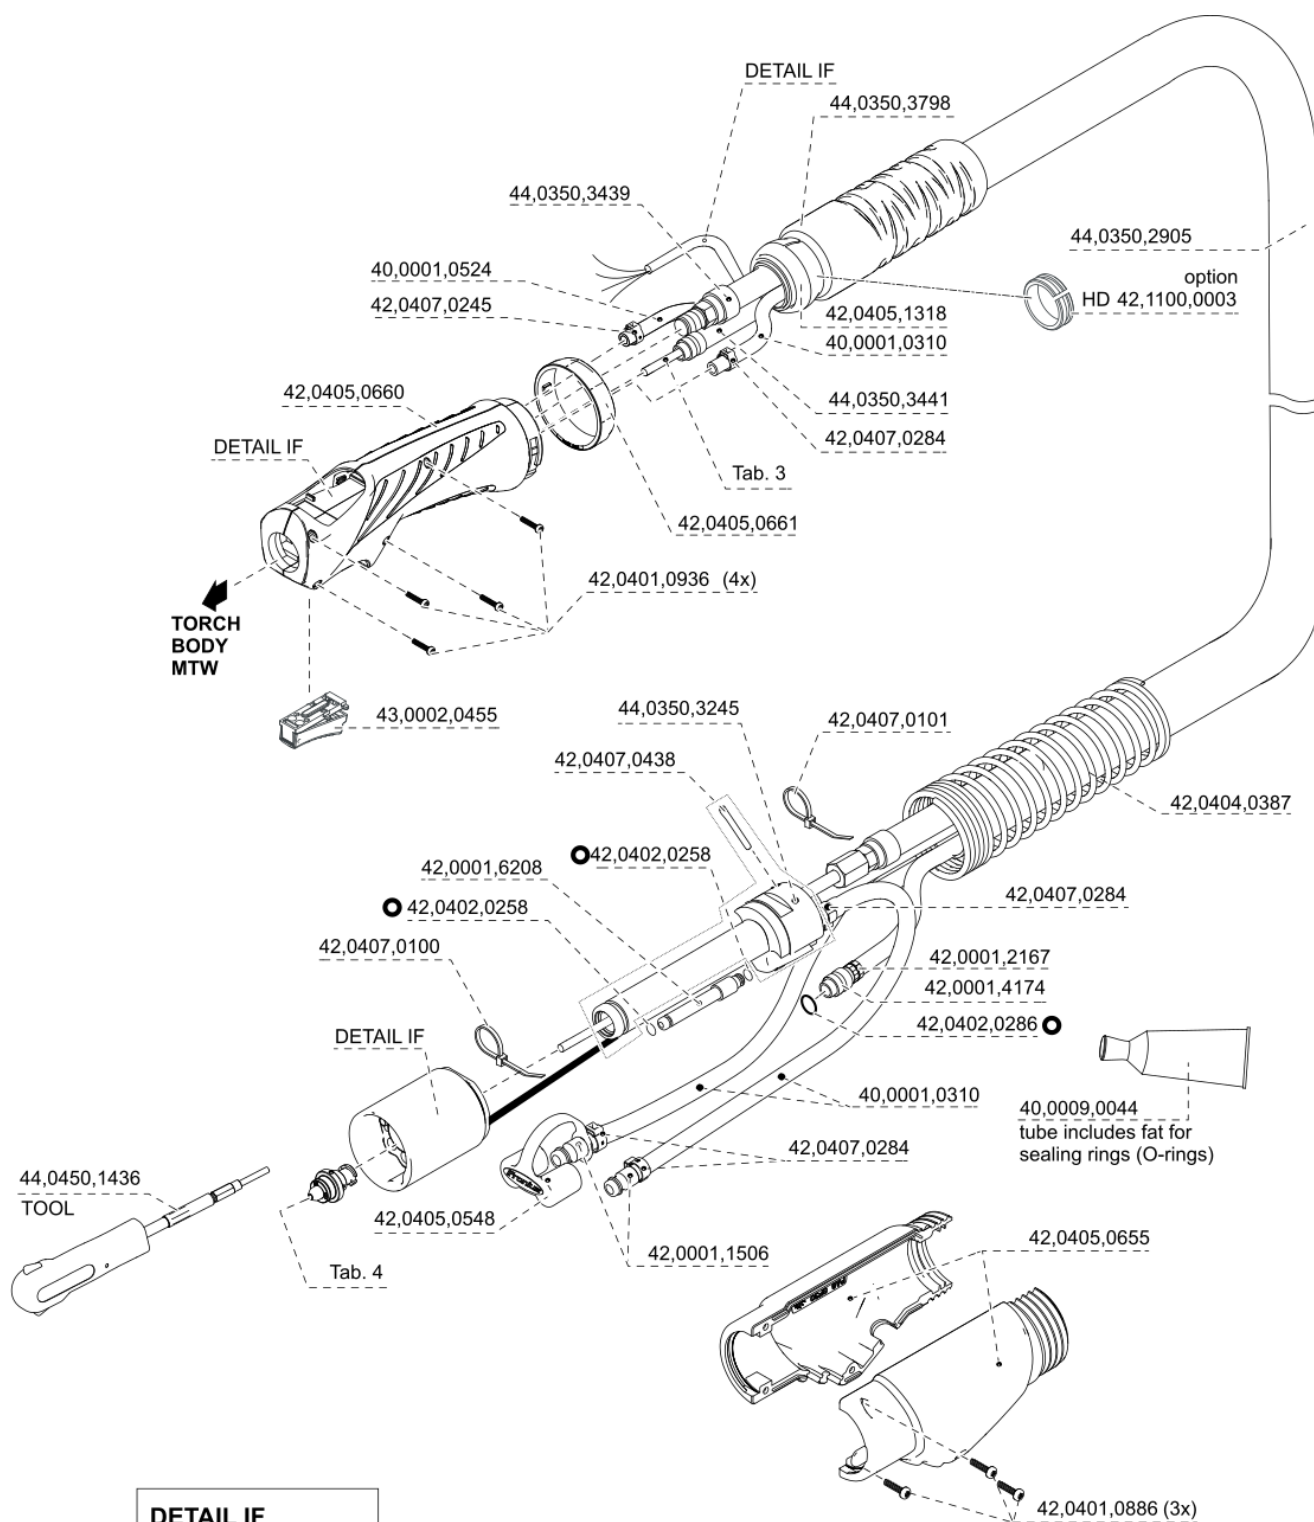


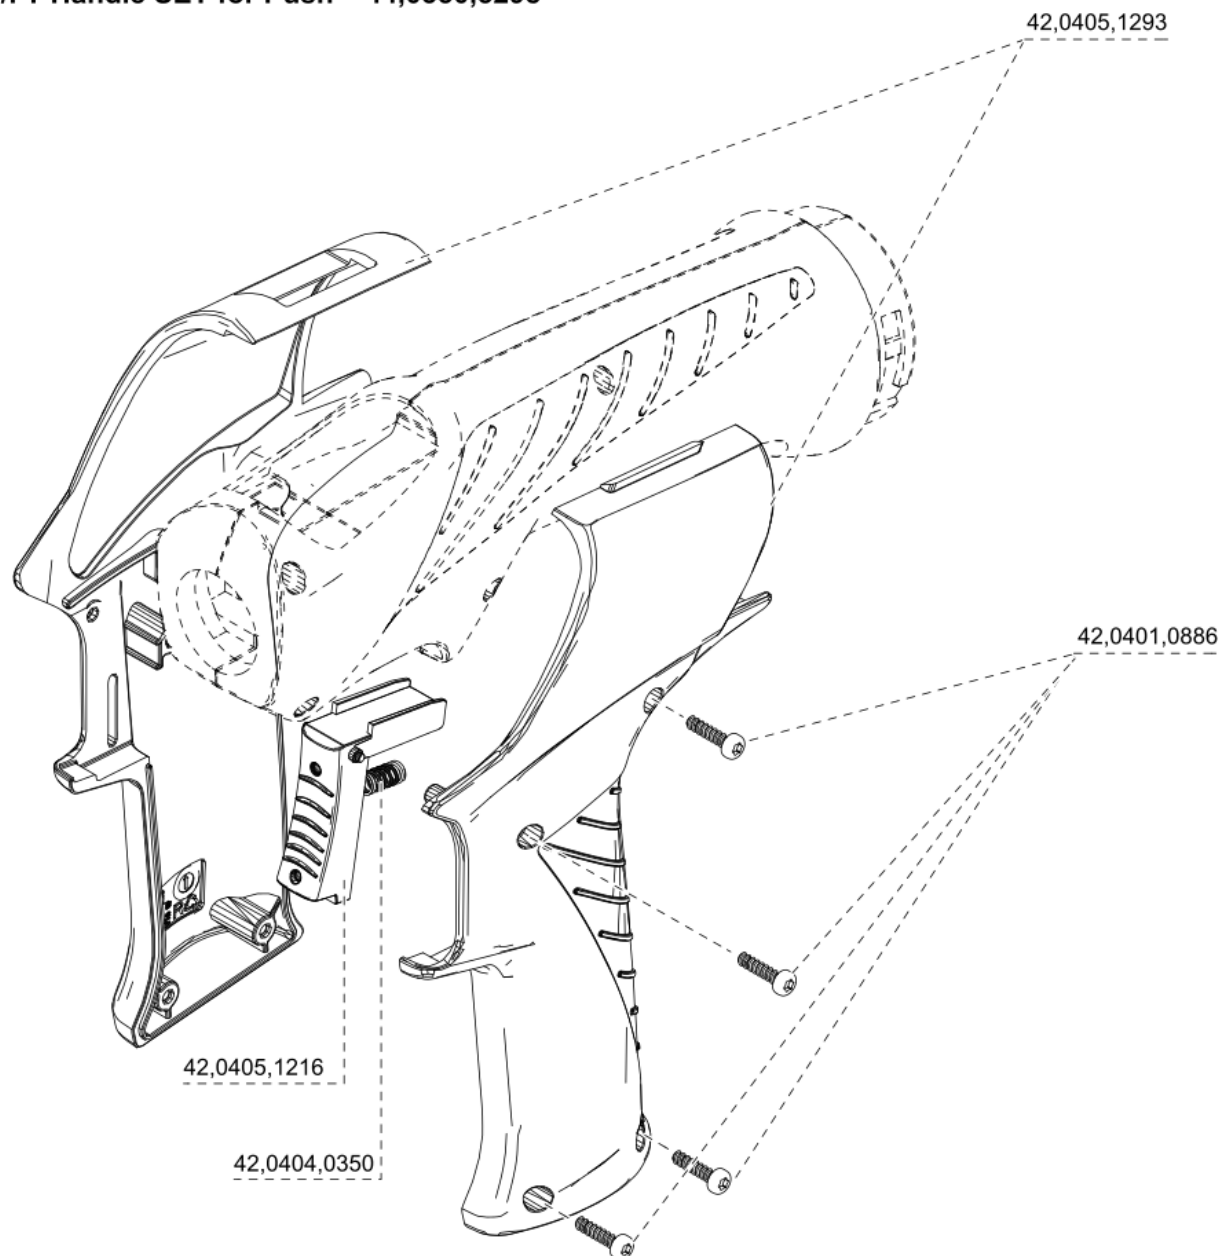
MTW 500i /FSC/UD/4,5m/45°
LED
4,035,961



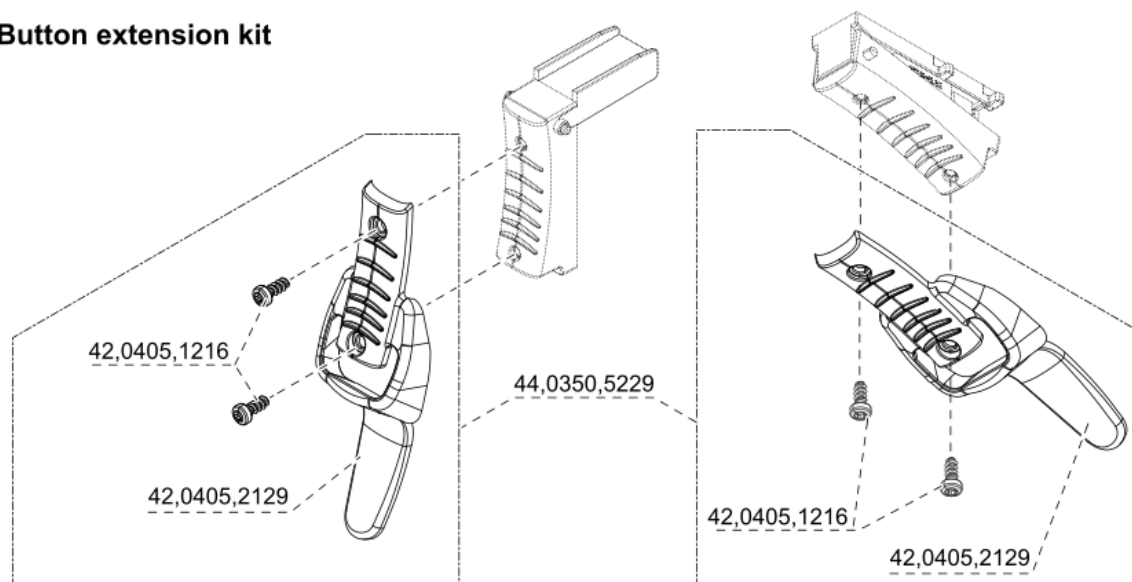


MTW 500i /FSC/UD/4.5m/45°/LED (4,035,961)

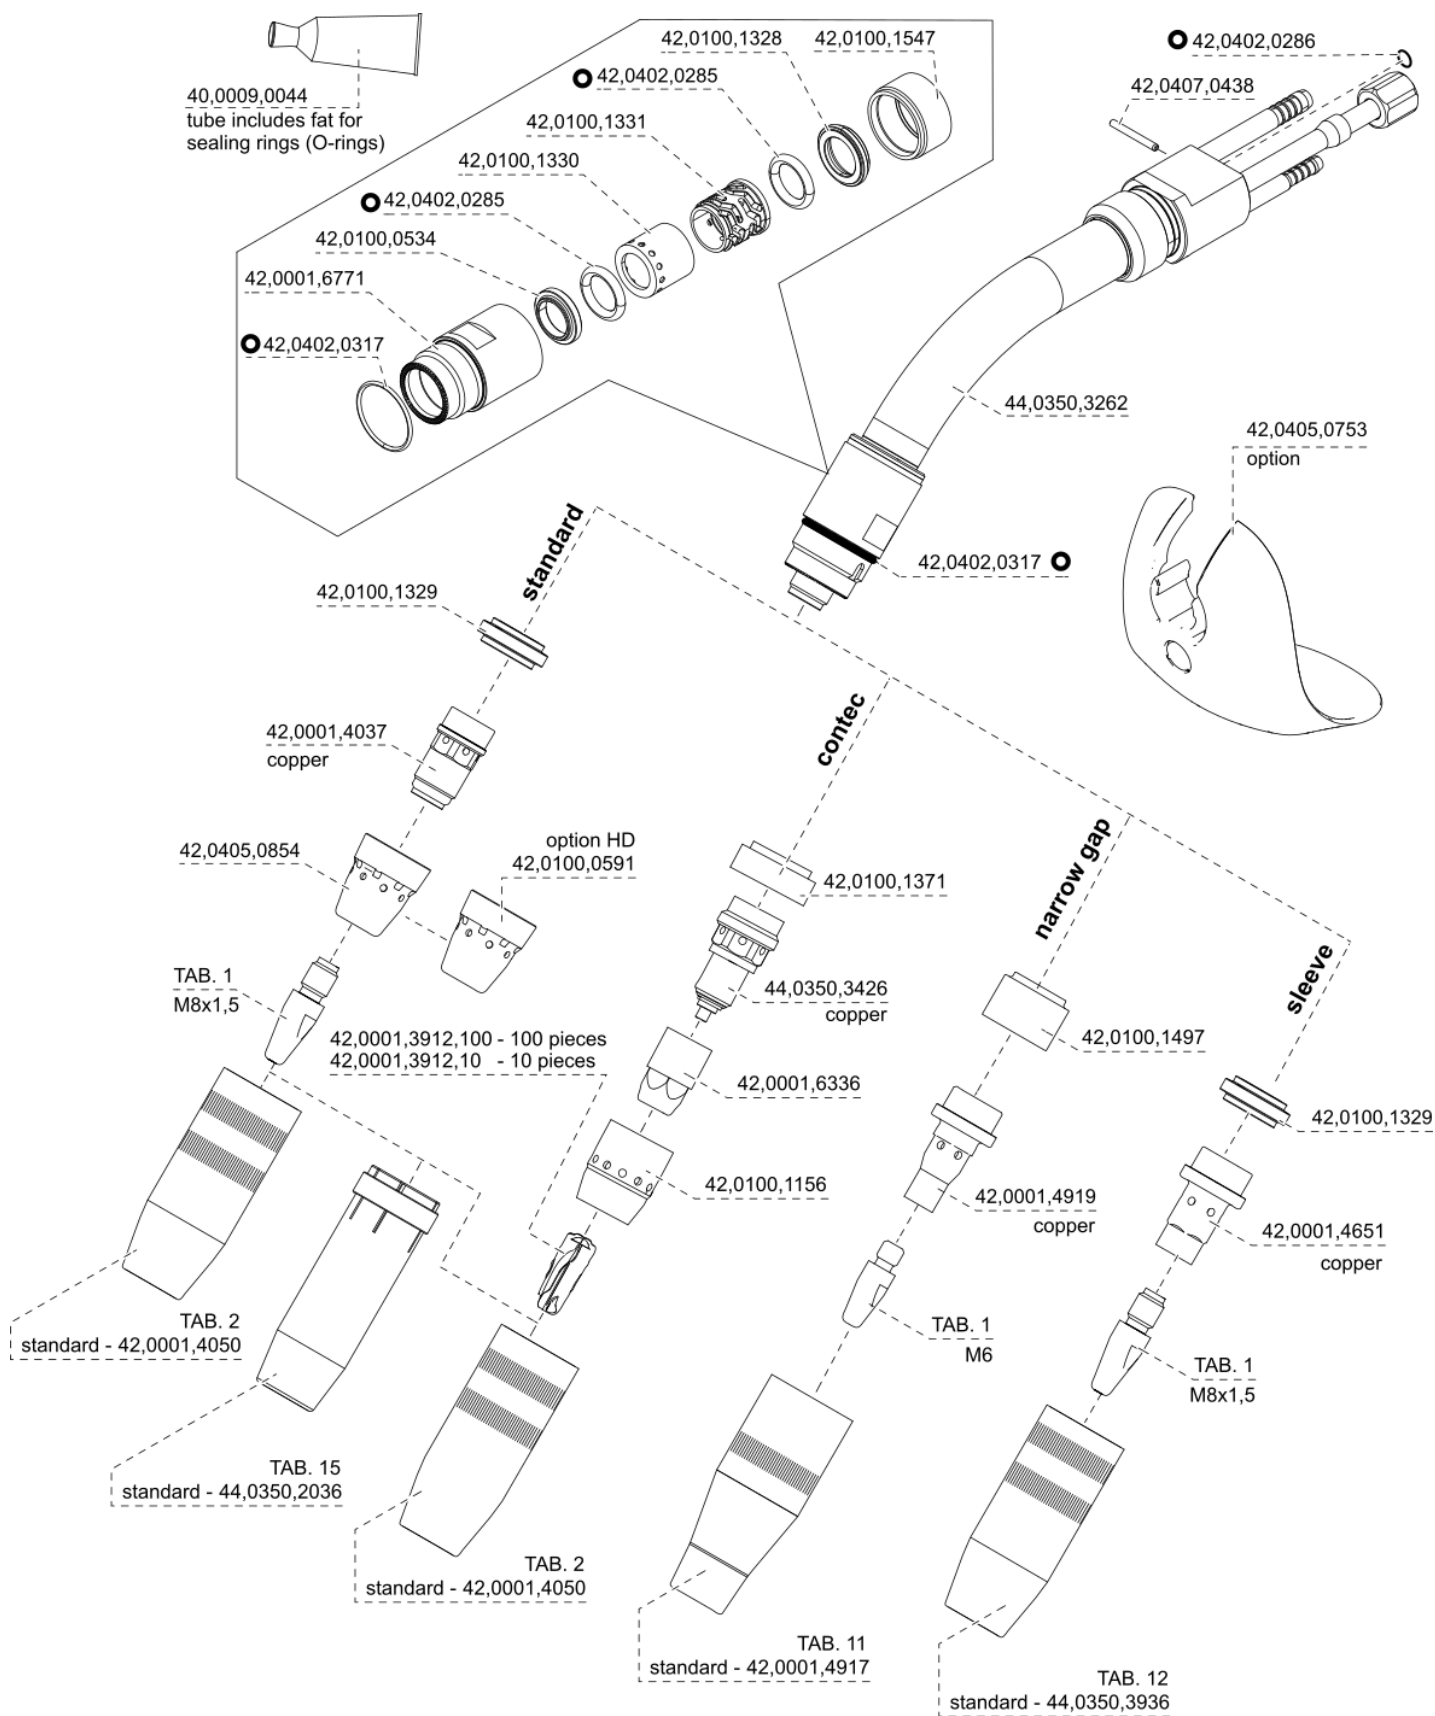
OPT/i T-Handle SET for Push 44,0350,5298



OPT/i Button extension kit



MTW 500i /FSC/UD/4.5m/45°/LED (4,035,961)



MTW 500i /FSC/UD/4.5m/45°/LED (4,035,961)

TAB. 1 contact tip

M6	CuCrZr	3 Nm	Ø mm	Ø inch	Part No.
			0,6	0,023	42,0001,4928
			0,7	0,027	42,0001,6524,10
			0,8	0,030	42,0001,4461,10
			0,9	0,035	42,0001,4462,10
			1,0	0,040	42,0001,4463,10
			1,1	0,043	42,0001,6527,10
			1,2	0,045	42,0001,4464,10
			1,3	0,051	42,0001,6529,10
			1,4	0,052	42,0001,4465,10
			1,5	0,059	42,0001,6522,10
			1,6	0,062	42,0001,4466,10

TAB. 1 contact tip

M8x1,5	CuCrZr	5 Nm	Ø mm	Ø inch	Part No.
			0,7	0,027	42,0001,6482,10
			0,8	0,030	42,0001,6464,10
			0,9	0,035	42,0001,6465,10
			1,0	0,040	42,0001,6466,10
			1,1	0,043	42,0001,6483,10
			1,2	0,045	42,0001,6467,10
			1,3	0,051	42,0001,6484,10
			1,4	0,052	42,0001,6468,10
			1,5	0,059	42,0001,6485,10
			1,6	0,062	42,0001,6469,10
			1,8	0,071	42,0001,6470,10
			2,0	0,078	42,0001,6471,10
			2,4	0,095	42,0001,6472,10
			2,8	0,110	42,0001,4642,10


M6	CuCrZr	3 Nm	Ø mm	Ø inch	Part No.
			0,8	0,030	42,0001,6525,10
			1,0	0,040	42,0001,6526,10
			1,2	0,045	42,0001,6528,10
			1,6	0,062	42,0001,6523,10

M8x1,5	CuCrZr	5 Nm	Ø mm	Ø inch	Part No.
			0,8	0,030	42,0001,6537,10
			1,0	0,040	42,0001,4750,10
			1,2	0,045	42,0001,4751,10
			1,6	0,062	42,0001,4752,10


M6	E-Cu	3 Nm	Ø mm	Ø inch	Part No.
			0,9	0,035	42,0001,7025,10
			1,0	0,040	42,0001,7026,10
			1,2	0,045	42,0001,7027,10

M8x1,5	E-Cu	5 Nm	Ø mm	Ø inch	Part No.
			0,9	0,035	42,0001,7028,10
			1,0	0,040	42,0001,7029,10
			1,2	0,045	42,0001,7030,10


TAB. 2 gas nozzle

		d1		d2		d3		L		Part No.	
		mm	inch	mm	inch	mm	inch	mm	inch		
		13	0.51	25	0.98	16,4	0.64	59	2.32	42,0001,4085	
		15	0.59	25	0.98	18,6	0.73	59	2.32	42,0001,4048	
		13	0.51	25	0.98	16,4	0.64	61	2.40	42,0001,4086	
		15	0.59	25	0.98	18,1	0.71	61	2.40	42,0001,4474	
		15	0.59	27	1.06	20,2	0.80	61	2.40	42,0001,4789	
		17	0.71	25	0.98	20,8	0.82	61	2.40	42,0001,4476	
		13	0.51	25	0.98	16,4	0.64	63	2.48	42,0001,4497	AI
		13	0.51	25	0.98	16,4	0.64	63	2.48	42,0001,4080	
		15	0.59	25	0.98	18,6	0.73	61	2.40	42,0001,4496	AI
		15	0.59	25	0.98	18,6	0.73	63	2.48	42,0001,4051	
		17	0.71	25	0.98	20,8	0.82	61	2.40	42,0001,4494	AI
		17	0.71	25	0.98	20,8	0.82	63	2.48	42,0001,4050	
		17	0.71	27	1.06	20,8	0.82	63	2.48	42,0001,4216	
		21	0.82	25	0.98	25,0	0.98	63	2.48	42,0001,4054	
		15	0.59	25	0.98	18,6	0.73	68	2.68	42,0001,4052	
		17	0.71	25	0.98	20,8	0.82	68	2.68	42,0001,4049	


TAB. 11 gas nozzle

		d1		d2		d3		L		Part No.	
		mm	inch	mm	inch	mm	inch	mm	inch		
		13	0.51	ø25	0.98	16	0.63	62,5	2.46	42,0001,4917	
		10	0.39	ø25	0.98	16	0.63	68,0	2.68	42,0001,6715	
		13	0.51	ø25	0.98	16	0.63	68,0	2.68	42,0001,6716	
		13	0.51	ø25	0.98	16	0.63	74,5	2.93	42,0001,4918	

TAB. 12 gas nozzle

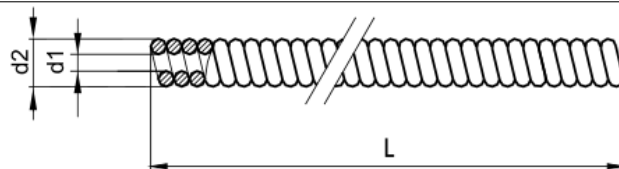
		d1		d2		d3		L		Part No.	
		mm	inch	mm	inch	mm	inch	mm	inch		
		15	0.59	ø25	0.98	18,6	0.73	61	2.40	44,0350,3935	
		17	0.66	ø25	0.98	20,8	0.82	61	2.40	44,0350,3936	


TAB. 15 gas nozzle

		d1		d2		d3		L		Part No.	
		mm	inch	mm	inch	mm	inch	mm	inch		
		17	0.66	ø27	1.06	22,2	0.87	85	3.34	44,0350,2036	

MTW 500i /FSC/UD/4.5m/45°/LED (4,035,961)

Tab. 3



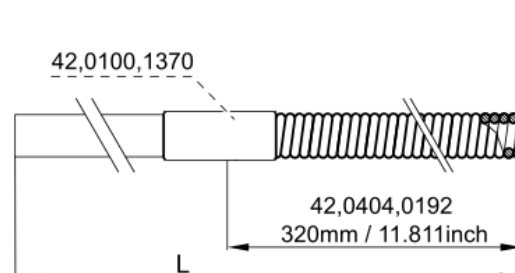
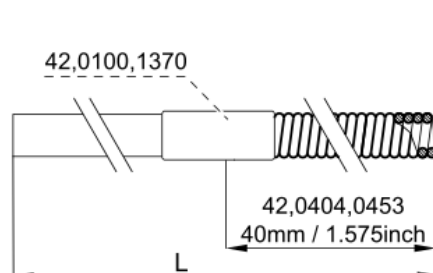
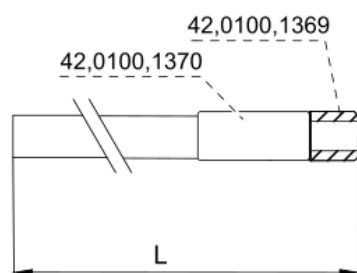
material			d1		d2		Part No. L		Part No. L		Part No. L	
	Ø mm	Ø inch	mm	inch	mm	inch	5m	16.4feet	15m	49.2feet	50m	160feet
Steel liner	0,8	.030	1,4	.055	4,4	.176	40,0002,0040,005		40,0002,0040,015		40,0002,0040,050	
Steel liner	0,9-1,0	.035/.040	1,6	.062	4,8	.189	40,0002,0041,005		40,0002,0041,015		40,0002,0041,050	
Steel liner	1,2	.045	1,9	.074	4,9	.192	40,0002,0042,005		40,0002,0042,015		40,0002,0042,050	
Steel liner	1,4-1,6	.052/.062	2,5	.098	4,9	.192	40,0002,0043,005		40,0002,0043,015		40,0002,0043,050	
CrNi liner	0,8	.030	1,4	.055	4,4	.176	40,0002,0044,005		40,0002,0044,015		40,0002,0044,050	
CrNi liner	0,9-1,0	.035/.040	1,6	.062	4,8	.189	40,0002,0045,005		40,0002,0045,015		40,0002,0045,050	
CrNi liner	1,2	.045	1,9	.074	4,9	.192	40,0002,0046,005		40,0002,0046,015		40,0002,0046,050	
CrNi liner	1,4-1,6	.052/.062	2,5	.098	4,9	.192	40,0002,0047,005		40,0002,0047,015		40,0002,0047,050	
Steel liner coated	0,8	.030	1,4	.055	4,4	.176	40,0002,0052,005		40,0002,0052,015		40,0002,0052,050	
Steel liner coated	0,9-1,0	.035/.040	1,6	.062	4,8	.189	40,0002,0053,005		40,0002,0053,015		40,0002,0053,050	
Steel liner coated	1,2	.045	1,9	.074	4,9	.192	40,0002,0054,005		40,0002,0054,015		40,0002,0054,050	
Steel liner coated	1,4-1,6	.052/.062	2,5	.098	4,9	.192	40,0002,0055,005		40,0002,0055,015		40,0002,0055,050	


Tab. 3

combi liner W AL

combi liner G AL




combi inner liner G



		L		d1		d2		combi liner W AL	combi liner G AL	combi inner liner G
Ø mm	Ø inch	m	feet	mm	inch	mm	inch	Part No.	Part No.	Part No.
0,8	.030	2,0	6.5	1,2	.059	4,7	.185	44,0350,3388	44,0350,3400	44,0350,5550
0,8	.030	3,8	12.4	1,2	.059	4,7	.185	44,0350,3392	44,0350,3404	44,0350,5513
0,8	.030	4,8	15.7	1,2	.059	4,7	.185	44,0350,3396	44,0350,3408	44,0350,5518
0,9-1,0	.035/.040	2,0	6.5	1,5	.062	4,7	.185	44,0350,3389	44,0350,3401	44,0350,5551
0,9-1,0	.035/.040	3,8	12.4	1,5	.062	4,7	.185	44,0350,3393	44,0350,3405	44,0350,5514
0,9-1,0	.035/.040	4,8	15.7	1,5	.062	4,7	.185	44,0350,3397	44,0350,3409	44,0350,5519
1,2	.045	2,0	6.5	1,8	0.74	4,7	.185	44,0350,3390	44,0350,3402	44,0350,5552
1,2	.045	3,8	12.4	1,8	0.74	4,7	.185	44,0350,3394	44,0350,3406	44,0350,5515
1,2	.045	4,8	15.7	1,8	0.74	4,7	.185	44,0350,3398	44,0350,3410	44,0350,5520
1,4-1,6	.052/.062	2,0	6.5	2,4	.098	4,7	.185	44,0350,3391	44,0350,3403	44,0350,5553
1,4-1,6	.052/.062	3,8	12.4	2,4	.098	4,7	.185	44,0350,3395	44,0350,3407	44,0350,5516
1,4-1,6	.052/.062	4,8	15.7	2,4	.098	4,7	.185	44,0350,3399	44,0350,3411	44,0350,5521
2,0	.045	2,0	6.5	1,2	.059	4,7	.185	44,0350,3615	44,0350,3618	44,0350,5554
2,0	.045	3,8	12.4	3,0	.118	4,7	.185	44,0350,3616	44,0350,3619	44,0350,5517
2,0	.045	4,8	15.7	3,0	.118	4,7	.185	44,0350,3617	44,0350,3620	44,0350,5522

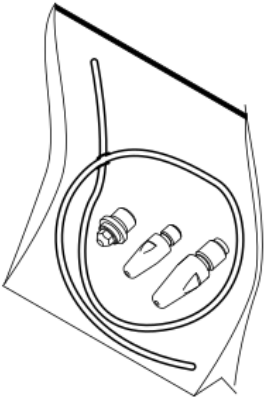
MTW 500i /FSC/UD/4.5m/45°/LED (4,035,961)

TAB. 4 clamping piece

 Ø mm Ø inch		Fe / CrNi	Alu / CuSi	colour	
0,8	.031		44,0350,3314	grey	
0,8	.031	44,0350,3315		grey	
0,9-1,0	.039	44,0350,3317		blue	
1,2	.047	44,0350,3318		red	
1,4-1,6	.062	44,0350,3320		black	
2,0	.078		44,0350,3321	green	
2,4	.095		44,0350,4245	brown	 only stuck
2,0	.078	42,0001,4589			
2,4	.095				
2,8	.110				

MTW 500i /FSC/UD/4.5m/45°/LED (4,035,961)

basic kits


	Ø mm	Ø inch	m	feet	Fe MTG / MTW Part No.	CrNi MTG / MTW Part No.	Alu MTW Part No.	CuSi MTW Part No.	Alu/CuSi MTG Part No.
	0,6	.023	5,0	11.5	44,0350,5296	X	X		X
	0,8	.030	5,0	11.5	44,0350,5117	44,0350,5158	44,0350,5135		44,0350,5144
	0,9	.035	5,0	14.8	44,0350,5118	44,0350,5159	44,0350,5136		44,0350,5145
	1,0	.040	5,0	11.5	44,0350,5119	44,0350,5160	44,0350,5137		44,0350,5146
	1,2	.047	5,0	14.8	44,0350,5120	44,0350,5161	44,0350,5138		44,0350,5147
	1,4	.052	5,0	11.5	44,0350,5121	44,0350,5162	44,0350,5139		44,0350,5148
	1,6	.062	5,0	14.8	44,0350,5122	44,0350,5163	44,0350,5140		44,0350,5149
	2,0	.078	5,0	14.8	X	X	44,0350,5141		X

MTW 500i /FSC/UD/4.5m/45°/LED (4,035,961)

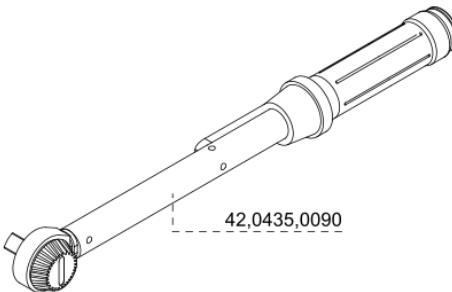
TOOLS

contact tip + nozzle stock


42,0201,3216



nozzle stock

nozzle stock	socket	torque	torque wrench 5-25 Nm
42,0001,4037 	42,0435,0236	8 Nm 	 42,0435,0090
44,0350,3426 	42,0435,0236	8 Nm 	
42,0001,4919 	42,0435,0233	8 Nm 	
42,0001,4651 	42,0435,0233	8 Nm 	

contact tip

contact tip	torque wrench	torque	torque driver
M6 	42,0001,6774	3 Nm 	 42,0411,0013
M8x1,5 	42,0001,6775	5 Nm 	