

FT series

PROFESSIONAL SPEAKER



pro audio




FT series is a group of regular professional speaker with the characteristics of clear and bright full-range sound, rich and elastic bass, all use high quality units. The cabinet is made of MDF with wear-resistant polyurea paint.

FEATURES

- High quality units
- MDF board
- Multi-hanging points and support, easy and quick operation

APPLICATIONS

- Conference rooms
- Multi-purpose halls
- Various entertainment venues
- Mobile performances

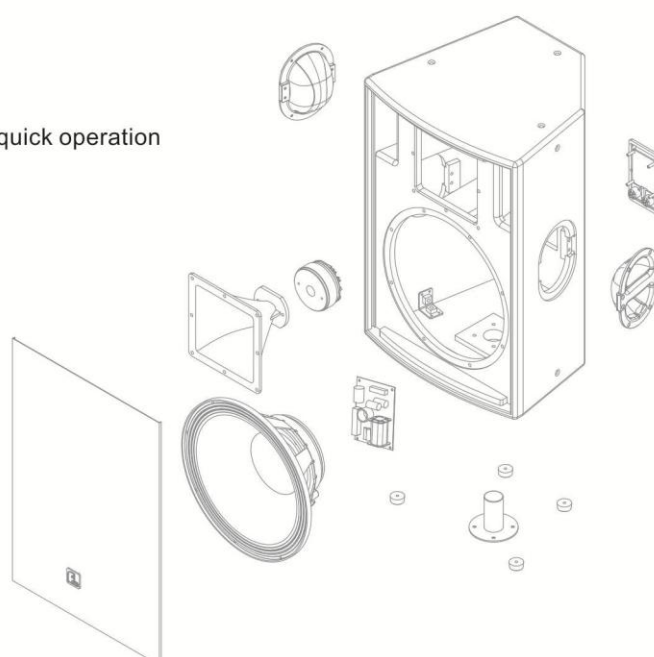



pro audio

FTseries Professional Speaker

Two-way Full-range Loudspeaker System



MODEL	FT82	FT102	FT122
FREQUENCY RESPONSE(-3dB)	55Hz-18kHz	50Hz-18kHz	45Hz-20kHz
FREQUENCY RESPONSE(-10dB)	50Hz-20kHz	45Hz-20kHz	40Hz-20kHz
LF DRIVER	1×8"/1.5" voice coil	1×10"/2" voice coil	1×12"/2.5" voice coil
HF DRIVER	1×1"/1" voice coil	1×1"/1" voice coil	1×1"/1.4" voice coil
RATED POWER	100W RMS,400W peak	150W RMS,600W peak	250W RMS,1000W peak
SENSITIVITY(1 watt/1 meter)	92dB	95dB	96dB
MAXIMUM SPL	112dB continuous,118dB peak	117dB continuous,123dB peak	120dB continuous,126dB peak
IMPEDANCE	8 ohms	8 ohms	8 ohms
DISPERSION(-6dB)	90°×50°	90°×50°	80°×50°
CROSSOVER FREQUENCIES	2.5 kHz	2.2 kHz	2.2 kHz
INPUT CONNECTORS	2×Speakon NL4	2×Speakon NL4	2×Speakon NL4
PACKAGE SIZE	606×378×525 mm (1 Pair)	440×391×580 mm	482×452×645 mm
NET WEIGHT	9 kg/pc	13 kg/pc	18 kg/pc
GROSS WEIGHT	21kg/pair	15 kg/pc	21 kg/pc

FTseries Professional Speaker


Two-way Full-range Loudspeaker System




MODEL	FT152	FT2152
FREQUENCY RESPONSE(-3dB)	40Hz-20kHz	40Hz-20kHz
FREQUENCY RESPONSE(-10dB)	35Hz-20kHz	35Hz-20kHz
LF DRIVER	1 × 15"/ 2.5" voice coil	2 × 15"/ 3" voice coil
HF DRIVER	1 × 1"/ 1.4"voice coil	1 × 1"/ 1.7"voice coil
RATED POWER	300W RMS, 1200W peak	800W RMS, 3200W peak
SENSITIVITY(1watt/1meter)	97dB	100dB
MAXIMUM SPL	122dB continuous, 128dB peak	129dB continuous, 135dB peak
IMPEDANCE	8 ohms	4 ohms
DISPERSION(-6dB)	80° × 50°	70° × 40°
CROSSOVER FREQUENCIES	2kHz	2.2 kHz
INPUT CONNECTORS	2 × Speakon NL4	2 × Speakon NL4
PACKAGE SIZE	563 × 535 × 775 mm	695 × 604 × 1245 mm
NET WEIGHT	26 kg/pc	52 kg/pc
GROSS WEIGHT	29 kg/pc	59 kg/pc

FT Configuration


FT82

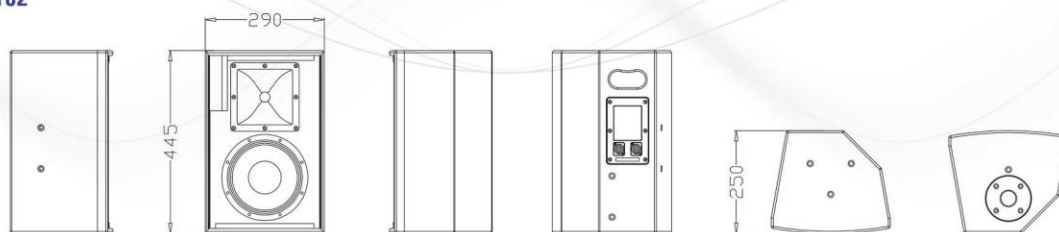


FT102

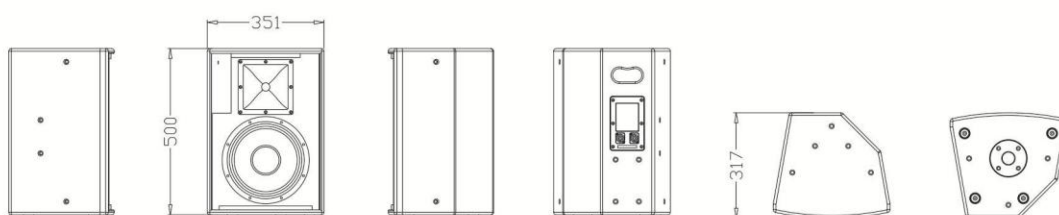

FT122

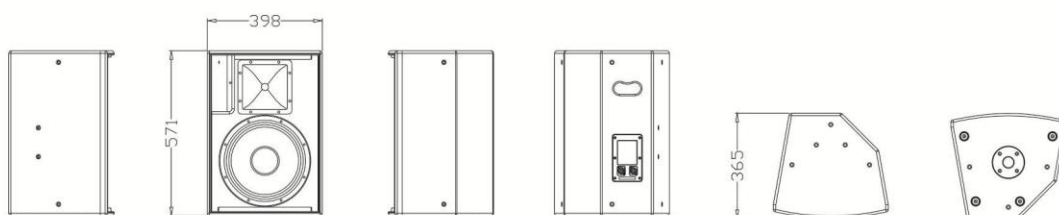

FT152

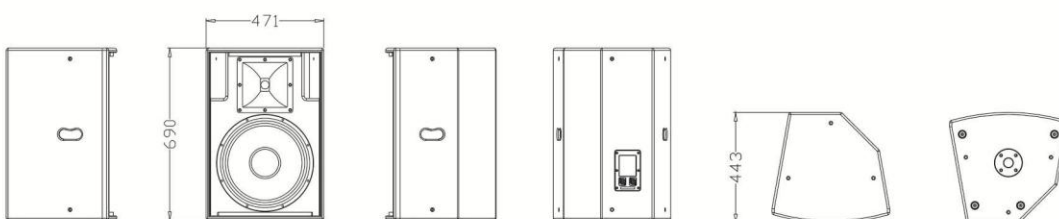

FT2152

