



pro audio

# KR series

ENTERTAINMENT SPEAKER




**KR series is a group of full-range speakers** specially designed for fixed installation in entertainment venues. transparent and bright mid-high frequency, rich and enveloping bass, and the horn can be rotated according to the environment. The cabinet is made of multi-layer composite plywood with wear-resistant polyurea paint.

## FEATURES

- High quality units
- Multi-hanging points to meet different demands of installation
- Back vented design with more rich bass

## APPLICATIONS

- KTV and other entertainment venues
- family entertainment room

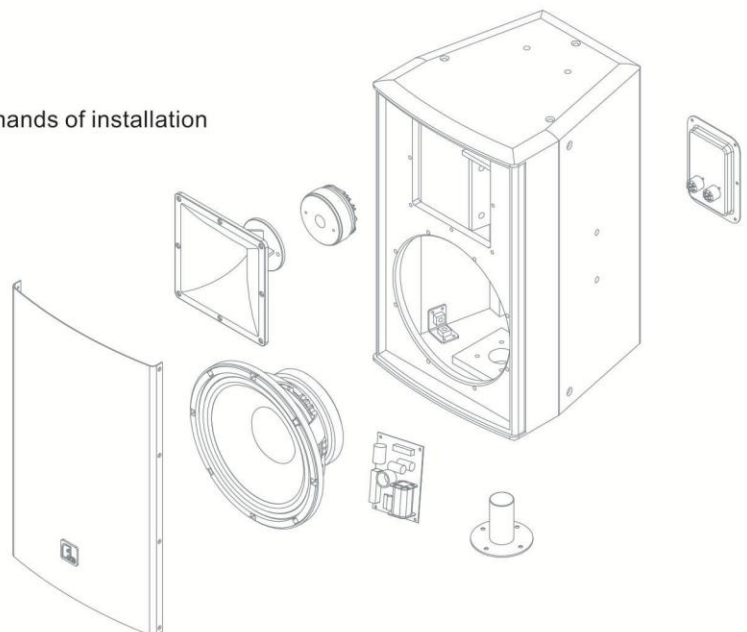

# KR series Entertainment Speaker

Two-way Full-range Loudspeaker System




pro audio




| MODEL                     | KR10                        | KR12                        | KR15                        |
|---------------------------|-----------------------------|-----------------------------|-----------------------------|
| FREQUENCY RESPONSE(-3dB)  | 55Hz-18kHz                  | 50Hz-20kHz                  | 45Hz-18kHz                  |
| FREQUENCY RESPONSE(-10dB) | 50Hz-20kHz                  | 45Hz-20kHz                  | 50Hz-20kHz                  |
| LF DRIVER                 | 1 × 10"/ 2.5"voice coil     | 1 × 12"/ 2.5"voice coil     | 1 × 15"/ 3"voice coil       |
| HF DRIVER                 | 1 × 1"/ 1.7"voice coil      | 1 × 1"/ 1.7"voice coil      | 1 × 1"/ 1.7"voice coil      |
| RATED POWER               | 250W RMS,1000W peak         | 300W RMS,1200W peak         | 400W RMS,1600W peak         |
| SENSITIVITY(1watt/1meter) | 95dB                        | 97dB                        | 98dB                        |
| MAXIMUM SPL               | 119dB continuous,126dB peak | 122dB continuous,128dB peak | 124dB continuous,130dB peak |
| IMPEDANCE                 | 8 ohms                      | 8 ohms                      | 8 ohms                      |
| DISPERSION(-6dB)          | 100° × 70°                  | 100° × 70°                  | 100° × 70°                  |
| CROSSOVER FREQUENCIES     | 2.3kHz                      | 2.3KHz                      | 2.5kHz                      |
| INPUT CONNECTORS          | 2 × Speakon NL4             | 2 × Speakon NL4             | 2 × Speakon NL4             |
| PACKAGE SIZE              | 430 × 390 × 619mm           | 472 × 440 × 695 mm          | 540 × 540 × 795 mm          |
| NET WEIGHT                | 16 kg/pc                    | 20 kg/pc                    | 26 kg/pc                    |
| GROSS WEIGHT              | 19 kg/pc                    | 22 kg/pc                    | 29 kg/pc                    |

## KR Configuration

### KR10

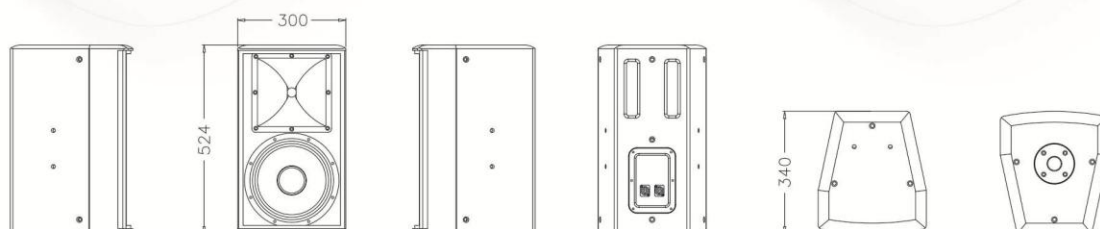

### KR12

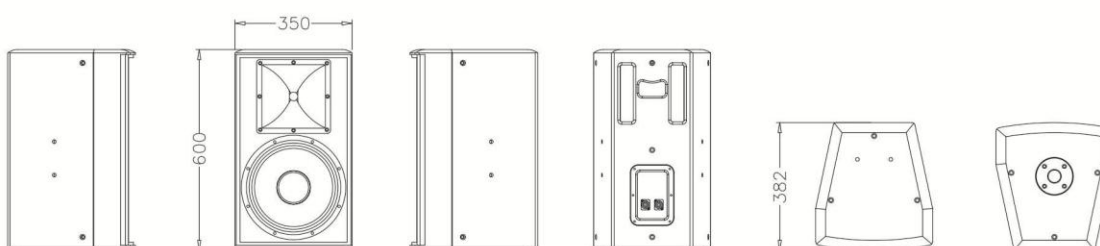

### KR15

