

LH series

PORTABLE SPEAKER



pro audio




The LH series is a group of portable professional speaker with the characteristics of light weight, high power, high SPL, clear and bright sound, all use neodymium units, the HF driver horn can be rotated. The cabinet is made of multi-layer composite plywood with wear-resistant polyurea paint.

FEATURES

- High quality units, high strength plywood
- Light weight, easy to transport and install
- Multi-hanging points and support, easy and quick operation

APPLICATIONS

- Meeting rooms
- Multi-purpose halls
- Various entertainment venues
- Mobile performances

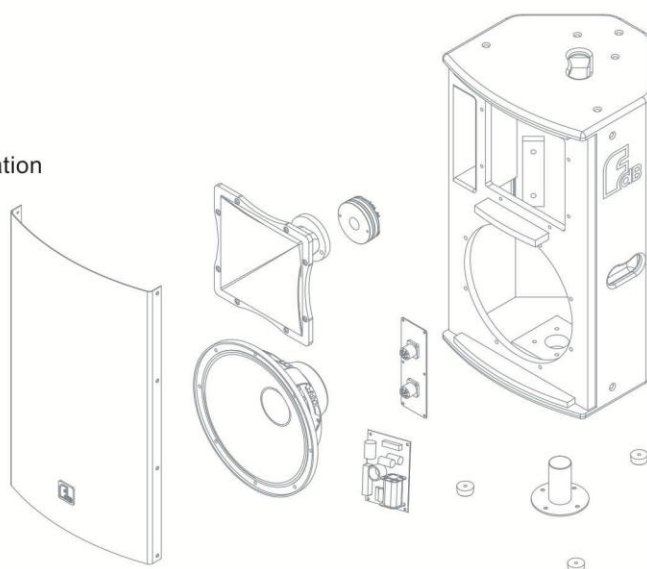



pro audio

LH series Portable Speaker

Two-way Full-range Loudspeaker System



MODEL	LH8 II	LH10 II	LH12 II
FREQUENCY RESPONSE(-3dB)	80 Hz-18kHz	60 Hz-18kHz	55 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	75 Hz-20kHz	55 Hz-20kHz	50 Hz-20kHz
LF DRIVER	1×8" Neo / 2"voice coil	1×10" Neo / 3"voice coil	1×12" Neo / 3"voice coil
HF DRIVER	1×1" Neo / 1.7"voice coil	1×1" Neo / 1.7"voice coil	1×1" Neo / 1.7"voice coil
RATED POWER	150W RMS,600W peak	250W RMS,1000W peak	300W RMS,1200W peak
SENSITIVITY(1watt/1meter)	93dB	96dB	97dB
MAXIMUM SPL	115dB continuous,121 dB peak	120dB continuous,126 dB peak	122dB continuous,128 dB peak
IMPEDANCE	8 ohms	8 ohms	8 ohms
DISPERSION(-6dB)	90°×50°	90°×50°	90°×40°
CROSSOVER FREQUENCIES	2.3kHz	2.5kHz	2.5kHz
INPUT CONNECTORS	2×Speakon NL4	2×Speakon NL4	2×Speakon NL4
PACKAGE SIZE	344×296×539 mm	388×376×600 mm	464×444×750 mm
NET WEIGHT	8 kg/pc	13 kg/pc	17 kg/pc
GROSS WEIGHT	9 kg/pc	14 kg/pc	19 kg/pc

LH series Portable Speaker


Two-way Full-range Loudspeaker System




MODEL	LH15 II	LH15H II
FREQUENCY RESPONSE(-3dB)	45 Hz-18kHz	45 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	40 Hz-20kHz	40 Hz-20kHz
LF DRIVER	1 × 15" Neo / 3"voice coil	1 × 15" Neo / 4"voice coil
HF DRIVER	1 × 1.4" Neo / 3"voice coil	1 × 1.4" Neo / 3"voice coil
RATED POWER	400W RMS,1600W peak	600W RMS,2400W peak
SENSITIVITY(1watt/1meter)	98dB	98dB
MAXIMUM SPL	124dB continuous,130 dB peak	126dB continuous,132 dB peak
IMPEDANCE	8 ohms	8 ohms
DISPERSION(-6dB)	90° × 40°	90° × 40°
CROSSOVER FREQUENCIES	1.5kHz	1.5kHz
INPUT CONNECTORS	2 × Speakon NL4	2 × Speakon NL4
PACKAGE SIZE	536 × 520 × 807 mm	536 × 520 × 807 mm
NET WEIGHT	23 kg/pc	26 kg/pc
GROSS WEIGHT	26 kg/pc	29 kg/pc

LH Configuration


LH8 II

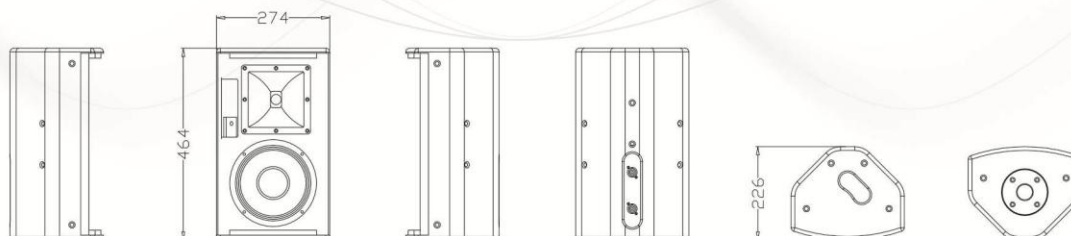


LH10 II

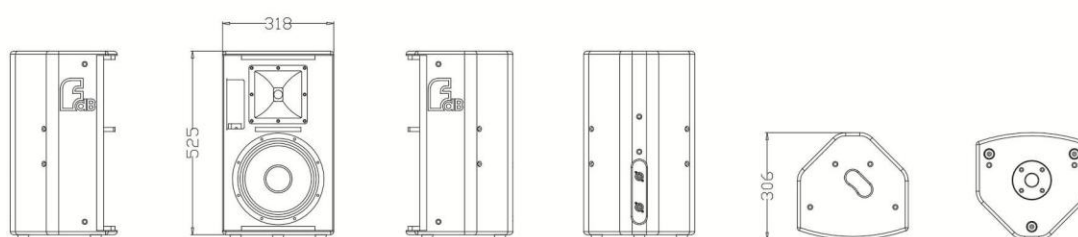

LH12 II

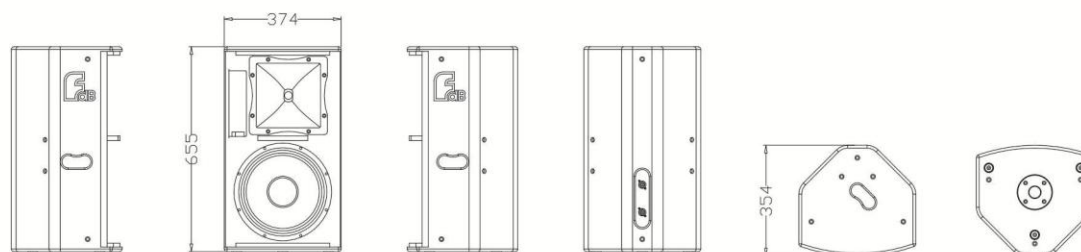

LH15 II

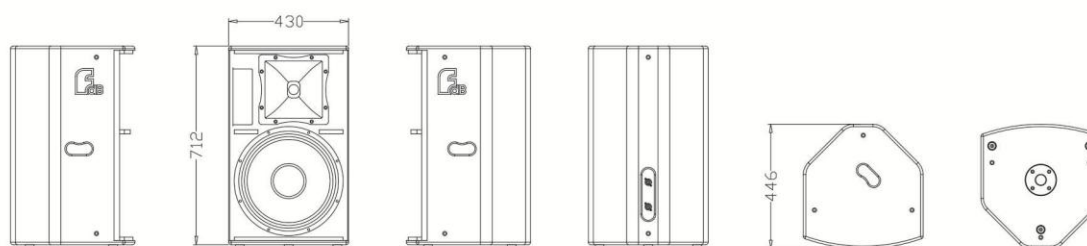

LH15H II

