

Technical Data Sheet

CODE 61460

NORDIK 1S 160/60 SENZA G.C.

Ceiling fans with or without light




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,34	Airflow speed at max speed (m/s)	1,34
Absorbed Power max (W)	70	Delivery max (m³/h)	14000
Blades diameter	160	Delivery max (m³/min)	233,33
Frequency (Hz)	50	giri_minuto	215
Insulation Class	I°	RPM	215
Voltage (V)	220-240	Service value (m³/min)/W	3,333
Weight (Kg)	6,6	Sound power level Lw [dB(A)]	55,5

DIMENSIONS

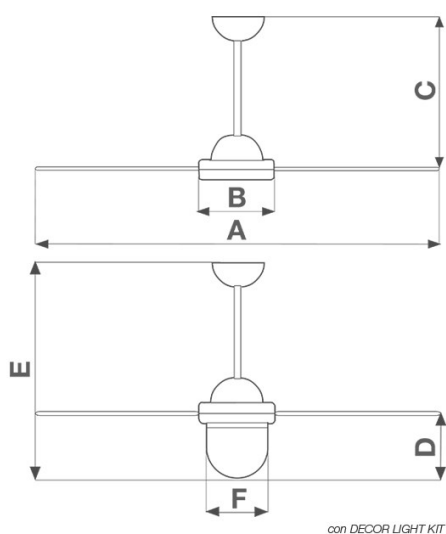

Size A (mm)	Ø 1524
Size B (mm)	Ø 230
Size C (mm)	495

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61460

NORDIK 1S 160/60 SENZA G.C.

Ceiling fans with or without light



DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 1600 mm.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow: 14,000 m³/h.
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Speed selectable by way of control units or Telenordik 5T remote control (optional)

ACCESSORIES



SCNR5 UNIF.X NK SOFFITTO

Code 12955



ASTA NK 275 BIANCA

Code 22034



ASTA NK 350 BIANCA

Code 22040



ASTA NK 200 BIANCA

Code 22030



ASTA NK 1000 BIANCA

Code 22075



ASTA NK 500 BIANCA

Code 22052



ASTA NK 750 BIANCA

Code 22072



KIT SCB5 (TRASF.5 V.)

Code 22483



KIT SCB (TRASF.E.C.)

Code 22481



TELENORDIK 5T

Code 22387



C 2.5 (COMANDO EL. 2.5 A)

Code 12967

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com



**SC 503 B**

Code 12801

**SC 503 N**

Code 12802

**SC EXT B**

Code 12803

**SCI503**

Code 22461

**PSC-W**

Code 22462

**PSC-B**

Code 22463

**SET PALE
160/60 DESIGN
BIANCO INT**

Code 22644

**VORT DELTA T**

Code 13039